

2941659

https://www.phoenixcontact.com/us/products/2941659

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Input solid-state relay terminal block, input: 120 V DC, output: 3 - 48 V DC/100 mA, terminal block width: 6.2 mm

Your advantages

- · Actuator version available
- EB-DIK insertion bridges
- · Labeling and mounting with user-friendly modular terminal blocks
- · Wear-free switching of up to 24 V DC/10 A or 240 V AC/800 mA
- · Integrated output protective circuit
- · Electrical isolation between input and output at up to 2.5 kVrms
- Integrated input circuit
- · Status indicator
- · Zero voltage switch at AC output

Commercial data

| Item number | 2941659 |
|--------------------------------------|---------------------|
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | C460 |
| Product key | CK61A1 |
| Catalog page | Page 442 (C-5-2019) |
| GTIN | 4017918080563 |
| Weight per piece (including packing) | 20.93 g |
| Weight per piece (excluding packing) | 20.72 g |
| Customs tariff number | 85364900 |
| Country of origin | CN |



2941659

https://www.phoenixcontact.com/us/products/2941659

Technical data

Notes

| Order information: | The housing is open on one side. The appropriate cover is D- DEK 1,5 GN (2716949). |
|---------------------|--|
| Note on application | Use of EB 80-DIK bridges in the DEK terminal blocks: Absorption of humidity from the ambient air as well as an unfavorable tolerance between a larger number of DEK terminal blocks and the EB 80-DIK bridge may cause (minor) expansion of the DEK housing. When the EB 80-DIK bridges are used, therefore, it is recommended that these be disconnected after about 10 to 12 DEK terminal blocks and a wire bridge to the next DEK terminal block be inserted in their place. |

Product properties

| Product type | Solid-state relay module |
|--|--------------------------|
| Product family | DEK |
| Application | Output function |
| Operating mode | 100% operating factor |
| Insulation characteristics | |
| Insulation | Basic insulation |
| Insulation characteristics: Standards/regulations | |
| Insulation | Basic insulation |
| Overvoltage category | Ш |
| Pollution degree | 2 |
| ectrical properties | |
| Test voltage (Input/output) | 2.5 kV AC (Input/output) |
| put data | |
| Nominal input voltage U _N | 120 V AC |
| Input voltage range in reference to U_N | 0.9 1.1 |
| Input voltage range | 108 V AC 132 V AC |
| Switching threshold "0" signal in reference to ${\rm U}_{\rm N}$ | ≤ 0.4 |
| Switching threshold "1" signal in reference to ${\rm U}_{\rm N}$ | ≥ 0.8 |
| Typical input current at U _N | 3.2 mA |
| | 0.2 10 1 |
| Typical response time | 10 ms |

Typical input current at U_N 3.2 mA Typical response time 10 ms Typical turn-off time 20 ms Operating voltage display Yellow LED Protective circuit Reverse polarity protection Surge protection Surge protection Transmission frequency 3 Hz

Output data

| Contact switching type | 1 N/O contact |
|------------------------|---------------|
|------------------------|---------------|



2941659

https://www.phoenixcontact.com/us/products/2941659

| Design of digital output | electronic |
|--|--|
| Output voltage range | 3 V DC 48 V DC |
| Limiting continuous current | 100 mA |
| Voltage drop at max. limiting continuous current | ≤ 0.9 V |
| Output circuit | 2-conductor floating, 3-conductor ground-referenced |
| Protective circuit | Reverse polarity protection; Polarity protection diode |
| | Freewheeling diode; Freewheeling diode |
| Output resistor | approx. 22 k Ω (for 3-conductor operation) |

Connection data

| Connection method | Screw connection |
|----------------------------------|---|
| Stripping length | 8 mm |
| Screw thread | M3 |
| Conductor cross section rigid | 0.2 mm ² 2.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² 2.5 mm ² |
| Conductor cross section AWG | 24 14 |
| Tightening torque | 0.5 Nm |

Dimensions

| Width | 6.2 mm |
|--------|--------|
| Height | 80 mm |
| Depth | 56 mm |

Material specifications

| Color | green (RAL 6021) |
|-------|------------------|
|-------|------------------|

Environmental and real-life conditions

| Ambient conditions | |
|--------------------|--|
|--------------------|--|

| Ambient temperature (operation) | -20 °C 60 °C |
|---|--------------|
| Ambient temperature (storage/transport) | -20 °C 70 °C |

Standards and regulations

| Standards/regulations | |
|-----------------------|---------------|
| Standards/regulations | IEC 60947-5-1 |
| | |

Mounting

| Mounting type | DIN rail mounting |
|-------------------|---------------------------|
| Assembly note | in rows with zero spacing |
| Mounting position | any |




2941659

https://www.phoenixcontact.com/us/products/2941659

Drawings

Circuit diagram

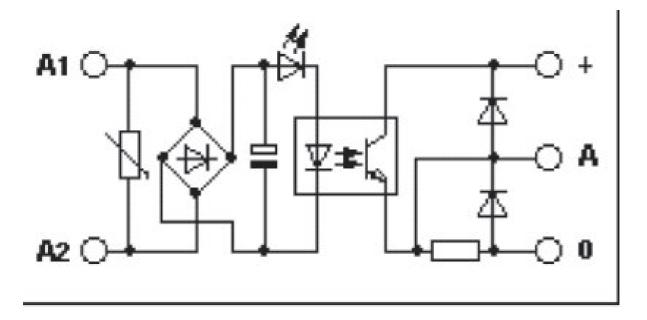



2941659

https://www.phoenixcontact.com/us/products/2941659

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2941659

| . | CUL Recognized Approval ID: FILE E 238705 |
|----------|--|
| | |
| A | UL Recognized Approval ID: FILE E 238705 |
| | |
| | EAC Approval ID: RU C-DE.A*30.B.01742 |
| | |
| cUl | Lus Recognized |



2941659

https://www.phoenixcontact.com/us/products/2941659

Classifications

ECLASS

| ECLASS-11.0 | 27371604 |
|-------------|----------|
| ECLASS-12.0 | 27371604 |
| ECLASS-13.0 | 27371604 |

ETIM

| | ETIM 9.0 | EC001504 | | |
|--------|-------------|----------|--|--|
| UNSPSC | | | | |
| | UNSPSC 21.0 | 39122300 | | |



2941659

https://www.phoenixcontact.com/us/products/2941659

Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes |
|---|--|
| Exemption | 7(a), 7(c)-l |
| China RoHS | |
| nvironment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | d8befbd5-b846-43d8-939d-a921d79066f9 |
| | |



2941659

https://www.phoenixcontact.com/us/products/2941659

Accessories

0

Note: Applying some accessories below might limit this product.

EB 2- DIK RD - Insertion bridge

2716693 https://www.phoenixcontact.com/us/products/2716693



Insertion bridge, pitch: 6.15 mm, number of positions: 2, color: red



EB 3- DIK RD - Insertion bridge

2716745 https://www.phoenixcontact.com/us/products/2716745

Insertion bridge, pitch: 6.15 mm, number of positions: 3, color: red





2941659

https://www.phoenixcontact.com/us/products/2941659


EB 4- DIK RD - Insertion bridge

2716758

https://www.phoenixcontact.com/us/products/2716758



Insertion bridge, pitch: 6.15 mm, number of positions: 4, color: red



EB 5- DIK RD - Insertion bridge

2716761

https://www.phoenixcontact.com/us/products/2716761



Insertion bridge, pitch: 6.15 mm, number of positions: 5, color: red



2941659

https://www.phoenixcontact.com/us/products/2941659


EB 10- DIK RD - Insertion bridge

2716774

https://www.phoenixcontact.com/us/products/2716774



Insertion bridge, pitch: 6.15 mm, number of positions: 10, color: red



EB 80- DIK RD - Insertion bridge

2715953

https://www.phoenixcontact.com/us/products/2715953



Insertion bridge, pitch: 6.2 mm, number of positions: 80, color: red



2941659

https://www.phoenixcontact.com/us/products/2941659


EB 5- DIK BU - Insertion bridge

2716677

https://www.phoenixcontact.com/us/products/2716677



Insertion bridge, pitch: 6.15 mm, number of positions: 5, color: blue



EB 10- DIK BU - Insertion bridge

2716680

https://www.phoenixcontact.com/us/products/2716680



Insertion bridge, pitch: 6.15 mm, number of positions: 10, color: blue



2941659

https://www.phoenixcontact.com/us/products/2941659


EB 80- DIK BU - Insertion bridge

2715940

https://www.phoenixcontact.com/us/products/2715940



Insertion bridge, pitch: 6.2 mm, number of positions: 80, color: blue



D-DEK 1,5 GN - Separating plate

2716949

https://www.phoenixcontact.com/us/products/2716949

Cover for setting the end of a terminal row, color: green





2941659

https://www.phoenixcontact.com/us/products/2941659

ZB 6:UNBEDRUCKT - Zack marker strip

1051003

https://www.phoenixcontact.com/us/products/1051003



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: $6.15 \times 10.5 \text{ mm}$, Number of individual labels: 10 mm

ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016 https://www.phoenixcontact.com/us/products/1051016



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10



2941659

https://www.phoenixcontact.com/us/products/2941659

ZB 6/WH-100:UNBEDRUCKT - Zack marker strip

5060935

https://www.phoenixcontact.com/us/products/5060935



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 1000

DIKD 1,5 - Initiator/actuator terminal block

2715979 https://www.phoenixcontact.com/us/products/2715979



Initiator/actuator terminal block, nom. voltage: 250 V, nominal current: 24 A, connection method: Screw connection, 1st, 2nd and 3rd level, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com