SSR220DIN-DC22

Relay, SE Relays, solid state, SPST NO, 20A, 24 to 480 VAC, 4 to 32 VDC Uc, SCR, AC zero cross, 22 mm



Main

Mairi	
Range	Legacy
Product Type	Solid state relay
Maximum output current	20 A
Mounting Support	Panel DIN rail
Network Number of Phases	1 phase
Output Voltage	24280 V AC

Complementary

Complementary	
Input Current Limits	812 mA at 32 V DC typical
Switch Function	SPST
Contacts Type and Composition	NO
Tightening Torque	0.60.7 N.m for input 0.60.7 N.m for output
Connections Terminals	Input screw AWG 10) Output screw AWG 10)
Local Signalling	For input status 1 LED (green)
Switching Voltage	4 V DC turn-on 1 V DC turn-off
Switching Device	SCR output Zero voltage switching
Maximum Peak Voltage	600 V
Surge Current	250 A 16.6 ms
Voltage Drop	<1.6 V on-state
Maximum I²t for fusing	260 A².s 8.3 ms
Leakage Current	10 mA at off-state
DV/dt	500 V/µs off-state maximum
Response Time	8.33 ms (turn-on, turn-off)
Height	3.85 in (97.7 mm)
Width	0.88 in (22.4 mm)
Depth	3.15 in (80 mm)
Product Weight	9.88 oz (280 g)

Environment

Product Certifications	CSA[RETURN]CE
Ambient Air Temperature for Operation	-40176 °F (-4080 °C)
Ambient Air Temperature for Storage	-40257 °F (-40125 °C)

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3606480282799
Returnability	No
Country of origin	US

Packing Units


3		
Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	1.20 in (3.048 cm)	
Package 1 Width	4.30 in (10.922 cm)	
Package 1 Length	4.30 in (10.922 cm)	
Package 1 Weight	10.40 oz (294.835 g)	

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and
Camorna proposition co	lead compounds, which is known to the State of California to cause cancer
	and birth defects or other reproductive harm. For more information go to
	www.P65Warnings.ca.gov
REACh Regulation	☐ REACh Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	☐ China RoHS Declaration
RoHS exemption information	₫Yes
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

SSR220DIN-DC22

Approximate Dimensions

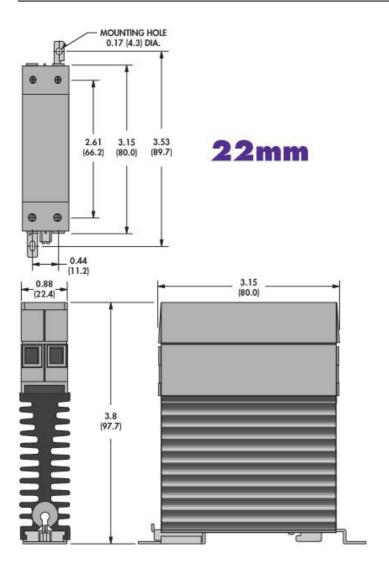

Connections and Wiring Diagrams

