

OWR-1228T-32B

Pistonic driver for earphones and earbuds

Driver targeted for Active Noise Control applications due to its large bandwidth and linearity. Both key parameters achieved by "pistonic" diaphragm design.




Characteristics


Size (ØxH) [mm]	12.0x3.5
Sensitivity [dBSPL]	124.0±3dB [179mV IEC-318 1KHz]
Impedance [Ω]	32
Power [W]	3.0 / 5.0
F0 [Hz]	580 on IEC 60318-4
Termination	Terminals

Specifications are subject to change without prior notice. Upon request Ole Wolff can supply further specifications, simulation parameters etc.


Mechanical drawing

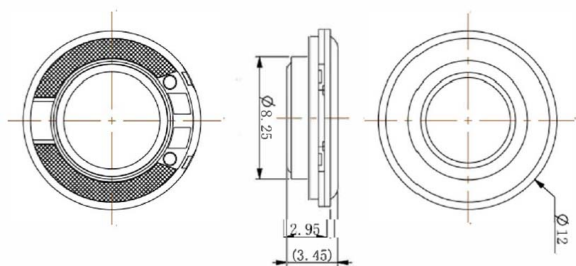


Sound Pressure Level

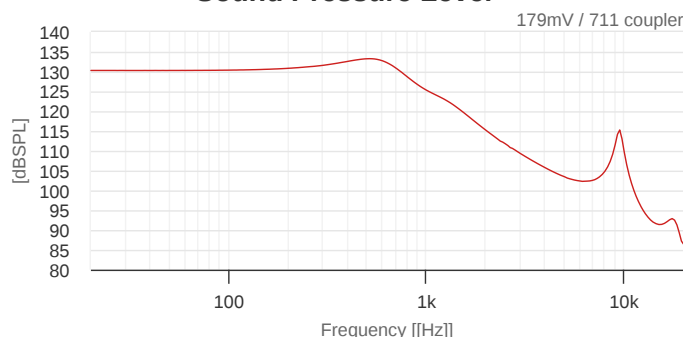

Total Harmonic Distortion

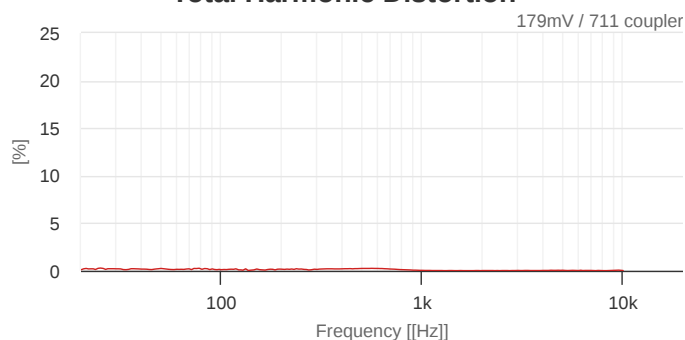

Impedance

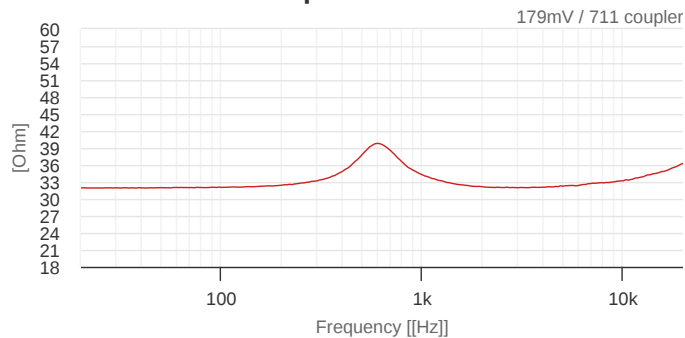

Pistonic series drivers

