



Connector Location A

Connector Location B

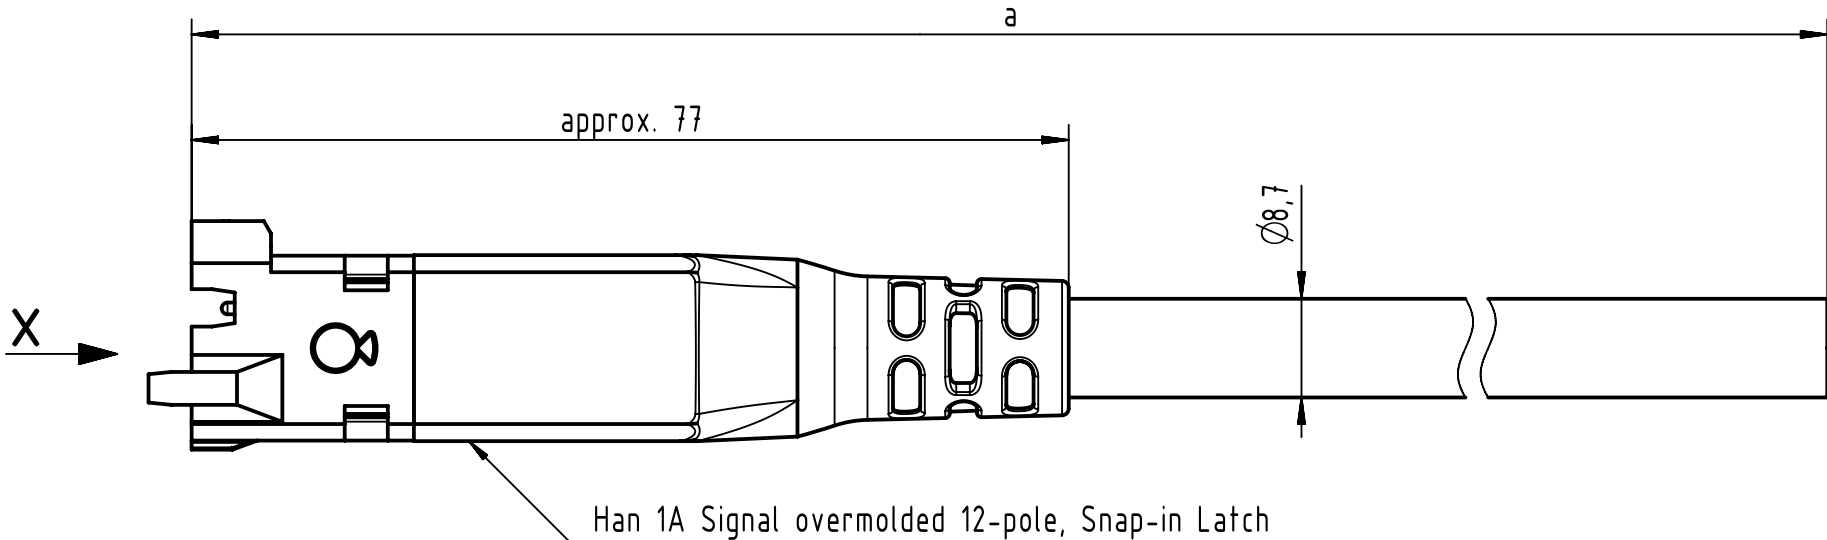


Han 1A Signal overmolded 12-pole, Snap-in Latch

X
male

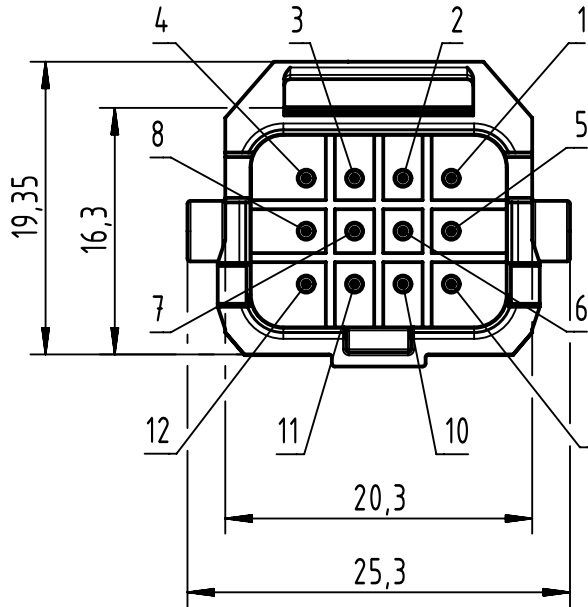

Loading Plan
acc. to DIN 47100

- 1 white
- 2 brown
- 3 green
- 4 yellow
- 5 grey
- 6 pink
- 7 blue
- 8 red
- 9 black
- 10 violet
- 11 grey-pink
- 12 red-blue

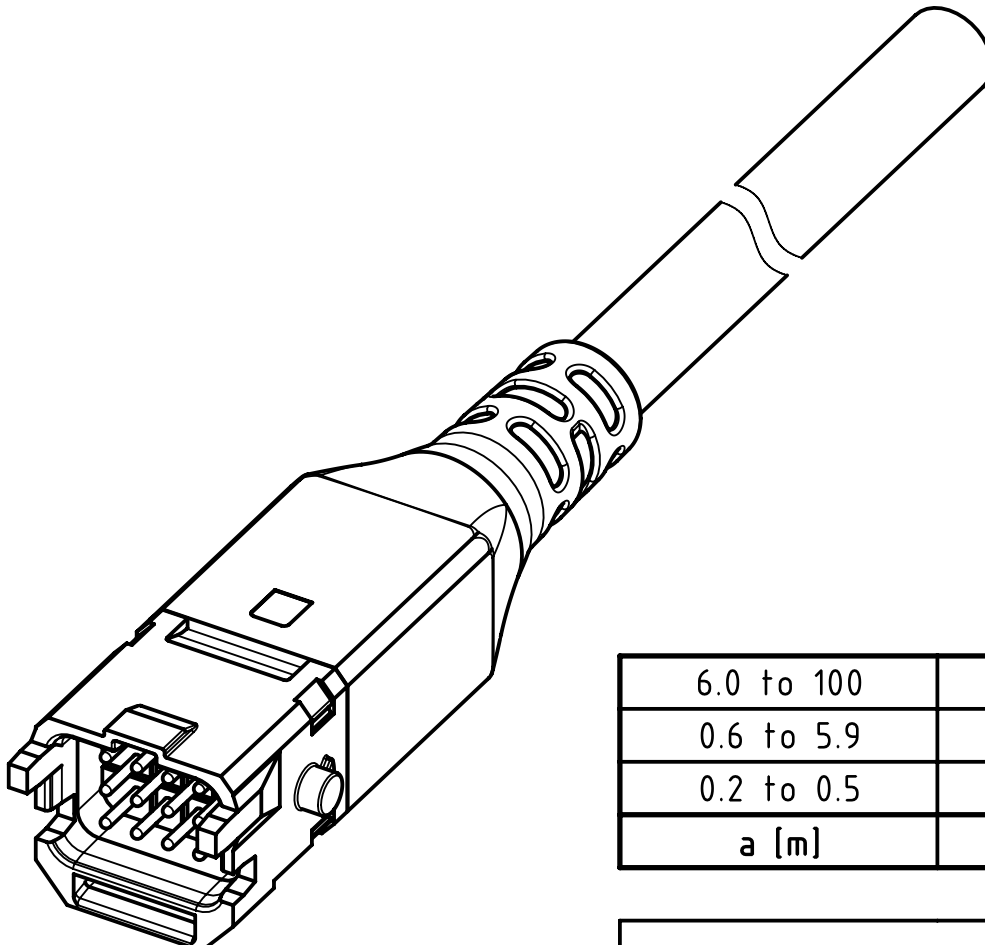


6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

NOTE:
* Gold plated contacts
* Protection level: IP66/67
Temperature range:
- Fixed installation: -30°C ... +80°C
- Dynamic installation: -5°C ... +80°C

Tronic (LiYY) 12x0.5qmm, PVC, grey	33401200703XXX
Type of cable	Part no.



All rights reserved
Department HCS - RO
HARTING Customised Solutions
D-32339 Espelkamp

Created by
STOCHECIC
Stocheci

Inspected by
402676
Gross

Standardisation
MUNTEANV
Muntean

Date
2023-04-25

State
Final Release

Title
Han 1A OM 12 Pole +latch m/- PVC

Type
TB

Number
33401200703XXX

Doc-Key / ECM-Nr.
101048317/UGD/000/A
500000242073

Rev.
A

Page
1/1