SMA Wrench

SMA Connectors
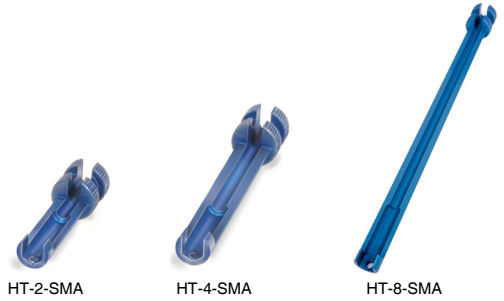
Mini-Circuits®

THE BIG DEAL

- Ability to remove SMA connectors without removing the adjacent cables
- Small portable tool, fits in pocket
- Connect or disconnect SMA connectors in tight spaces
- Use in combination with torque wrench or just with fingers
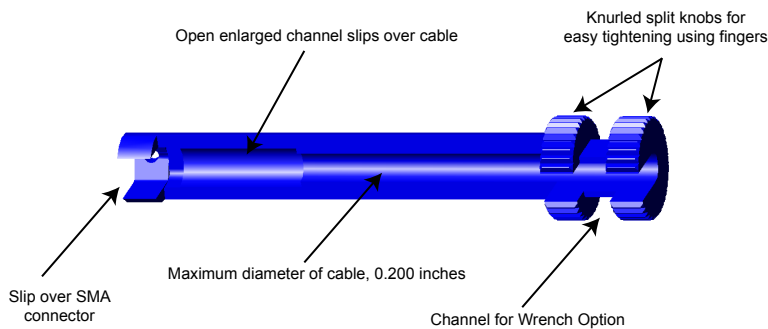- Protected by US Patent 9,027,446

HT-2-SMA   HT-4-SMA   HT-8-SMA

Generic photo used for illustration purposes only
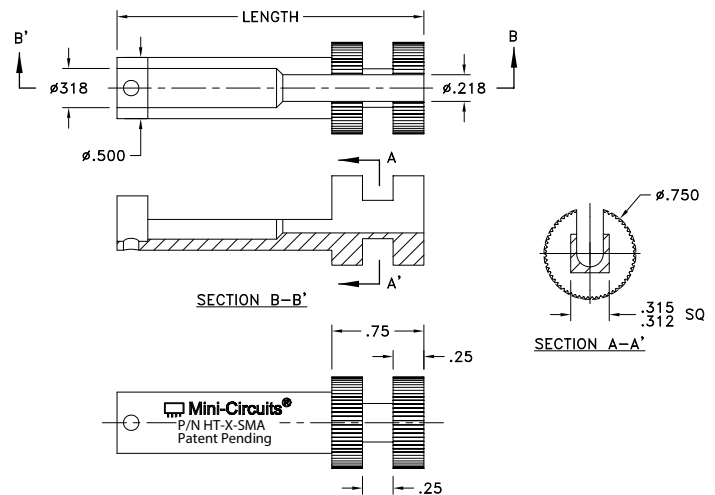
CASE STYLE: MY-1E

PRODUCT OVERVIEW

The HT-Series wrenches allow for convenient and easy connecting or disconnecting of SMA cable connectors in tight spaces, with either a wrench or simply finger grip. The use of HT-Series accommodates most SMA cable width diameters.

Open enlarged channel slips over cable

Knurled split knobs for easy tightening using fingers

Slip over SMA connector

Maximum diameter of cable, 0.200 inches

Channel for Wrench Option

OUTLINE DRAWING

LENGTH

ø318   ø.218

ø.500

SECTION B—B'

SECTION A—A'

ø.750

.315
.312 SQ

.75   .25

Mini-Circuits®
P/N HT-X-SMA
Patent Pending

.25

HOW TO USE THE WRENCH

1. The open box wrench head is slid onto the hex nut as shown in figure-1.
2. The knurled split knobs are rotated to tighten or un-tighten the SMA cable nut by use of fingers. Alternatively, an open end wrench or a torque wrench can be used as shown in figure-2.

Figure-1   Figure-2

CASE #	LENGTH	WT GRAMS
MY—1E—004	2.50 (63.50)	13.2
MY—1E—005	4.00 (101.60)	18.5
MY—1E—008	8.00 (203.20)	34.0

Mini-Circuits®