

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



High-current connector, nom. voltage: 1000 V, nominal current: 125 A, number of connections: 2, connection method: Bolt connection, Rated cross section: 35 mm², mounting type: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Comprehensive range of accessories for safe and user-friendly wiring of conductors up to 120 mm²
- Two different partition plates can be used for the range of single and double-bolt terminal blocks
- 2 and 3-pos. connection rails can be used for potential distribution
- Secure connection of up to 4 conductors with cable lugs according to DIN 46234, 46235, and 46237 in a small amount of space
- Spring washers are used to prevent hexagonal nuts from loosening
- The feed-through window provided in the partition plates can be easily removed for mounting the connection rails

Commercial data

Item number	3049547
Packing unit	25 pc
Minimum order quantity	25 pc
Sales key	BE42
Product key	BE4212
Catalog page	Page 395 (C-1-2019)
GTIN	4046356310291
Weight per piece (including packing)	77 g
Weight per piece (excluding packing)	74.027 g
Customs tariff number	85369010
Country of origin	IN

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Technical data

Product properties

Product type	Bolt connection terminal block
Product family	HV
Pitch	18 mm
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	4.06 W

Connection data

Number of connections per level	2
Nominal cross section	35 mm ²
Stripping length	The stripping length depends on the specification provided by the cable lug manufacturer.
Connection in acc. with standard	IEC 60947-7-1
Nominal current	125 A
Maximum load current	125 A (with 35 mm ² conductor cross section)
Nominal voltage	1000 V
Nominal cross section	35 mm ²

Cable lug connection DIN 46234:1980-03

Connection in acc. with standard	DIN 46234:1980-03
Cross section	2.5 mm ² ... 35 mm ²
Cross section range AWG	(converted acc. to IEC)
Hole diameter	6.5 mm
Width	15 mm
Bolt length	22.5 mm
Bolt diameter	6 mm
Screw thread	M6
Tightening torque	3 ... 6 Nm
Connection in acc. with standard	DIN 46235:1983-07
Cross section	6 mm ² ... 25 mm ²
Cross section range AWG	(converted acc. to IEC)
Hole diameter	6.4 mm
Width	14 mm
Bolt length	22.5 mm

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Bolt diameter	6 mm
Screw thread	M6
Tightening torque	3 ... 6 Nm
Connection in acc. with standard	DIN 46237:1970-07
Cross section	2.5 mm² ... 6 mm²
Cross section range AWG	(converted acc. to IEC)
Hole diameter	6.5 mm
Width	11 mm
Bolt length	22.5 mm
Bolt diameter	6 mm
Screw thread	M6
Tightening torque	3 ... 6 Nm

Dimensions

Width	16 mm
End cover width	2 mm
Height	64 mm
Depth	56.1 mm
Depth on NS 35/7,5	56.1 mm
Depth on NS 35/15	63.6 mm
Bolt length	17 mm
Pitch	18 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

Temperature-rise test

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
Short-time withstand current 35 mm ²	4.2 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	2.2 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	10 N
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5$ Hz to $f_2 = 150$ Hz
ASD level	0.964 (m/s ²) ² /Hz
Acceleration	5.72g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

HV M6/2 - High-current connector


3049547

<https://www.phoenixcontact.com/us/products/3049547>



Drawings

Application drawing

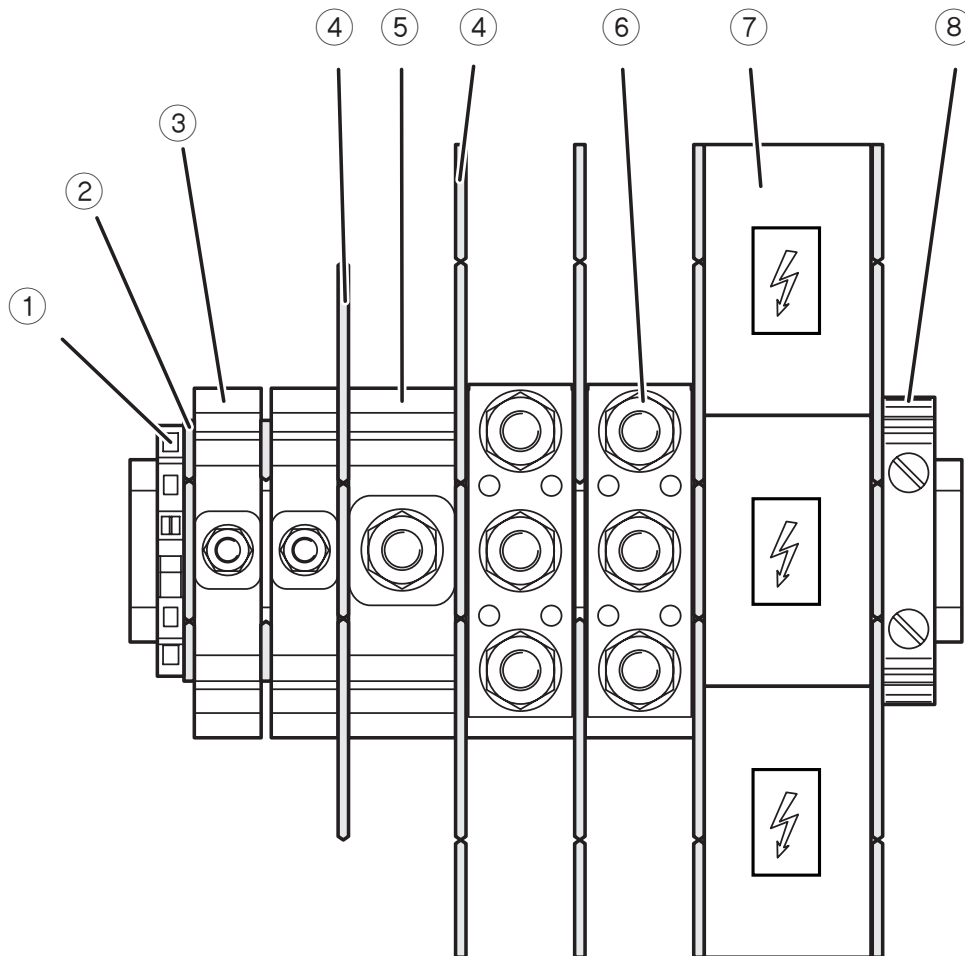

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Circuit diagram



HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3049547>



CSA
Approval ID: 13631

 cUL Recognized Approval ID: FILE E 60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group C				
	1000 V	125 A	-	-

 UL Recognized Approval ID: FILE E 60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group F				
	1000 V	125 A	-	-
Use group E				
	1000 V	125 A	-	-



EAC
Approval ID: RU C-DE.BL08.B.00540



CSA
Approval ID: 13631

cULus Recognized

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

ETIM

ETIM 9.0	EC000897
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

Accessories

i Note: Applying some accessories below might limit this product.

HV M6/1-VS 2 - Connection element

3049262

<https://www.phoenixcontact.com/us/products/3049262>



Connection element, depth: 4 mm, width: 15 mm, height: 32 mm, number of positions: 2, color: silver

i Max. current carrying capacity: 125 A

HV M6/1-VS 3 - Connection element

3049275

<https://www.phoenixcontact.com/us/products/3049275>



Connection element, depth: 4 mm, width: 15 mm, height: 50 mm, number of positions: 3, color: silver

i Max. current carrying capacity: 125 A

HV M6/2 - High-current connector

3049547

<https://www.phoenixcontact.com/us/products/3049547>



AGK PT 6X2,5/M6 - Pick-off terminal block

1346838

<https://www.phoenixcontact.com/us/products/1346838>



Pick-off terminal block, nom. voltage: 1000 V, nominal current: 24 A, number of connections: 7, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.34 mm² - 4 mm², Bolt connection, Line contact, mounting type: on base element, color: gray

HV M12/2-TP - Separating plate

3049709

<https://www.phoenixcontact.com/us/products/3049709>



Separating plate, width: 2 mm, height: 156 mm, color: gray

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

HV M6/1-AP - Cover profile

3049903

<https://www.phoenixcontact.com/us/products/3049903>

Cover profile, for single-bolt terminal block M6, depth: 6.5 mm, width: 16 mm, height: 70 mm, color: gray



AP-BTO 5,5/14 - Cover profile

3281151

<https://www.phoenixcontact.com/us/products/3281151>

Cover profile, material: PC, color: transparent



HV M6/2 - High-current connector

3049547

<https://www.phoenixcontact.com/us/products/3049547>



NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

HV M6/2 - High-current connector

3049547

<https://www.phoenixcontact.com/us/products/3049547>



NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

HV M6/2 - High-current connector

3049547

<https://www.phoenixcontact.com/us/products/3049547>



NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

HV M6/2 - High-current connector

3049547

<https://www.phoenixcontact.com/us/products/3049547>



NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



ZB 12:UNPRINTED - Zack marker strip

0812120

<https://www.phoenixcontact.com/us/products/0812120>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 12 x 10.5 mm, Number of individual labels: 5

HV M6/2 - High-current connector

3049547

<https://www.phoenixcontact.com/us/products/3049547>



ZB 12 CUS - Zack marker strip

0824942

<https://www.phoenixcontact.com/us/products/0824942>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

ZB 12,LGS:L1-N,PE - Zack marker strip

0812146

<https://www.phoenixcontact.com/us/products/0812146>



Zack marker strip, Strip, white, labeled, printed horizontally: L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 12.2 mm, lettering field size: 10.5 x 12.15 mm, Number of individual labels: 5

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

UC-TM 12 - Marker for terminal blocks

0819194

<https://www.phoenixcontact.com/us/products/0819194>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40

UC-TM 12 CUS - Marker for terminal blocks

0824613

<https://www.phoenixcontact.com/us/products/0824613>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 11.45 x 10.5 mm, Number of individual labels: 40

HV M6/2 - High-current connector



3049547

<https://www.phoenixcontact.com/us/products/3049547>

UCT-TM 12 - Marker for terminal blocks

0829144

<https://www.phoenixcontact.com/us/products/0829144>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30

UCT-TM 12 CUS - Marker for terminal blocks

0829630

<https://www.phoenixcontact.com/us/products/0829630>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 12 mm, lettering field size: 10.8 x 9.6 mm, Number of individual labels: 30

HV M6/2 - High-current connector

3049547

<https://www.phoenixcontact.com/us/products/3049547>



WS-4K - Warning label

1004584

<https://www.phoenixcontact.com/us/products/1004584>

Adhesive warning plate, self-adhesive, black print: lightning flash with mixed version - "Vorsicht Spannung - Attention Danger" size of label: 13 x 23.5 mm



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com