


# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, nom. voltage: 500 V, nominal current: 32 A, number of connections: 4, connection method: Screw/plug-in connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: gray

## Your advantages

- Plugs with different conductor exit directions (lateral or upwards) enable practical, efficient wiring. This results in a high degree of flexibility, which is required in various areas of application.
- Screw flanges for securely latching plugs

## Commercial data

Item number	3060296
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE01
Product key	BE1141
Catalog page	Page 329 (C-1-2019)
GTIN	4046356090421
Weight per piece (including packing)	16.47 g
Weight per piece (excluding packing)	16.19 g
Customs tariff number	85369010
Country of origin	PL

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Technical data

### Notes

General	The max. load current must not be exceeded by the total current of all connected conductors. Current and voltage are determined by the plug used.
---------	--

### General

Note	The max. load current must not be exceeded by the total current of all connected conductors.  With a free-hanging connection, an insulating foil has to be placed between the plug connection and electrically conductive surfaces.
------	---

### Product properties

Product type	Plug-in terminal block
Product family	UT
Number of connections	4
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W

### Connection data

Number of connections per level	4
Nominal cross section	4 mm <sup>2</sup>

### Level 1 below 1+2

Screw thread	M3
Tightening torque	0.6 ... 0.8 Nm
Stripping length	9 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section AWG	26 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	26 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>
2 conductors with same cross section, solid	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

2 conductors with same cross section, flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>
Nominal current	32 A (observe derating)
Maximum load current	32 A (with 6 mm <sup>2</sup> conductor cross section)
Nominal voltage	500 V
Nominal cross section	4 mm <sup>2</sup>

## Dimensions

Width	6.2 mm
End cover width	2.2 mm
Height	82.4 mm
Depth on NS 35/7,5	47.5 mm
Depth on NS 35/15	55 mm

## Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed
Short-time withstand current 4 mm <sup>2</sup>	0.48 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
Result	Test passed

## Mechanical properties

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Mechanical data

Open side panel	Yes
-----------------	-----

## Mechanical tests

### Attachment on the carrier

Test force setpoint	1 N
Result	Test passed

## Environmental and real-life conditions

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Service life test category 1, class B, body mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$
ASD level	$0.964 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	0.58g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C (max. operating temperature see derating curve)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

## Mounting

# UT 4-QUATTRO/ 2P - Feed-through terminal block




3060296

<https://www.phoenixcontact.com/us/products/3060296>


Mounting type	NS 35/7,5
	NS 35/15

## Drawings

Diagram

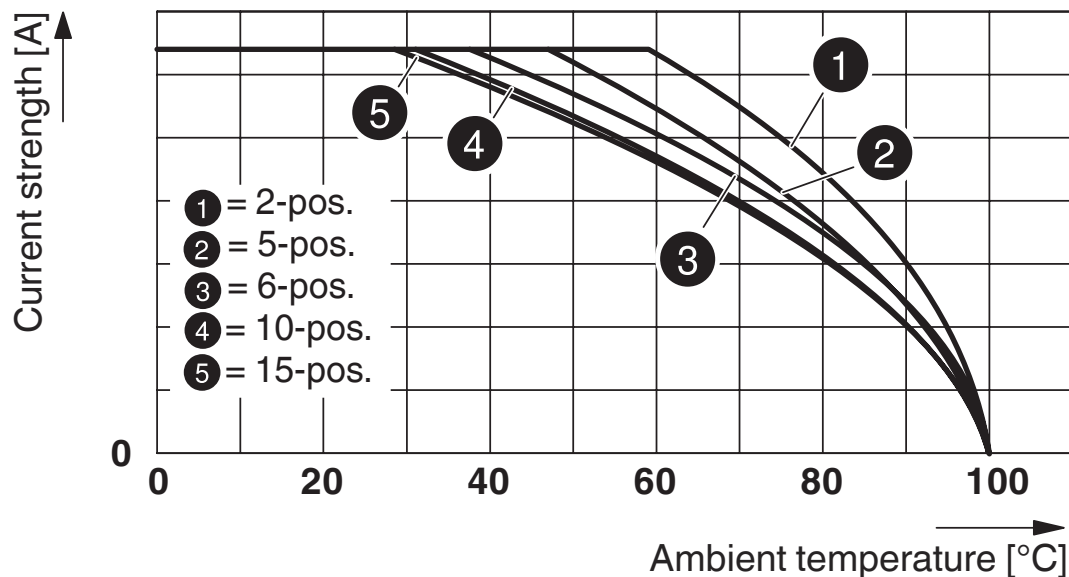

Circuit diagram

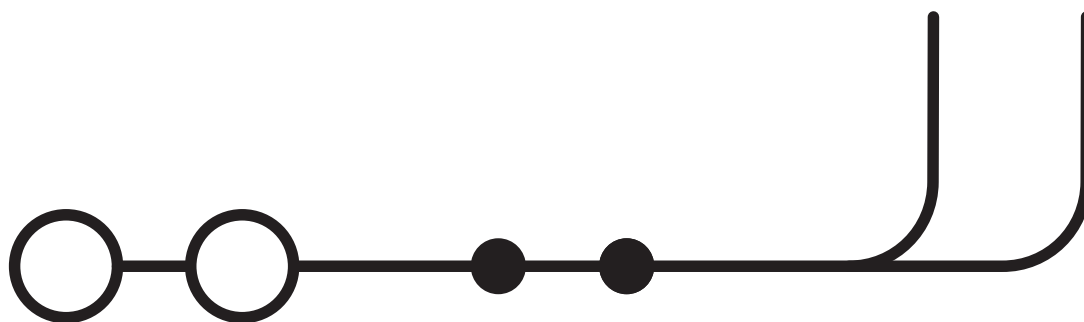

# UT 4-QUATTRO/ 2P - Feed-through terminal block





3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3060296>

 <b>CSA</b> Approval ID: 13631				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Use group B	300 V	30 A	26 - 10	-
Use group C				
Use group D	150 V	30 A	26 - 10	-
	300 V	10 A	26 - 10	-

 <b>EAC</b> Approval ID: RU C-DE.BL08.B.00534	
---	--

 <b>cULus Recognized</b> Approval ID: E60425	
--	--

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Classifications

### ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250117

### ETIM

ETIM 9.0	EC000897
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	2698fd55-e128-49fc-814a-0edb9ff05922

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/us/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

**i** Max. current carrying capacity: 32 A

### FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/us/products/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

**i** Max. current carrying capacity: 32 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/us/products/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

---


## FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/us/products/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/us/products/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 32 A

---

## FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/us/products/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/us/products/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 32 A

---


## FBS 50-6 - Plug-in bridge

3032224

<https://www.phoenixcontact.com/us/products/3032224>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: red

 Max. current carrying capacity: 32 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>


## FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/us/products/3033715>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/us/products/3001594>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 24 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/us/products/3001595>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/us/products/3001596>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 24 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/us/products/3033716>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 24 A

---

## FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/us/products/3033812>



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/us/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 32 A

---


## FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/us/products/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 32 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/us/products/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/us/products/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 32 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/us/products/3032198>

Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue



 Max. current carrying capacity: 32 A


---

## FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/us/products/3032208>

Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue



 Max. current carrying capacity: 32 A

---

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/us/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 32 A

---

## RB ST 10-(2,5/4) - Reducing bridge

3030873

<https://www.phoenixcontact.com/us/products/3030873>



Reducing bridge, pitch: 10 mm, number of positions: 2, length: 36 mm, color: red

 Max. current carrying capacity: 35 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>


## RB UT 10-(2,5/4) - Reducing bridge

3047060

<https://www.phoenixcontact.com/us/products/3047060>



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 29 mm, color: red

 Max. current carrying capacity: 40 A

---

## RB UT 35-(2,5/4) - Reducing bridge

3047277

<https://www.phoenixcontact.com/us/products/3047277>



Reducing bridge, pitch: 11 mm, number of positions: 2, color: red

 Max. current carrying capacity: 40 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>


## RB UT 16-(2,5/4) - Reducing bridge

3047073

<https://www.phoenixcontact.com/us/products/3047073>



Reducing bridge, pitch: 11 mm, number of positions: 2, length: 31 mm, color: red

 Max. current carrying capacity: 40 A

---

## RB UT 6-(2,5/4) - Reducing bridge

3047251

<https://www.phoenixcontact.com/us/products/3047251>



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red

 Max. current carrying capacity: 40 A

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## D-UT 4-QUATTRO/ 2P - End cover

3045648

<https://www.phoenixcontact.com/us/products/3045648>

End cover, depth: 39.8 mm, width: 2.2 mm, height: 81.4 mm, color: gray



---

## ATP-UT-QUATTRO - Partition plate

3047196

<https://www.phoenixcontact.com/us/products/3047196>

Partition plate, depth: 52.5 mm, width: 2.2 mm, height: 69.7 mm, color: gray



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## PC - Coding star

3040588

<https://www.phoenixcontact.com/us/products/3040588>

Coding star, 4-section, depth: 6 mm, width: 3 mm, height: 3 mm, color: red



---

## DS-UT 2,5/4 - Cover segment

3047109

<https://www.phoenixcontact.com/us/products/3047109>

Cover segment, color: gray





# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## CP 4/2 - Connector housing

1066559

<https://www.phoenixcontact.com/us/products/1066559>



Connector housing, nom. voltage: 800 V, nominal current: 10 A, connection method: Crimp connection, pitch: 6.2 mm, depth: 32.4 mm, width: 11.3 mm, height: 14.95 mm, number of positions: 2, color: gray, mounting type: Plug-in mounting

---

## CP 4/3 - Connector housing

1066560

<https://www.phoenixcontact.com/us/products/1066560>



Connector housing, nom. voltage: 800 V, nominal current: 10 A, connection method: Crimp connection, pitch: 6.2 mm, depth: 32.4 mm, width: 17.5 mm, height: 14.95 mm, number of positions: 3, color: gray, mounting type: Plug-in mounting

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## CP 4/4 - Connector housing

1066561

<https://www.phoenixcontact.com/us/products/1066561>



Connector housing, nom. voltage: 800 V, nominal current: 10 A, connection method: Crimp connection, pitch: 6.2 mm, depth: 32.4 mm, width: 23.5 mm, height: 14.95 mm, number of positions: 4, color: gray, mounting type: Plug-in mounting

---

## CP 4/5 - Connector housing

1066562

<https://www.phoenixcontact.com/us/products/1066562>



Connector housing, nom. voltage: 800 V, nominal current: 10 A, connection method: Crimp connection, pitch: 6.2 mm, depth: 32.4 mm, width: 29.8 mm, height: 14.95 mm, number of positions: 5, color: gray, mounting type: Plug-in mounting

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## CP 4/6 - Connector housing

1066563

<https://www.phoenixcontact.com/us/products/1066563>



Connector housing, nom. voltage: 800 V, nominal current: 10 A, connection method: Crimp connection, pitch: 6.2 mm, depth: 32.4 mm, width: 35.9 mm, height: 14.95 mm, number of positions: 6, color: gray, mounting type: Plug-in mounting

---

## CP 4/8 - Connector housing

1066564

<https://www.phoenixcontact.com/us/products/1066564>



Connector housing, nom. voltage: 800 V, nominal current: 10 A, connection method: Crimp connection, pitch: 6.2 mm, depth: 32.4 mm, width: 48.2 mm, height: 14.95 mm, number of positions: 8, color: gray, mounting type: Plug-in mounting

# UT 4-QUATTRO/ 2P - Feed-through terminal block




3060296

<https://www.phoenixcontact.com/us/products/3060296>

## CP 4/10 - Connector housing

1066565

<https://www.phoenixcontact.com/us/products/1066565>



Connector housing, nom. voltage: 800 V, nominal current: 10 A, connection method: Crimp connection, pitch: 6.2 mm, depth: 32.4 mm, width: 60.5 mm, height: 14.95 mm, number of positions: 10, color: gray, mounting type: Plug-in mounting

---

## LPS-6/E - Service connector

3270540

<https://www.phoenixcontact.com/us/products/3270540>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## LPS-6 - Service connector

3270541

<https://www.phoenixcontact.com/us/products/3270541>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: red

---

## LPO 4/E - Pick-off plug

3270519

<https://www.phoenixcontact.com/us/products/3270519>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

## UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## LPO 4 - Pick-off plug

3270522

<https://www.phoenixcontact.com/us/products/3270522>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 4 mm<sup>2</sup>, color: gray

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



### NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

### NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



### NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

---

### NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



### ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/us/products/1051003>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

### ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/us/products/0824992>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/us/products/1051016>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/us/products/1051029>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6. 15 x 10.5 mm, Number of individual labels: 10

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/us/products/1051032>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/us/products/1051414>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/us/products/1051430>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

---

## UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/us/products/0818085>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/us/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

---

## UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/us/products/0828736>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/us/products/0829602>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

## MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



---

## MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>




## MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



---

## MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



---

## MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray





# UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



---

## PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/us/products/3035975>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/us/products/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/us/products/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/us/products/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/us/products/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/us/products/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/us/products/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/us/products/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/us/products/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/us/products/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

---

## PS-6 - Test plug

3030996

<https://www.phoenixcontact.com/us/products/3030996>



Test plug, Modular test plug, number of positions: 1, color: red

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## PS-6/2,3MM RD - Test plug

3038736

<https://www.phoenixcontact.com/us/products/3038736>

Test plug, number of positions: 1, color: red



---

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>

Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray



## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>



End clamp, width: 9.5 mm, color: gray



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## PAI-4-N GY - Test adapter

3032871

<https://www.phoenixcontact.com/us/products/3032871>



4 mm test adapter, for terminal blocks with 5.2 mm, 6.2 mm and 8.2 mm pitch

---

## UP 4/ 1 - Plug

3060115

<https://www.phoenixcontact.com/us/products/3060115>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 2 - Plug

3060128

<https://www.phoenixcontact.com/us/products/3060128>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 2, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/ 3 - Plug

3060131

<https://www.phoenixcontact.com/us/products/3060131>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 3, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 4 - Plug

3060144

<https://www.phoenixcontact.com/us/products/3060144>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 4, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/ 5 - Plug

3060157

<https://www.phoenixcontact.com/us/products/3060157>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 5, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 6 - Plug

3060160

<https://www.phoenixcontact.com/us/products/3060160>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 6, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/ 7 - Plug

3060173

<https://www.phoenixcontact.com/us/products/3060173>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 7, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 8 - Plug

3060186

<https://www.phoenixcontact.com/us/products/3060186>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 8, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/ 9 - Plug

3060199

<https://www.phoenixcontact.com/us/products/3060199>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 9, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/10 - Plug

3060209

<https://www.phoenixcontact.com/us/products/3060209>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 10, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/11 - Plug

3060212

<https://www.phoenixcontact.com/us/products/3060212>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 11, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/12 - Plug

3060225

<https://www.phoenixcontact.com/us/products/3060225>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 12, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/13 - Plug

3060238

<https://www.phoenixcontact.com/us/products/3060238>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 13, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/14 - Plug

3060241

<https://www.phoenixcontact.com/us/products/3060241>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 14, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/15 - Plug

3060254

<https://www.phoenixcontact.com/us/products/3060254>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 15, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 1-L - Plug

3060021

<https://www.phoenixcontact.com/us/products/3060021>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/ 1-L BU - Plug

3060034

<https://www.phoenixcontact.com/us/products/3060034>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 1-L GNYE - Plug

3060047

<https://www.phoenixcontact.com/us/products/3060047>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

---

## UP 4/ 1-M - Plug

3060050

<https://www.phoenixcontact.com/us/products/3060050>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 1-M BU - Plug

3060063

<https://www.phoenixcontact.com/us/products/3060063>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

---

## UP 4/ 1-M GNYE - Plug

3060076

<https://www.phoenixcontact.com/us/products/3060076>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 1-R - Plug

3060089

<https://www.phoenixcontact.com/us/products/3060089>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UP 4/ 1-R BU - Plug

3060092

<https://www.phoenixcontact.com/us/products/3060092>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UP 4/ 1-R GNYE - Plug

3060102

<https://www.phoenixcontact.com/us/products/3060102>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

---

## UPBV 4/ 1 - Plug

3045800

<https://www.phoenixcontact.com/us/products/3045800>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 2 - Plug

3045813

<https://www.phoenixcontact.com/us/products/3045813>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 2, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/ 3 - Plug

3045826

<https://www.phoenixcontact.com/us/products/3045826>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 3, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 4 - Plug

3045839

<https://www.phoenixcontact.com/us/products/3045839>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 4, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/ 5 - Plug

3045842

<https://www.phoenixcontact.com/us/products/3045842>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 5, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 6 - Plug

3045855

<https://www.phoenixcontact.com/us/products/3045855>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 6, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/ 7 - Plug

3045868

<https://www.phoenixcontact.com/us/products/3045868>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 7, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 8 - Plug

3045871

<https://www.phoenixcontact.com/us/products/3045871>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 8, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/ 9 - Plug

3045884

<https://www.phoenixcontact.com/us/products/3045884>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 9, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/10 - Plug

3045897

<https://www.phoenixcontact.com/us/products/3045897>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 10, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/11 - Plug

3045907

<https://www.phoenixcontact.com/us/products/3045907>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 11, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/12 - Plug

3045910

<https://www.phoenixcontact.com/us/products/3045910>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 12, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/13 - Plug

3045923

<https://www.phoenixcontact.com/us/products/3045923>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 13, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/14 - Plug

3045936

<https://www.phoenixcontact.com/us/products/3045936>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 14, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/15 - Plug

3045949

<https://www.phoenixcontact.com/us/products/3045949>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 15, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 1-L - Plug

3045716

<https://www.phoenixcontact.com/us/products/3045716>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/ 1-L BU - Plug

3045729

<https://www.phoenixcontact.com/us/products/3045729>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 1-L GNYE - Plug

3045732

<https://www.phoenixcontact.com/us/products/3045732>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

---

## UPBV 4/ 1-M - Plug

3045745

<https://www.phoenixcontact.com/us/products/3045745>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 1-M BU - Plug

3045758

<https://www.phoenixcontact.com/us/products/3045758>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue

---

## UPBV 4/ 1-M GNYE - Plug

3045761

<https://www.phoenixcontact.com/us/products/3045761>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 1-R - Plug

3045774

<https://www.phoenixcontact.com/us/products/3045774>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: gray

---

## UPBV 4/ 1-R BU - Plug

3045787

<https://www.phoenixcontact.com/us/products/3045787>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: blue



# UT 4-QUATTRO/ 2P - Feed-through terminal block



3060296

<https://www.phoenixcontact.com/us/products/3060296>

## UPBV 4/ 1-R GNYE - Plug

3045790

<https://www.phoenixcontact.com/us/products/3045790>



Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, color: green-yellow

---

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

## UT 4-QUATTRO/ 2P - Feed-through terminal block

3060296

<https://www.phoenixcontact.com/us/products/3060296>



## X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

---

## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)