
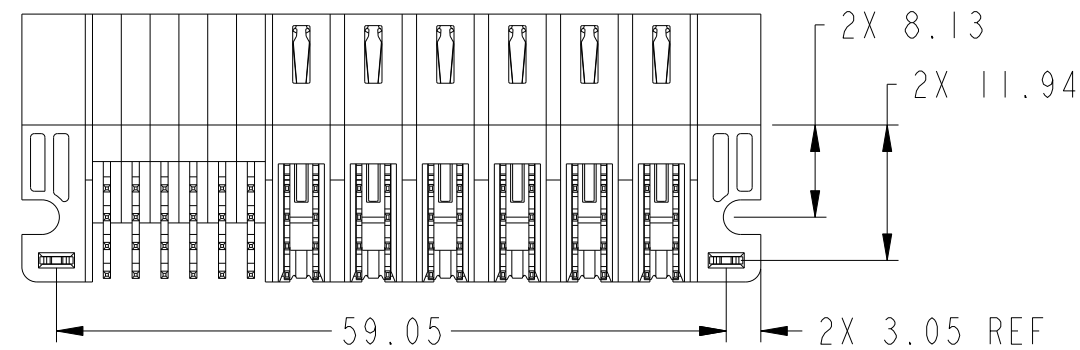
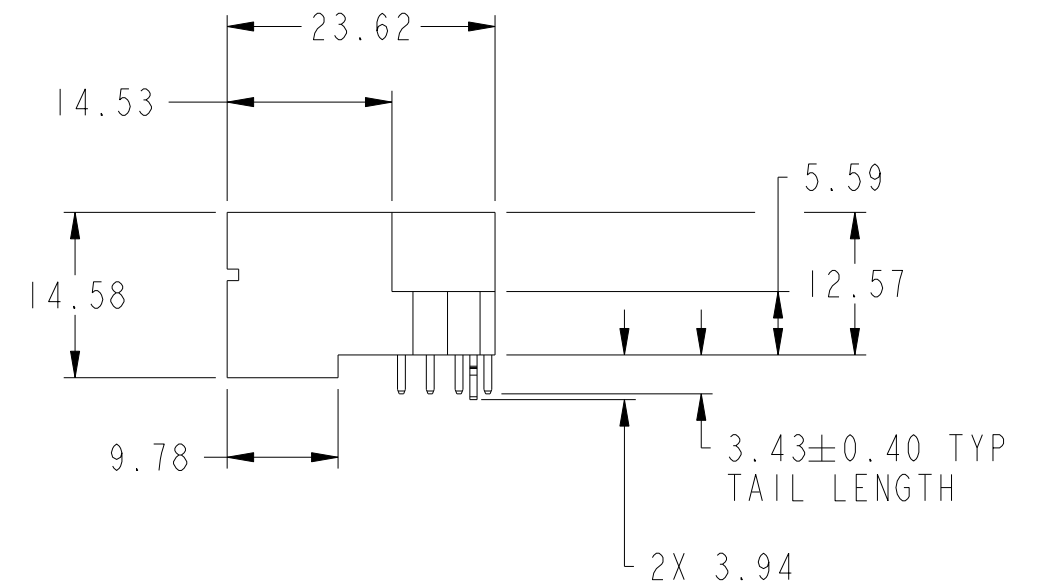
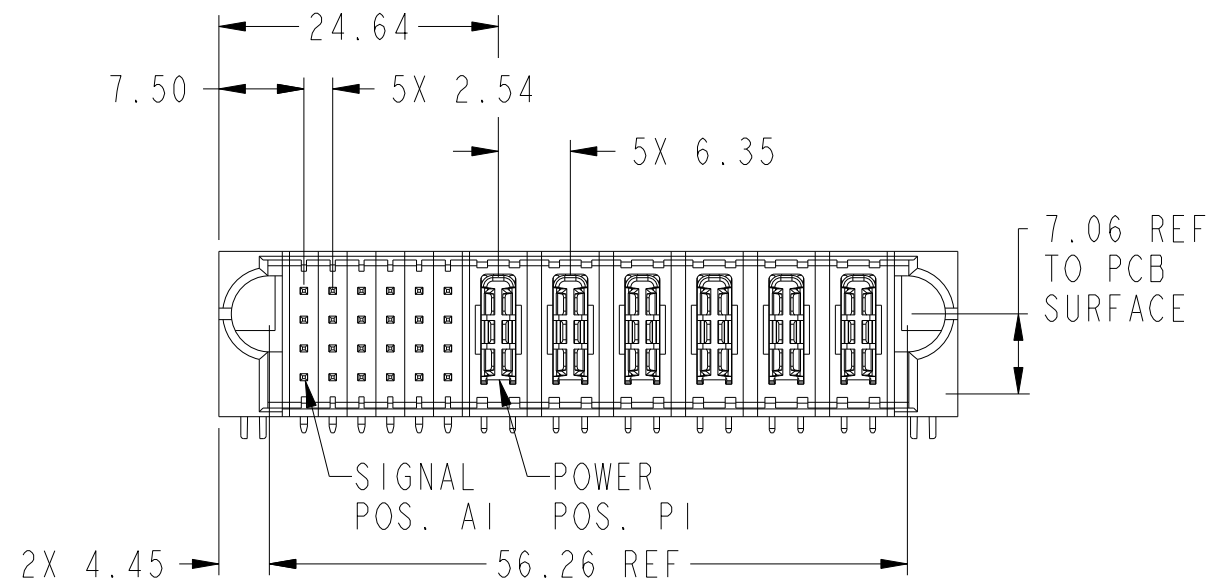
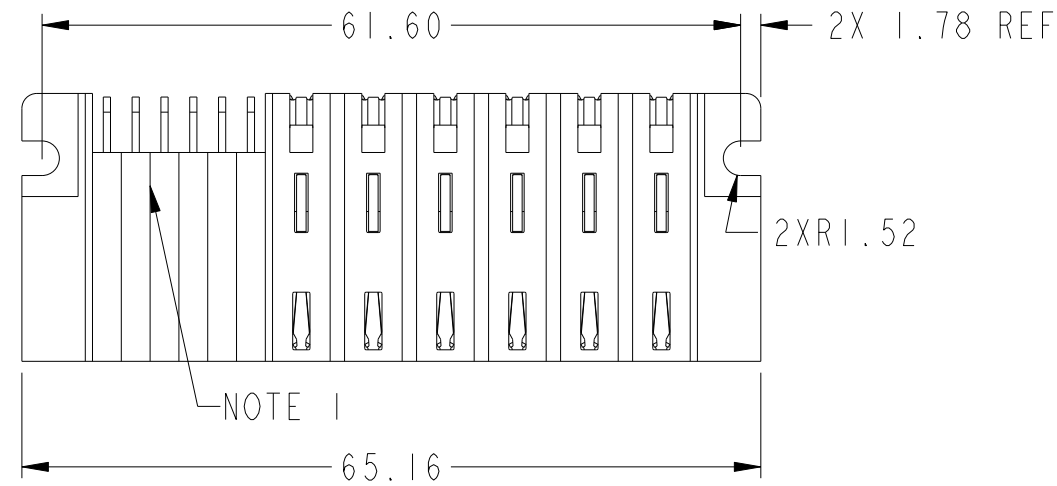




PRODUCT NUMBER

SEE SHEET 2



spec ref				dr	Sunny2 Liu	2017/08/10	projection 	MM 	size	A3	scale	3:2	
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/08/18			ecn no				-
				chr	Kaka Zhang	2017/08/18			rel level				Released
				appr	Pei-Ming Zheng	2017/08/18			product family				PwrBlade+
surface ISO 1302	linear	0.X	±0.5	Amphenol FCI	title 24S + 6HP RA STB PLUG				dwg no 10106124-6006010	rev A			
		0.XX	±0.25										
		0.XXX	±0.10										
	angular	0°	±2°	cat. no.	Product - Customer Drw				sheet 1 of 3				

PRODUCT NO.	ROWS		SIGNAL						HIGH POWER						
		E1	1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	E2
10106124-6006010LF	D C B A		U	U	U	U	U	U	H1	H1	H1	H1	H1	H1	
			T	T	T	T	T	T							
			S	S	S	S	S	S							
			R	R	R	R	R	R							
			U	U	U	U	U	U	U	U	U	U	U	U	


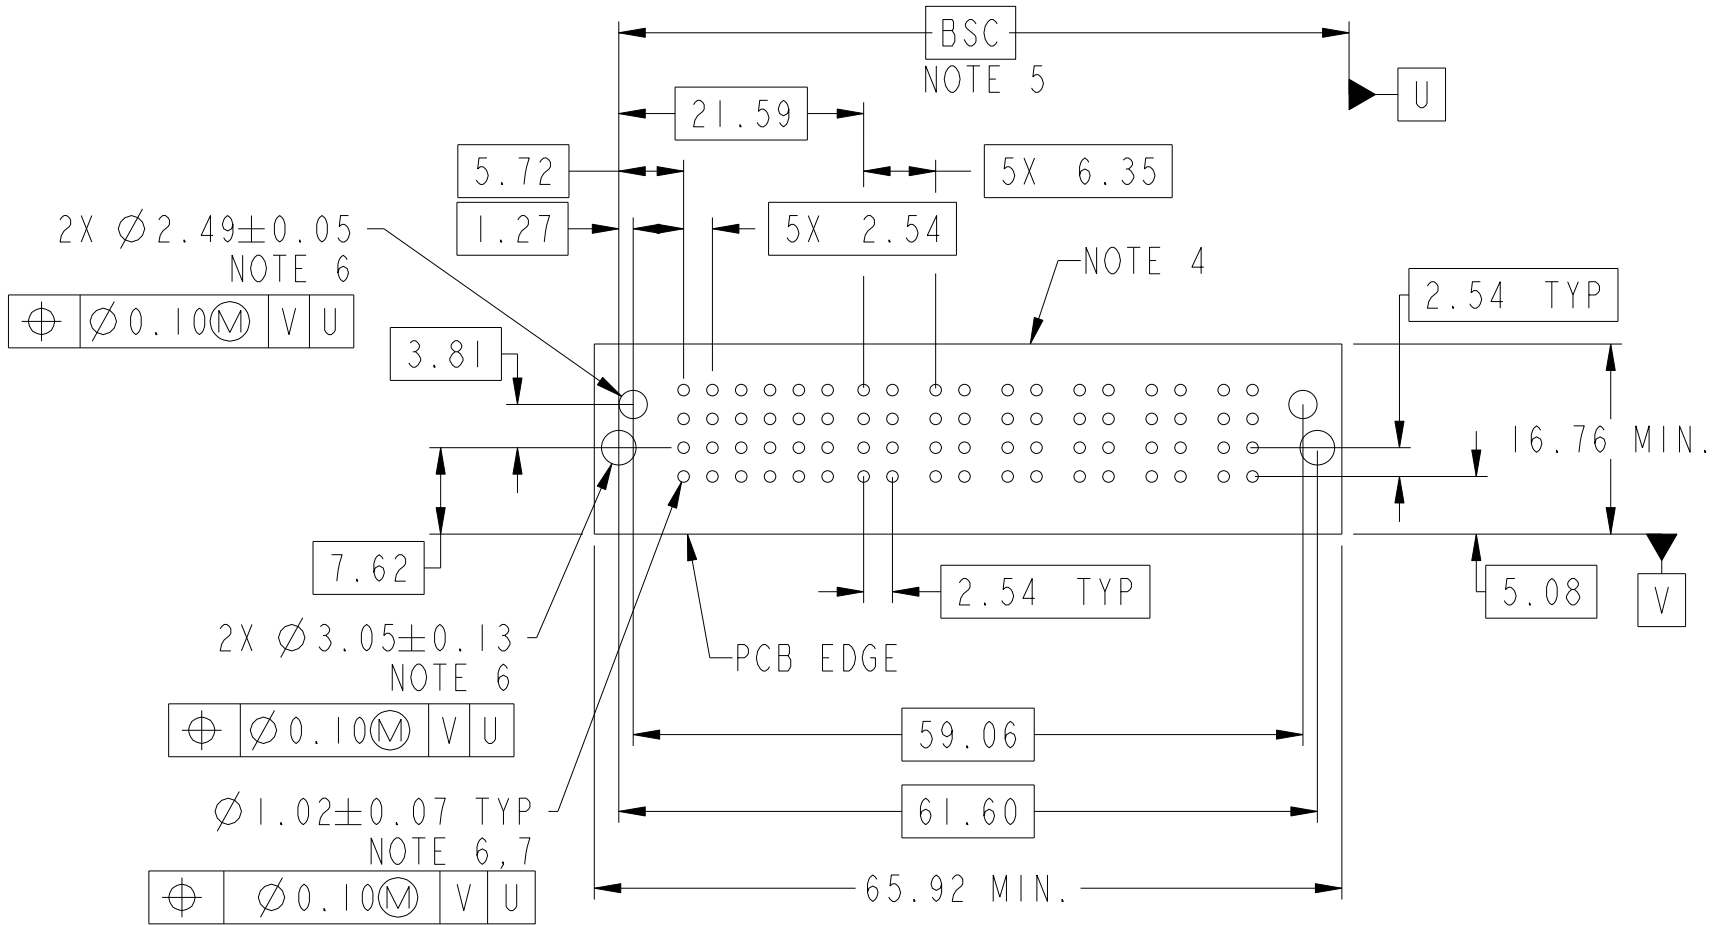


CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

spec ref				dr	Sunny2 Liu	2017/08/10	projection	MM	size	A3	scale	3:2		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/08/18			ecn no -					
				chr	Kaka Zhang	2017/08/18								
				ISO 406					appr	Pei-Ming Zheng	2017/08/18	product family PwrBlade+		
ISO 1101								rel level Released						
surface ISO 1302	linear	0.X	±0.5	Amphenol FCi	title	24S + 6HP				dwg no	10106124-6006010		rev	A
		0.XX	±0.25											
		0.XXX	±0.10											
	angular	0°	±2°											

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr	Sunny2 Liu	2017/08/10	projection 	MM 	size	A3	scale	3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/08/18			ecn no -			
ISO 406 ISO 1101				chr	Kaka Zhang	2017/08/18			rel level Released			
				appr	Pei-Ming Zheng	2017/08/18	product family PwrBlade+					
surface  ISO 1302	linear	0.X	±0.5	Amphenol FCi	title	24S + 6HP RA STB PLUG			dwg no	10106124-6006010		rev A
		0.XX	±0.25									
		0.XXX	±0.10									
angular		0°	±2°			cat. no.	Product - Customer Drw			sheet 3 of 3		