
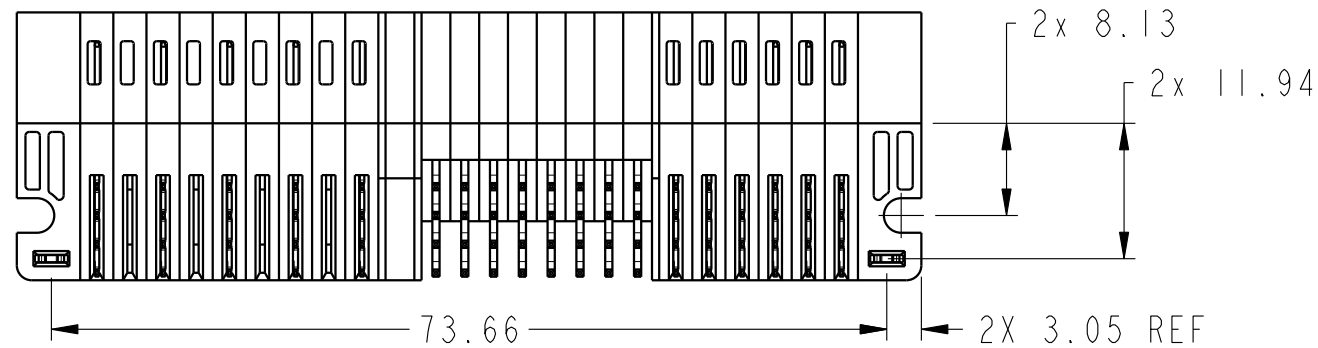
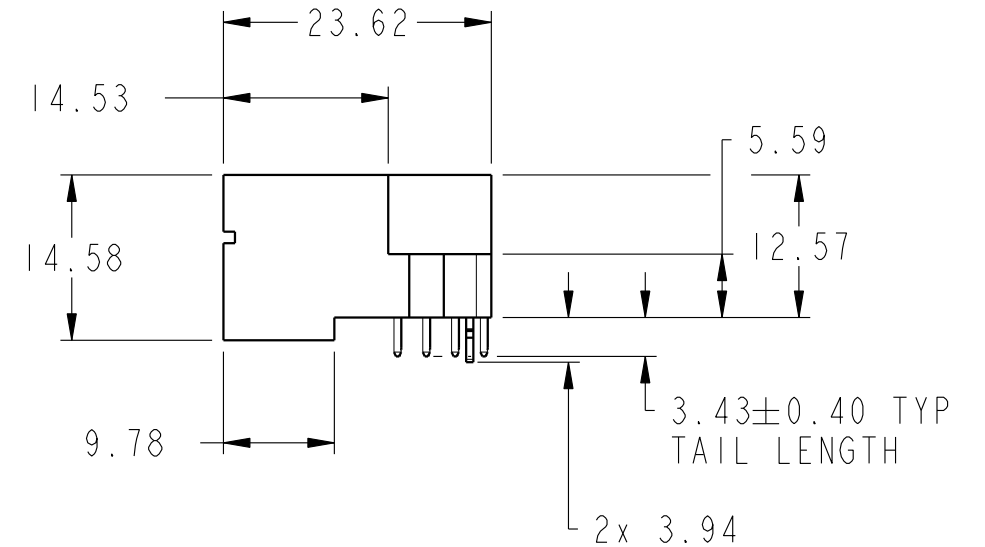
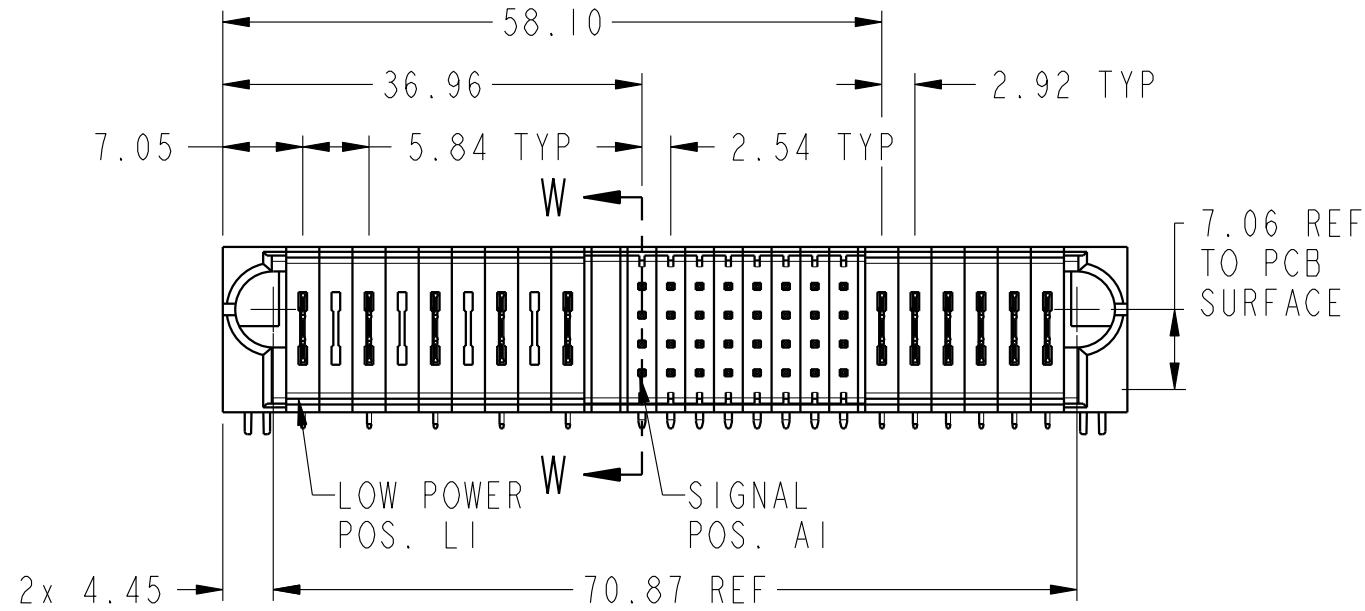
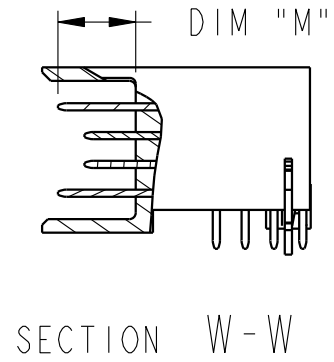
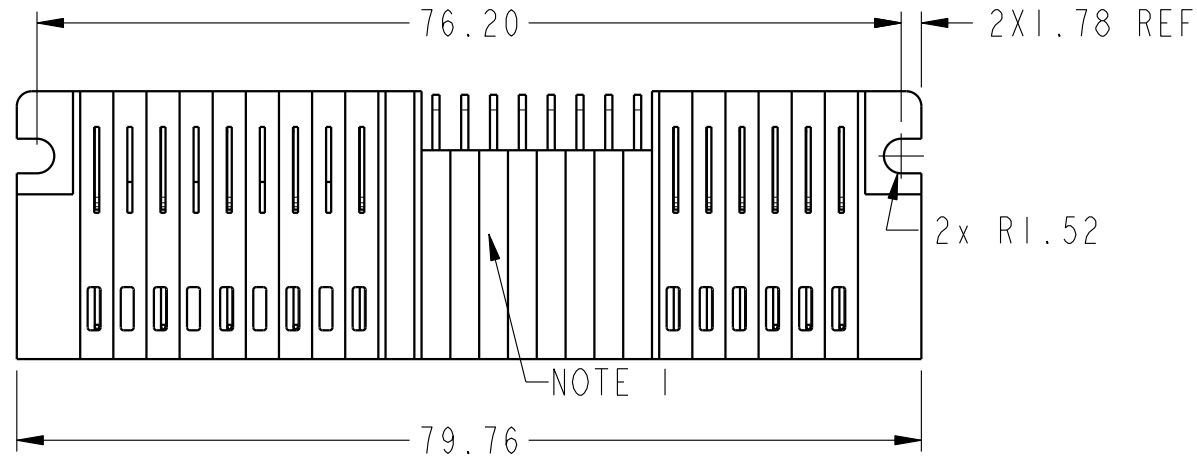



PRODUCT NUMBER

SEE SHEET 2



spec ref				dr	Rainbow Zhan	2017/06/01	projection 	MM 	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2019/06/10			ecn no	ELX-DG-33863-1		
				chr	-	-						
				appr	Zheng, Pei-Min	2019/06/11						
surface ISO 1302	linear	0.X	±0.5	Amphenol FCi	title 9LP + 32S + 6LP RA STB PLUG				dwg no 10106262-0F08001	rev D		
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°	cat. no.	Product - Customer Drw				sheet 1 of 3			

PRODUCT NO.	ROWS	LOW POWER									SIGNAL								LOW POWER											
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	1	2	3	4	5	6	7	8	P10	P11	P12	P13	P14	P15	E2				
10106262-0F08001LF	D C B A		LK	X	LK	X	LK	X	LK	X	LJ	U	U	U	HS	U	U	HS	U	L	J	L	J	L	J	L	K	L	K	
												GS	T	T	T	T	T	T	T	L	J	L	J	L	J	L	K	L	K	
												FS	S	S	S	S	S	S	S	L	J	L	J	L	J	L	K	L	K	
												R	R	R	R	R	R	R	R	L	J	L	J	L	J	L	K	L	K	

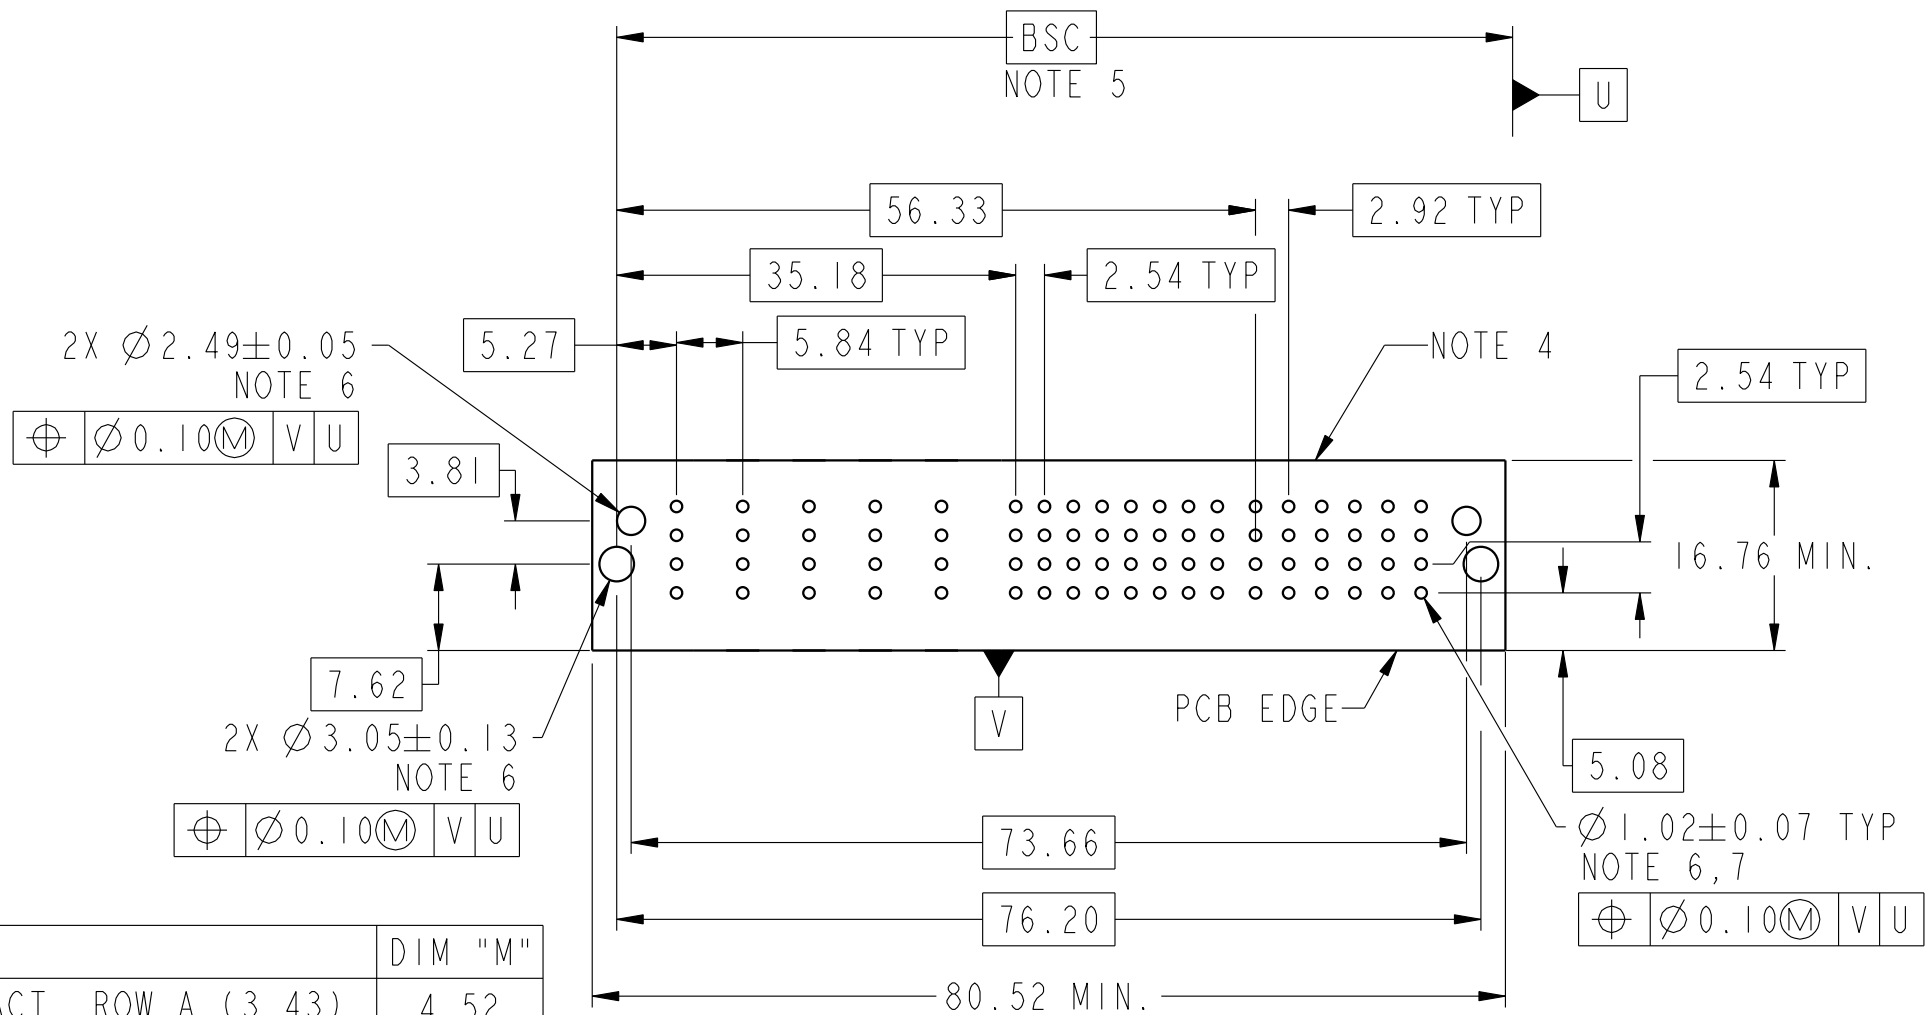

CODE	DESCRIPTION	DIM "M"
ES	MLBF2 SIGNAL CONTACT, ROW A (3.43)	4.52
FS	MLBF2 SIGNAL CONTACT, ROW B (3.43)	4.52
GS	MLBF2 SIGNAL CONTACT, ROW C (3.43)	4.52
HA	METAL HOLD DOWN	NA
HS	MLBF2 SIGNAL CONTACT, ROW D (3.43)	4.52
LJ	MFBL LOW POWER CONTACT (3.43)	NA
LK	STD LOW POWER CONTACT (3.43)	NA
R	STD SIGNAL CONTACT, ROW A (3.43)	6.86
RL	MFBL SIGNAL CONTACT, ROW A (3.43)	7.82
S	STD SIGNAL CONTACT, ROW B (3.43)	6.86
SL	MFBL SIGNAL CONTACT, ROW B (3.43)	7.82
T	STD SIGNAL CONTACT, ROW C (3.43)	6.86
U	STD SIGNAL CONTACT, ROW D (3.43)	6.86
X	OMITTED	NA

spec ref				dr	Rainbow Zhan	2017/06/01	projection	MM	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2019/06/10			ecn no ELX-DG-33863-1			
				chr	-	-						
				appr	Zheng, Pei-Min	2019/06/11			product family PwrBlade+			
surface ISO 1302	linear	0.X	±0.5	Amphenol FCi	title 9LP + 32S + 6LP				dwg no 10106262-0F08001		rev D	
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°		cat. no.		Product - Customer Drw					sheet 2 of 3

NOTES:

1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.

2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.

3) PLATING SPECIFICATION : 10116351

4) DENOTES CONNECTOR KEEP OUT ZONE.

5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.


6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.

7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.

8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.

9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.

10)PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr	Rainbow Zhan	2017/06/01	projection 	MM 	size	A3	scale	3:2		
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2019/06/10			ecn no				ELX-DG-33863-1	
ISO 406				chr	-	-								
ISO 1101				appr	Zheng, Pei-Min	2019/06/11			product family				PwrBlade+	rel level
surface  ISO 1302	linear	0.X	±0.5	Amphenol FCI	title				9LP + 32S + 6LP	dwg no	10106262-0F08001		rev	D
		0.XX	±0.25											
		0.XXX	±0.10											
		angular	0°	±2°		cat. no.				Product - Customer Drw				sheet 3 of 3