
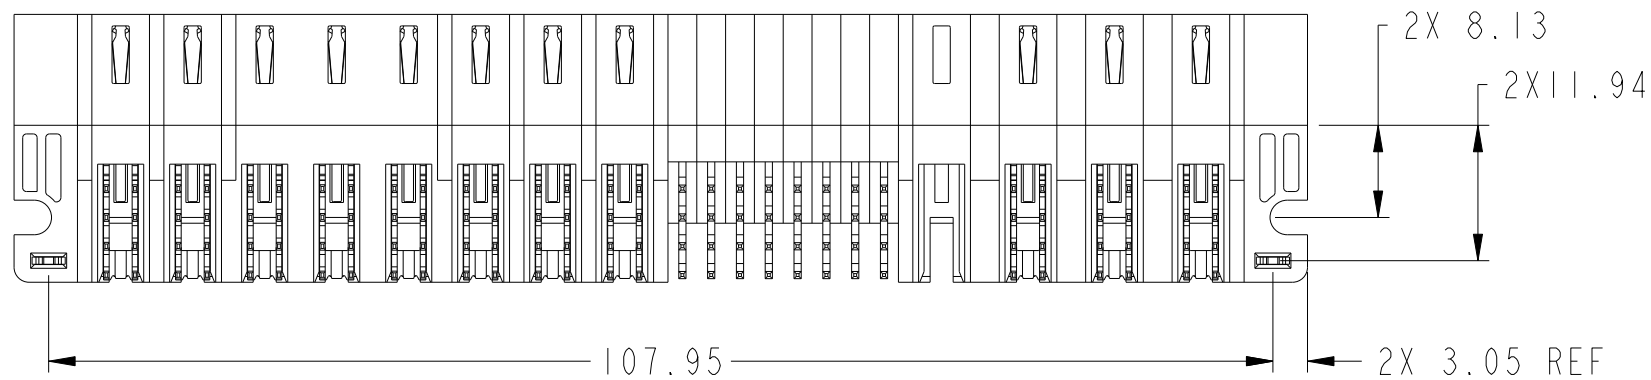
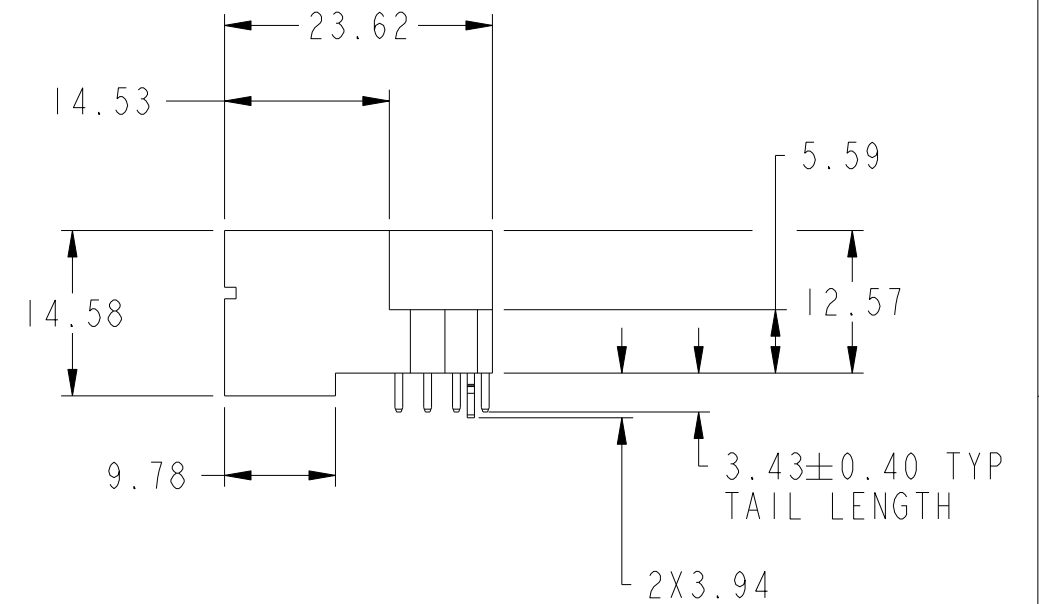
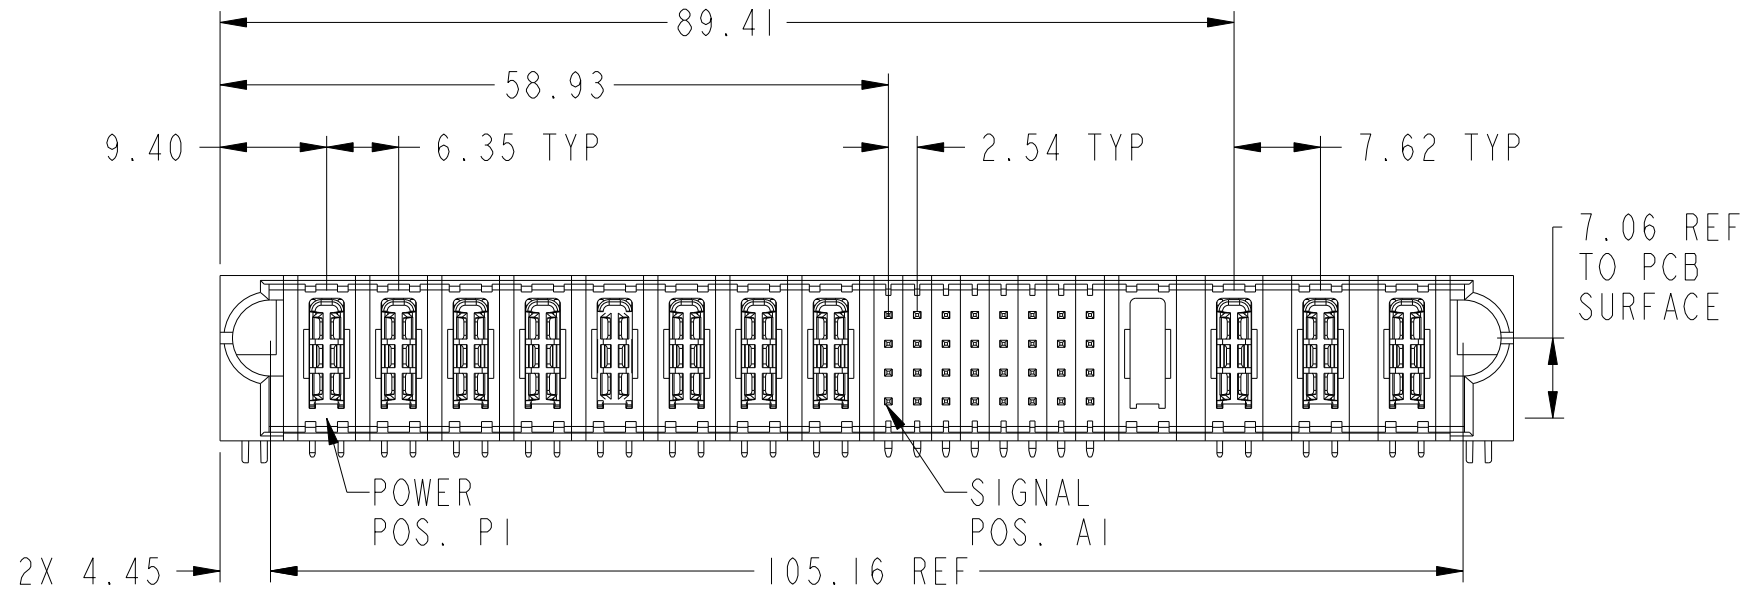
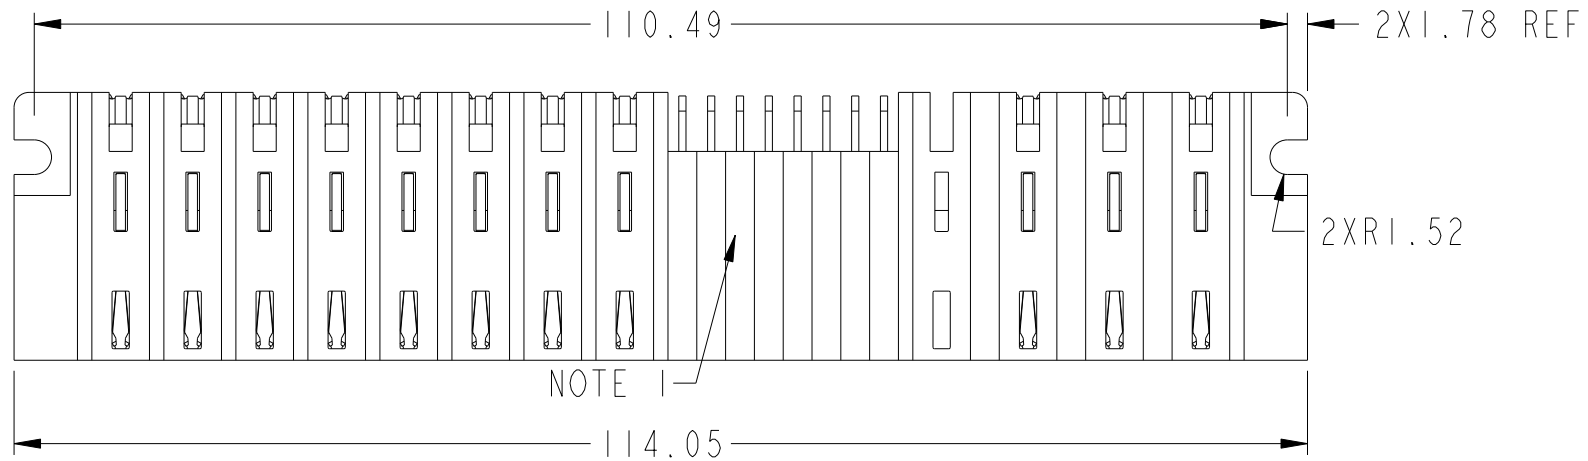



PRODUCT NUMBER



SEE SHEET 2



spec ref				dr	Sunny2 Liu	2017/06/23	projection 	MM 	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/07/24			ecn no -			
				chr	Fancy Zhang	2017/07/24			rel level Released			
				appr	Pei-Ming Zheng	2017/07/24			product family PwrBlade+			
surface ISO 1302	linear	0.X	±0.5	Amphenol FCi	title 8HP + 32S + 4ACP RA STB PLUG				dwg no 10106262-C008005	rev A		
		0.XX	±0.25									
		0.XXX	±0.10									
	angular	0°	±2°	cat. no.	Product - Customer Drw						sheet 1 of 3	

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr	Sunny2 Liu	2017/06/23	projection 	MM 	size	A3	scale	3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Sunny2 Liu	2017/07/23			ecn no -			
ISO 406 ISO 1101				chr	Fancy Zhang	2017/07/24			rel level Released			
				appr	Pei-Ming Zheng	2017/07/24	product family PwrBlade+					
surface  ISO 1302	linear	0.X	±0.5	Amphenol FCi	title	8HP + 32S + 4ACP RA STB PLUG			dwg no	10106262-C008005		rev A
		0.XX	±0.25									
		0.XXX	±0.10									
						cat. no.	Product - Customer Drw				sheet 3 of 3	