
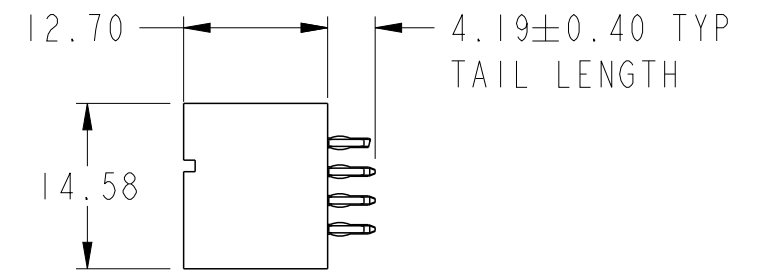
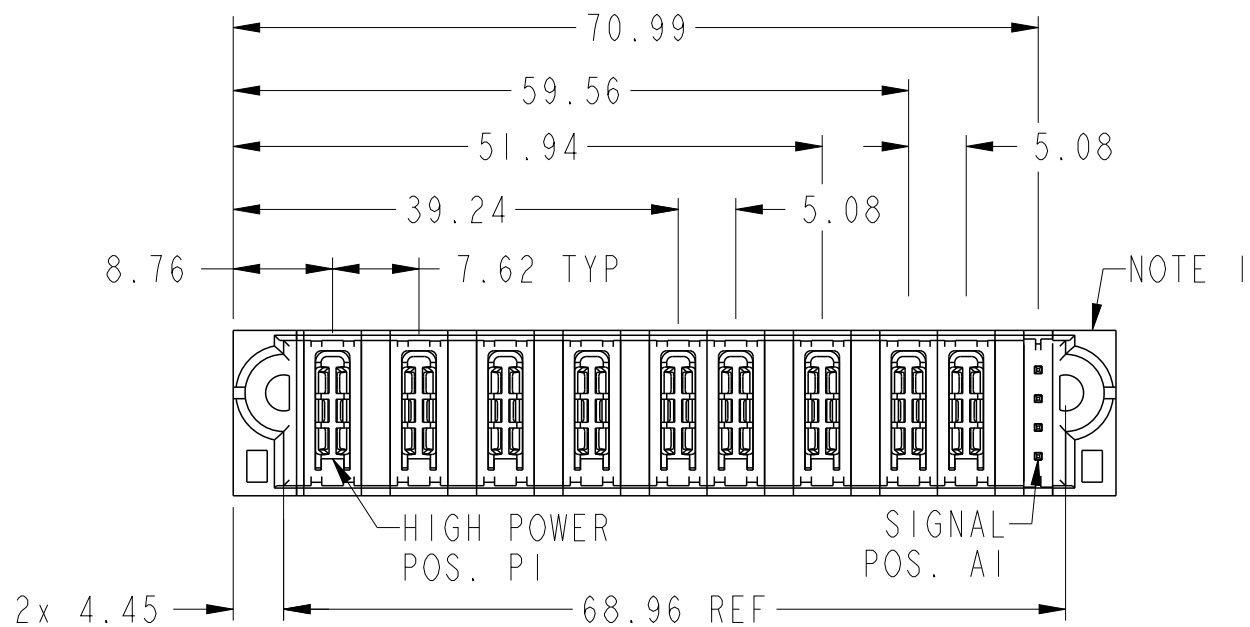
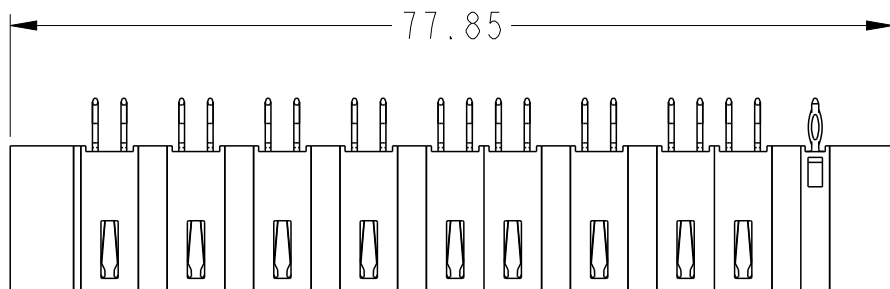


PART NUMBER SEE SHEET 2

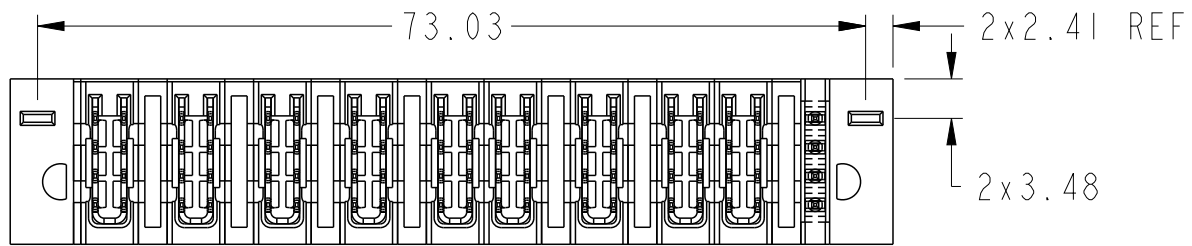


spec ref				dr	Rainbow Zhan	2016/10/10	projection	MM	size	A3	scale	3:2	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Vicking Liu	2016/10/31			ecn no	-			
				chr	Fancy Zhang	2016/10/31							
				appr	Pei-Ming Zheng	2016/10/31							
product family							PwrBlade+	rel level	Released				
surface ISO 1302	linear	0.X	±0.5	Amphenol FCI	title				dwg no	10106267-9001001		rev	A
		0.XX	±0.25										
		0.XXX	±0.10		VERTICAL PLUG PF								
	angular		0°	±2°	cat. no.		Product - Customer Drw				sheet 1 of 3		

Amphenol
FCi

© 2016 AFci

PRODUCT NO.	ROWS	HIGH POWER												S	
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	1	E2		
10106267-9001001LF	DCBA		H4	H4	H4	H4	H4H4	H4	H4H4			G			


CODE	DESCRIPTION
G	STD SIGNAL CONTACT
H4	STD HIGH POWER CONTACT

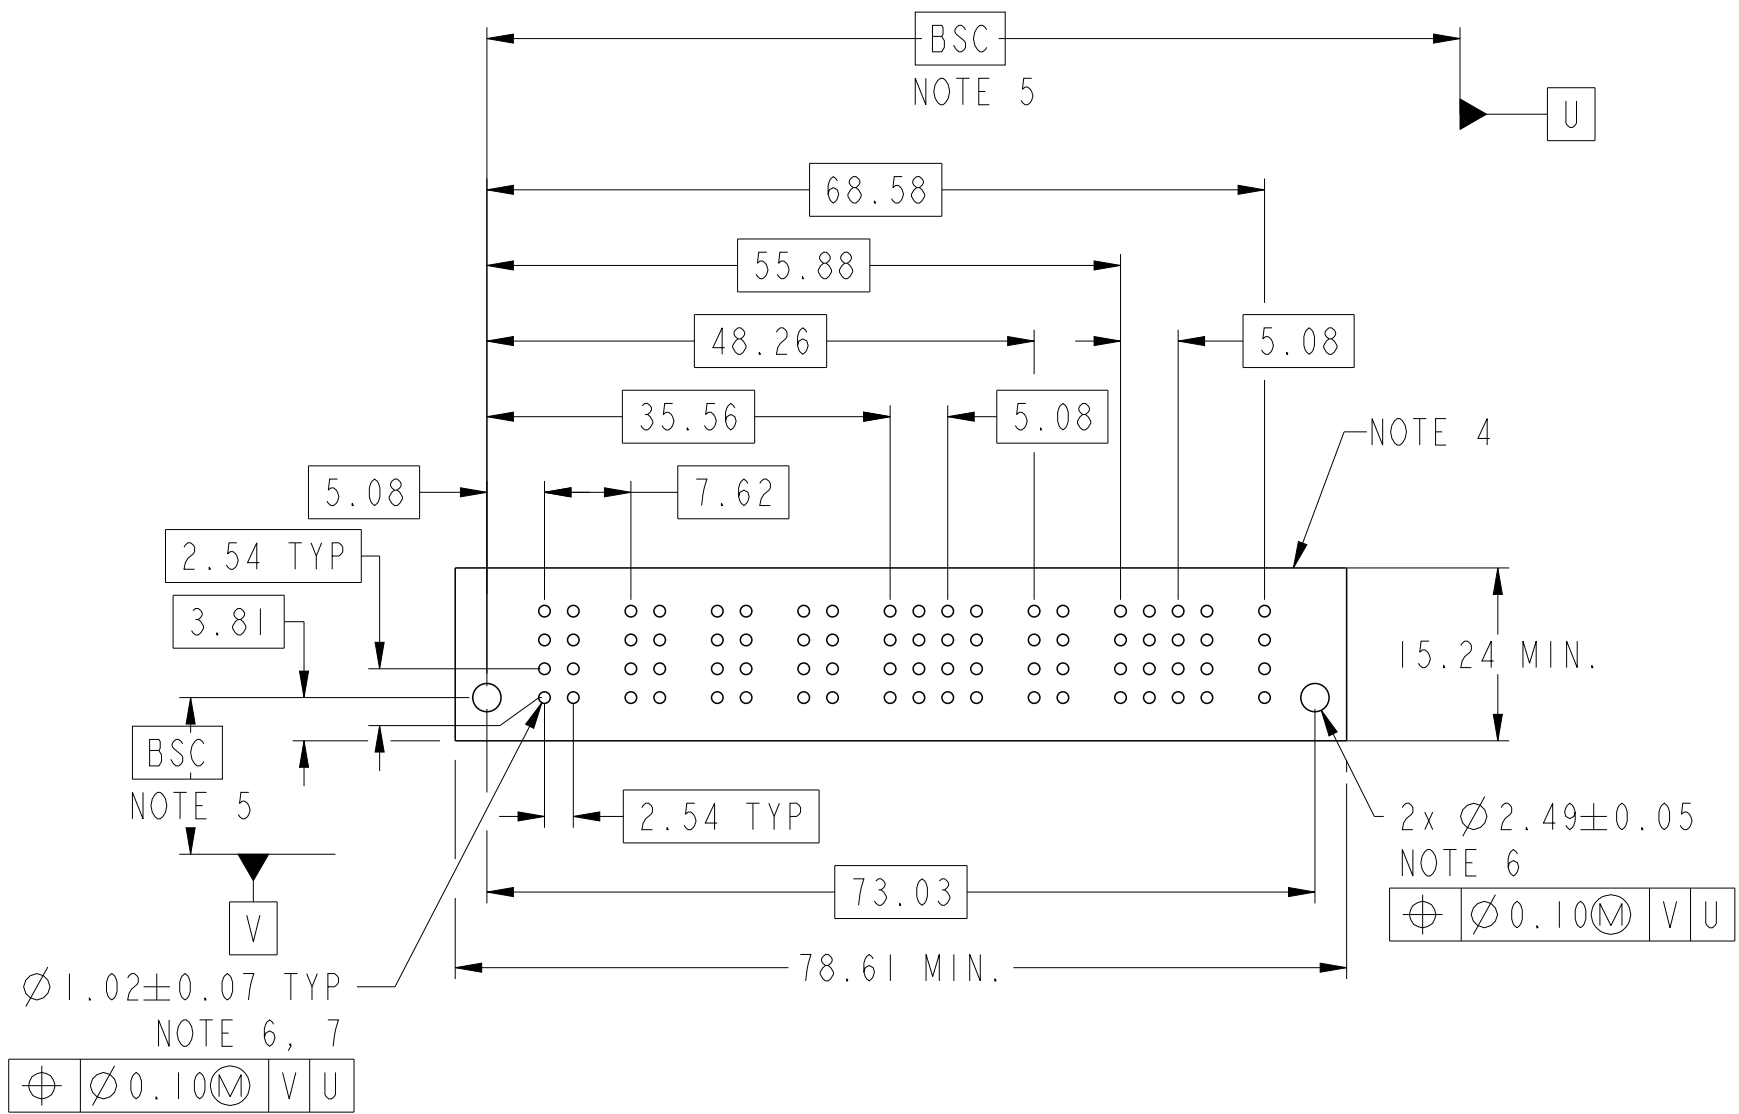

spec ref				dr		Rainbow Zhan	2016/10/10		projection		MM		size		A3	scale		3:2									
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu	2016/10/31						ecn no					-							
ISO 406						chr		Fancy Zhang	2016/10/31						rel level					Released							
ISO 1101						appr		Pei-Ming Zheng	2016/10/31											product family					PwrBlade+		
surface ISO 1302						linear		0.X		±0.5					Amphenol FCi title 9HP + 4S VERTICAL PLUG PF cat. no.					dwg no 10106267-9001001					rev		
		0.XX		±0.25																							
		0.XXX		±0.10																							
		angular		0°		±2°		Product - Customer Drw					sheet 2 of 3														

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 9)PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

spec ref				dr		Rainbow Zhan	2016/10/10		projection		MM		size		A3	scale		3:2	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu	2016/10/31						ecn no				-
ISO 406						chr		Fancy Zhang	2016/10/31						rel level				Released
ISO 1101						appr		Pei-Ming Zheng	2016/10/31						product family				PwrBlade+
surface			linear	0.X	±0.5		Amphenol FCi		title		9HP + 4S		dwg no		10106267-9001001		rev		A
				0.XX	±0.25														
				0.XXX	±0.10														
ISO 1302		angular	0°	±2°				cat. no.		Product - Customer Drw				sheet 3 of 3					