
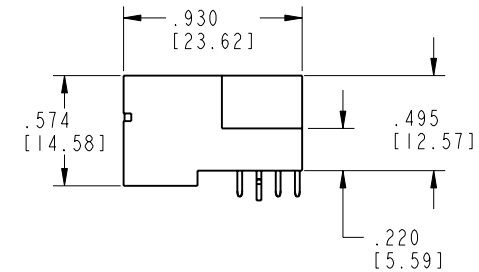
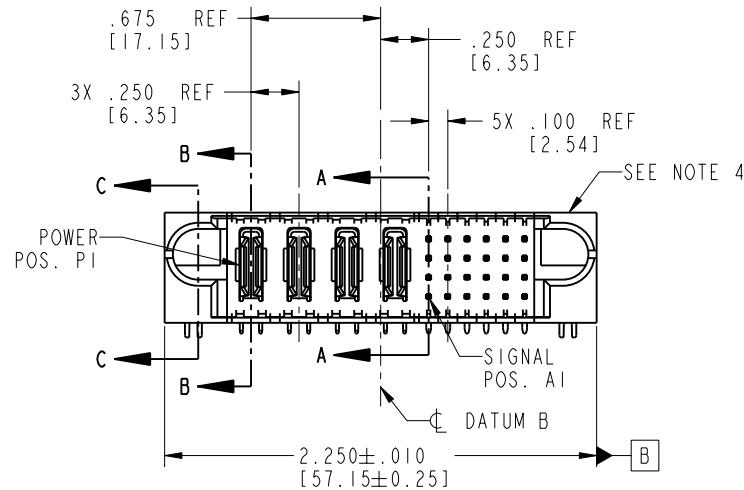


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

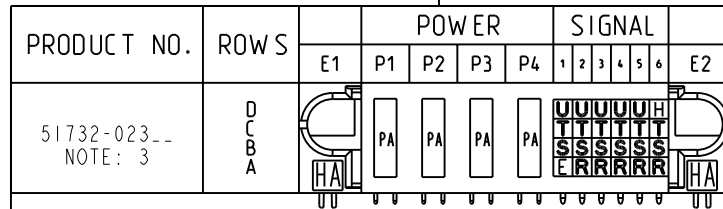

CODE	DIM "M" MATING LENGTH	CONTACT TYPE
E	.220 [5.59]	SIGNAL
H	.220 [5.59]	SIGNAL
R	.270 [6.86]	SIGNAL
S	.270 [6.86]	SIGNAL
T	.270 [6.86]	SIGNAL
U	.270 [6.86]	SIGNAL
PA	N/A [N/A]	POWER
HA	N/A [N/A]	HOLD-DOWN

mat'l code				SEE NOTE 2		tolerances unless otherwise specified				CUSTOMER		A FCI www.fciconnect.com	
lfr	ecp no.	dr	date	linear	.XX±.01/0.X±0.3				COPY		title 4P + 24S RIGHT ANGLE SOLDER HEADER		
A	V04-1007	TAB	10/05/04		.XXX±.005/0.XX±0.13				projection				
B	DG05-0554	GuoJM	12/19/05		.XXX±.0020/0.XXX±0.051								
				angles	0°±2°				INCH/MM		product family		code
				dr	T. BRUNGARD		10/05/04		← → scale 1:1		PwrBlade		213
				enqr	M. GRAY		10/05/04				size	dwg no	sheet
				chr	M. GRAY		10/05/04				A	51732-023	1 of 4
				appd	M. GRAY		10/05/04						
sheet index	revision sheet	B	B	B	B								
		1	2	3	4								

Pro/E

cage code 22526

PDM: Rev:B

STATUS: Released


Printed: Oct 08, 2006

Tous droits strictement réservés. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.


FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


PRODUCT NUMBER
51732-023--
NOTE: 3

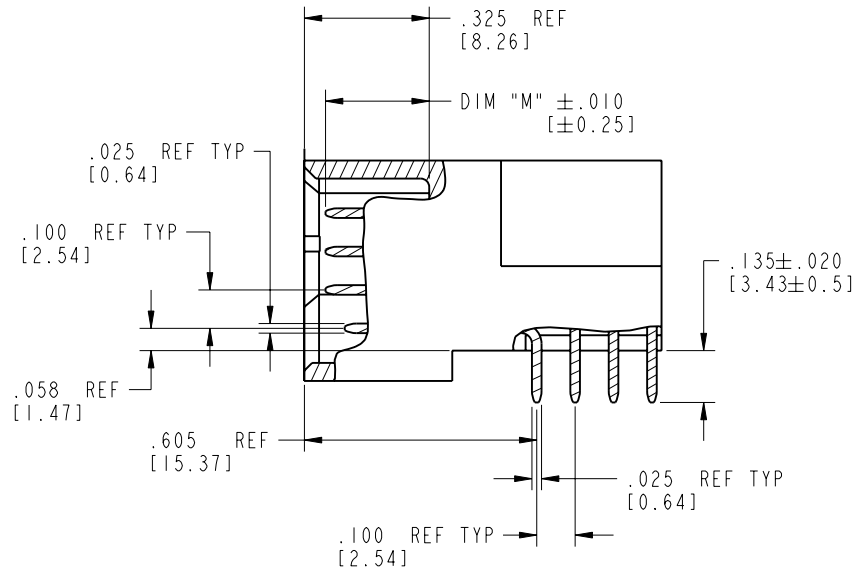


BROKEN-OUT SECTION A-A
SCALE 2:1

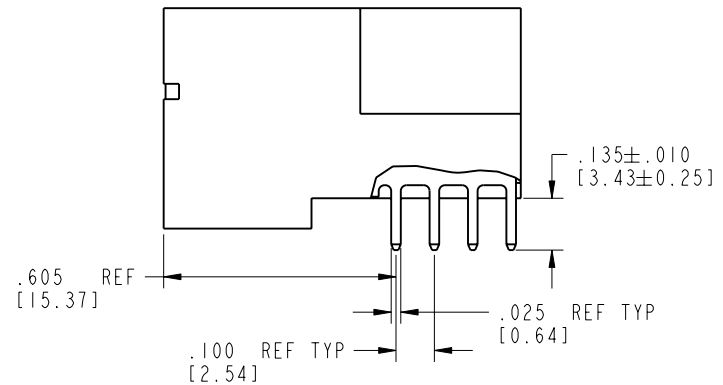

BROKEN-OUT SECTION B-B
SCALE 2:1

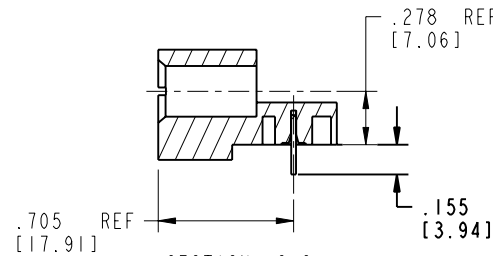

SECTION C-C

mat'l code				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com			
lfr	ecn no.	dr	date	linear	.XX±.01/0.X±0.3	COPY		title			
B					.XXX±.005/0.XX±0.13	projection		4P + 24S			
				angles	.XXX±.0020/0.XXX±0.051			RIGHT ANGLE SOLDER HEADER			
				dr	T. BRUNGARD 10/05/04	INCH/MM		product family		PwrBlade	code
				enqr	M. GRAY 10/05/04	scale		size		dwg no	213
				chr	M. GRAY 10/05/04	1:1		A		51732-023	sheet
				appd	M. GRAY 10/05/04						2 of 4
sheet index	revision sheet										

cage code 22526

Pro/E

PDM: Rev:B

STATUS: Released

Printed: Oct 08, 2006

Printed: Oct 08, 2006

PRODUCT NUMBER
51732-023--
NOTE: 3

NOTES:

1. DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH
ASME Y14.5M, 1994 UNLESS OTHERWISE SPECIFIED.

CONNECTOR NOTES:

2. HOUSING MATERIAL: UL 94 V-0 GLASS FILLED
HIGH-TEMP THERMOPLASTIC
POWER CONTACT MATERIAL: COPPER ALLOY
SIGNAL PIN MATERIAL: COPPER ALLOY

3. PLATING:
51732-023 Signal Pin:30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA.
AND 100u"/2.54um SnPb PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.
Power Pin:30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA,
AND 100u"/2.54um SnPb PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.
51732-023LF Signal Pin:30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA.
AND 78u"/2.00um Sn PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.
Power Pin:30u"/0.76um Au OVER 50u"/1.27um Ni ON THE CONTACT AREA,
AND 78u"/2.00um Sn PLATING OVER 50u"/1.27um Ni ON THE TERMINATION SECTION.

PART NUMBER 51732-023LF MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A CIRCUIT BOARD.

4. MANUFACTURER'S NAME, P/N, AND DATE CODE TO APPEAR ON
THIS SURFACE.

5. PRODUCT SPECIFICATION GS-12-149.
APPLICATION SPECIFICATION BUS-20-067.

6. PACKAGED IN TRAYS.

PCB NOTES:


7. ALL HOLE DIAMETERS ARE FINISHED HOLE SIZE.

8. MOUNTING HOLES, WHERE APPLICABLE, ARE UNPLATED.

9. $\varnothing .0453 \pm .0010$ [1.151 $\pm$ 0.025] DRILLED HOLES PLATED WITH
.0003 [0.008] MIN SnPb OVER .001 [0.03]
TO .003 [0.08] Cu PLATING TO ACHIEVE
 $\varnothing .040 \pm .003$ [1.02 $\pm$.07] HOLE.

10. "DIM XXX" TO BE DETERMINED BY THE CUSTOMER.

11. CONNECTOR KEEP-OUT ZONE.

mat'l code				SEE NOTE 2		tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com	
lfr	ecr no.	dr	date	linear	.XX $\pm$.01/0.X $\pm$ 0.3		COPY				
B					.XXX $\pm$.005/0.XX $\pm$ 0.13		projection				
				angles	.XXX $\pm$.0020/0.XXX $\pm$ 0.051		INCH/MM		title		
					0° $\pm$ 2°		scale		4P + 24S		
				dr	T. BRUNGARD	10/05/04	1:1		RIGHT ANGLE SOLDER HEADER		
				enrg	M. GRAY	10/05/04			product family		
				chr	M. GRAY	10/05/04			PwrBlade		
				appd	M. GRAY	10/05/04			code		
sheet index		revision sheet								size	
										dwg no	
										A	
										51732-023	
										sheet	
										4 of 4	

cage code 22526

Pro/E