

MULTIGIG RT 2-S TE Internal #: 2302321-1 High Speed Backplane Connectors, 56 Position, Mating Alignment, Keyed Mating Alignment Type, 7 Row, 8 Column, PCB Mount Header, MULTIGIG RT 2-S

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



Number of Positions: 56 Row-to-Row Spacing: 1.35 mm [.053 in] Mating Alignment: With Mating Alignment Type: Keyed Number of Rows: 7

Features

Product Type Features

Applied to Printed Circuit Board Type	Daughtercard
Signal Arrangement	Differential
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Unshrouded
Configuration Features	
Number of Ground Positions	20
Card Slot Centerline	20.3 mm[.8 in]
Number of Power Positions	0
Number of Pairs	16
Number of Signal Positions	4
Backplane Architecture	Traditional Backplane
Number of Positions	56
Number of Rows	7
Number of Columns	8
PCB Mount Orientation	Right Angle
Guide Location	Unguided

C For support call +1 800 522 6752

06/22/2024 09:09PM |Page 1

High Speed Backplane Connectors, 56 Position, Mating Alignment, Keyed Mating Alignment Type, 7 Row, 8 Column, PCB Mount Header, MULTIGIG RT 2-S



Signal Characteristics

Differential Impedance	100 Ω
Number of Differential Pairs per Column	2
Contact Features	
Contact Current Rating (Max)	1 A
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Mechanical Attachment	
Mating Alignment	With
Mating Alignment Type	Keyed
Connector Mounting Type	Board Mount
Housing Features	
Number of Shrouded Sides	2
Housing Material	LCP - GF (Liquid Crystal Polymer)
Centerline (Pitch)	1.8 mm[.075 in]
Dimensions	
Row-to-Row Spacing	1.35 mm[.053 in]
Usage Conditions	
Operating Temperature Range	-55 - 125 °C[-67 - 221 °F]
Operation/Application	
Circuit Application	Signal
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (13% in Component)

Row-to-Row Spacing	1.35 mm[.053 in]
Usage Conditions	
Operating Temperature Range	-55 - 125 °C[-67 - 221 °F]
Operation/Application	
Circuit Application	Signal
Product Compliance For compliance documentation, visit the product page on TE.com>	Not Compliant
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Not Compliant Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (13% in Component) Article Safe Usage Statements:

High Speed Backplane Connectors, 56 Position, Mating Alignment, Keyed Mating Alignment Type, 7 Row, 8 Column, PCB Mount Header, MULTIGIG RT 2-S



Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



TE Part # 2000676-1 Keyed Guide Pin, Machined, Vita 46

TE Part # 2000713-1 RA Keyed Guide Mod, Vita 46, Machined


Also in the Series | MULTIGIG RT 2-S



Customers Also Bought

High Speed Backplane Connectors, 56 Position, Mating Alignment, Keyed Mating Alignment Type, 7 Row, 8 Column, PCB Mount Header, MULTIGIG RT 2-S



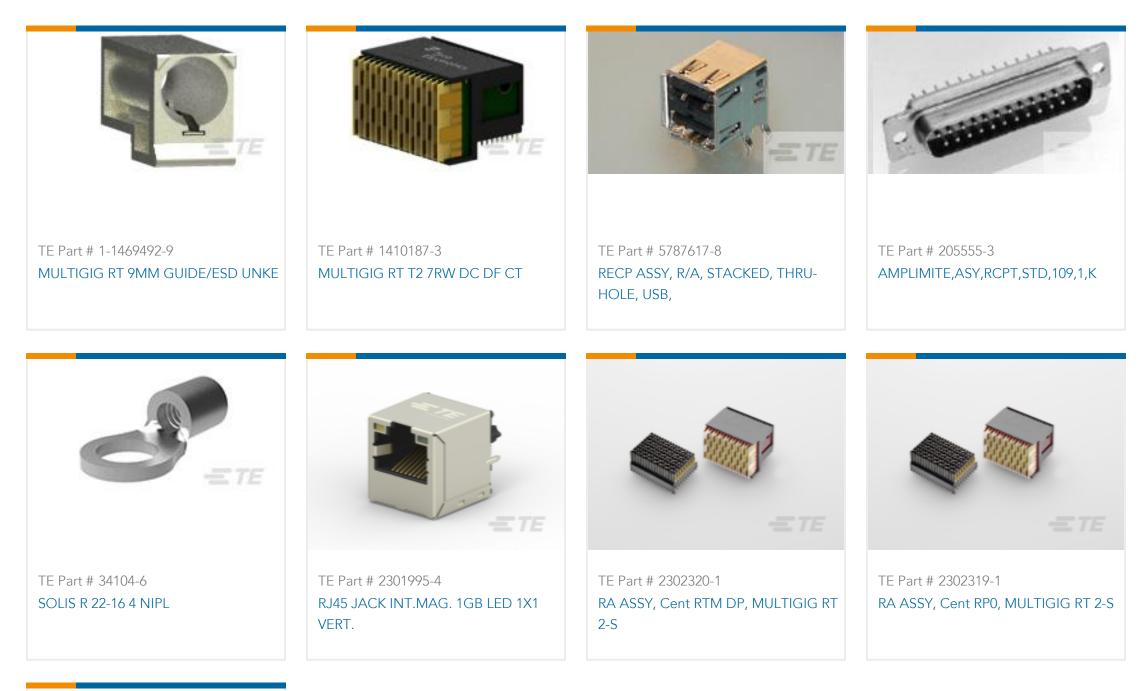



TE Part # 244836-E SMCQ 12 M AB VV 8-13 CL * H007 137 E005

Documents

Product Drawings RA ASSY, Left Half RTM, MULTIGIG RT 2-S

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2302321-1_2.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2302321-1_2.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2302321-1_2.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages

C For support call +1 800 522 6752

High Speed Backplane Connectors, 56 Position, Mating Alignment, Keyed Mating Alignment Type, 7 Row, 8 Column, PCB Mount Header, MULTIGIG RT 2-S



MULTIGIG RT 3 and RT 2-S Connectors

English

Product Specifications Application Specification

English