

XVGB3M

Monolithic tower lights, Harmony XVG, 60mm, red orange green, steady light, aluminium tube mounting and foldable bracket, IP40, 24V AC/DC



Main

| | |
|------------------------------------|--|
| Range of Product | Harmony XVG |
| Product or Component Type | Complete pre-wired monolithic tower light |
| Beacon or indicator bank unit type | 3 illuminated units |
| Material | PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube |
| Mounting diamete | 2.36 in (60 mm) |
| Component name | XVG |
| Device mounting | Tube mounting with foldable bracket |
| Light source | LED steady red LED steady green LED steady amber |
| Light block color | Red/orange/green |
| Indicator bank base type | Base without buzzer |

Complementary

| | |
|--|----------------------|
| Rated supply voltage | 24 V AC/DC |
| Cable cross section | 0.00 in² (0.33 mm²) |
| Discrete output type | PNP and NPN |
| [Uimp] rated impulse withstand voltage | 0.5 kV |
| Current Consumption | 109 mA |
| Power consumption in W | 3.1 W |
| Fundamental frequency | 2.64 kHz |
| Net Weight | 0.88 lb(US) (0.4 kg) |

Environment

| | |
|---------------------------------------|----------------------------|
| Product Certifications | CE[RETURN]EAC |
| Ambient Air Temperature for Storage | -31...158 °F (-35...70 °C) |
| Ambient air temperature for operation | 14...122 °F (-10...50 °C) |
| IP Degree of Protection | IP40 |

Ordering and shipping details

| | |
|-------------------|---------------|
| Category | US1CP4B22153 |
| Discount Schedule | CP4B |
| GTIN | 3606480390166 |
| Returnability | No |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.27 in (8.3 cm) |
| Package 1 Width | 5.51 in (14.0 cm) |
| Package 1 Length | 21.42 in (54.4 cm) |
| Package 1 Weight | 21.20 oz (601.0 g) |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 8 |
| Package 2 Height | 11.81 in (30 cm) |
| Package 2 Width | 15.75 in (40 cm) |
| Package 2 Length | 23.62 in (60 cm) |
| Package 2 Weight | 12.70 lb(US) (5.76 kg) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 30 |
| Package 3 Height | 28.35 in (72 cm) |
| Package 3 Width | 23.62 in (60 cm) |
| Package 3 Length | 31.50 in (80 cm) |
| Package 3 Weight | 67.46 lb(US) (30.6 kg) |

Offer Sustainability


| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Mounting


Ø73 mm/2.87 in., Standard

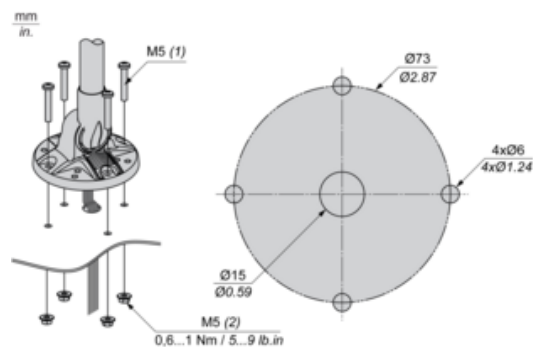

(1) Thickness + 10 mm/0.39 in.

(2) Hexagon Nut with flange


Ø73 mm/2.87 in., 45°

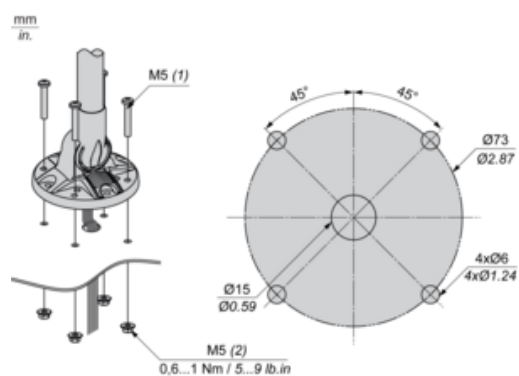

(1) Thickness + 10 mm/0.39 in.

(2) Hexagon Nut with flange


Ø54 mm/2.13 in., 45°

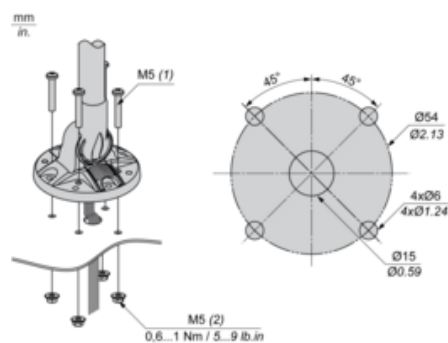

(1) Thickness + 10 mm/0.39 in.

(2) Hexagon Nut with flange

Wiring

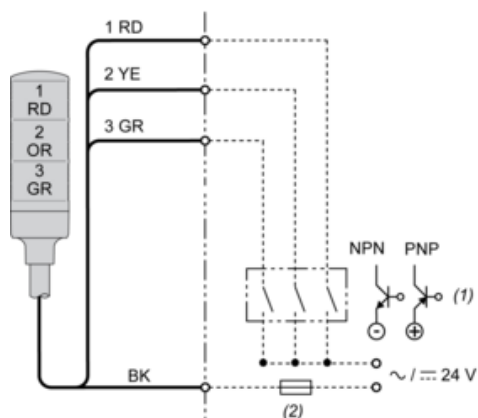

(1) "ON" for lighting and/or applying continuous sound.

(2) Fuse (rated current: 0.5 A)

RD : Red

YE : Yellow

GR : Green

OR : Orange

BK : Black