

XVGB3SM

Monolithic tower lights, Harmony XVG, 60mm, red orange green, steady light, buzzer, aluminium tube mounting foldable bracket, IP40, 24V AC/DC



Main

Range of Product	Harmony XVG
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	3 illuminated units
Material	PC (UL94 V-2): globe ABS (UL94HB): tube body Aluminium: tube
Mounting diameter	2.36 in (60 mm)
Component name	XVG
Device mounting	Tube mounting with foldable bracket
Light source	LED steady red LED steady green LED steady amber
Light block color	Red/orange/green
Indicator bank base type	Base with integrated buzzer

Complementary

Rated supply voltage	24 V AC/DC
Cable cross section	0.00 in ² (0.33 mm ²)
Discrete output type	PNP and NPN
[Uimp] rated impulse withstand voltage	0.5 kV
Current Consumption	180 mA
Noise level	85 dB
Power Consumption in W	4.1 W
Fundamental frequency	2.64 kHz
Net Weight	0.90 lb(US) (0.41 kg)

Environment

Product Certifications	CE[RETURN]EAC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient Air Temperature for Operation	14...122 °F (-10...50 °C)
IP Degree of Protection	IP40

Ordering and shipping details

Category	US1CP4B22153
Discount Schedule	CP4B
GTIN	3606480390197
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.31 in (8.4 cm)
Package 1 Width	5.47 in (13.9 cm)
Package 1 Length	21.38 in (54.3 cm)
Package 1 Weight	21.90 oz (621.0 g)
Unit Type of Package 2	S06
Number of Units in Package 2	30
Package 2 Height	28.94 in (73.5 cm)
Package 2 Width	23.62 in (60.0 cm)
Package 2 Length	31.50 in (80.0 cm)
Package 2 Weight	61.73 lb(US) (28.0 kg)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

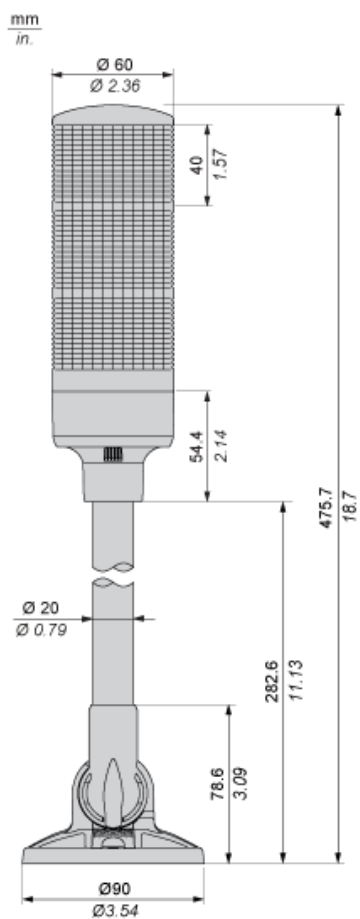


Mounting

Ø73 mm/2.87 in., Standard

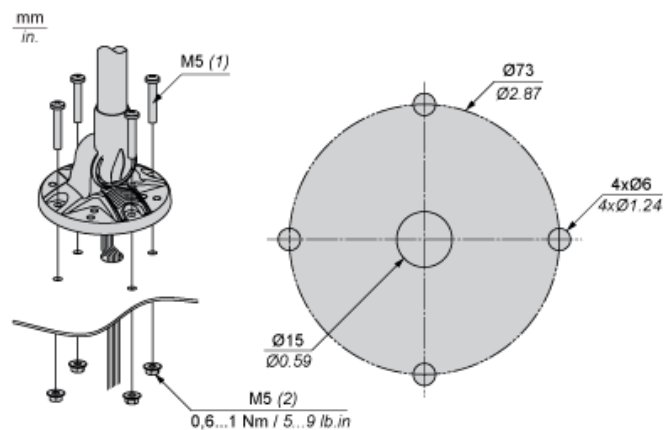


- (1) Thickness + 10 mm/0.39 in.
- (2) Hexagon Nut with flange

Ø73 mm/2.87 in., 45°

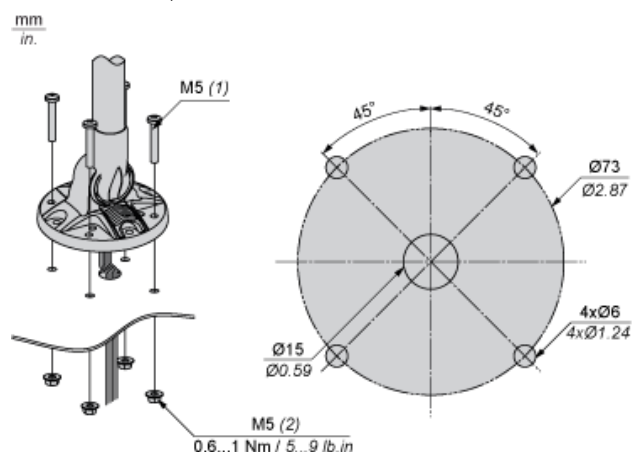


- (1) Thickness + 10 mm/0.39 in.
- (2) Hexagon Nut with flange

Ø54 mm/2.13 in., 45°

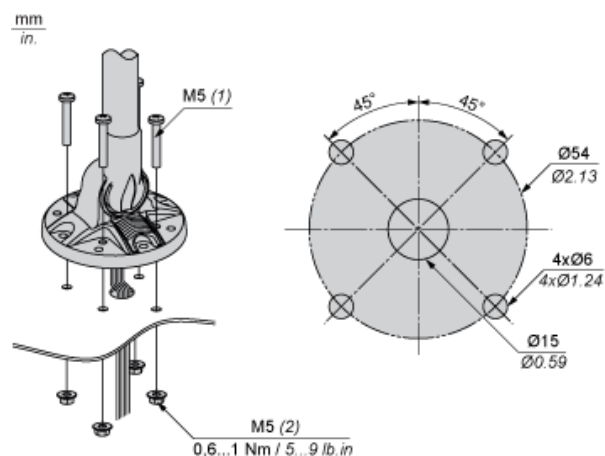

- (1) Thickness + 10 mm/0.39 in.
- (2) Hexagon Nut with flange

Wiring

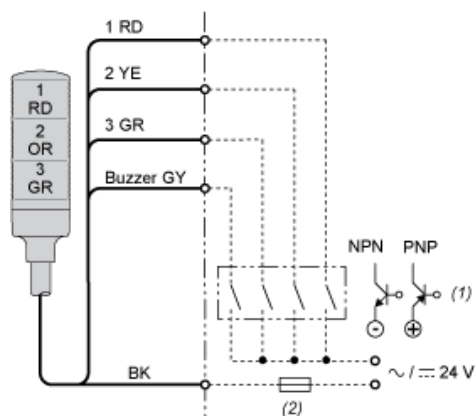

(1) "ON" for lighting and/or applying continuous sound.

(2) Fuse (rated current: 0.5 A)

RD : Red

YE : Yellow

GR : Green

GY : Grey

OR : Orange

BK : Black