




## SPC-24-24-SS

Ruland SPC-24-24-SS, 1-1/2" x 1-1/2" Rigid Coupling, 303 Stainless Steel,  
Two-Piece Clamp Style With Keyway, 2 5/8" OD, 3 7/8" Length

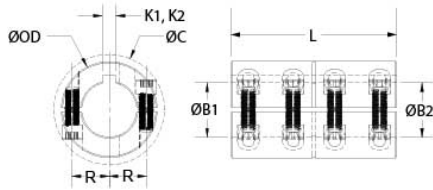

### Description

Ruland SPC-24-24-SS is a two-piece rigid coupling with 1.5000" x 1.5000" bores, 2 5/8" OD, 3 7/8" length, and 3/8" x 3/8" keyways. It has precision honed bores to ensure they are collinear and do not introduce misalignment or vibration into the system making it suitable for high precision servo applications as well as shaft to shaft connections. SPC-24-24-SS has opposing hardware for a balanced design. Proprietary Nypatch® anti-vibration coating on hardware allows for even seating of the screw, repeated screw installations, prevents galling, and maintains high holding power. It eliminates the need to treat screws upon receipt greatly reducing installation time. Forged screws test beyond ANSI standards to ensure maximum holding power. Tightly controlled bore tolerance of  $+0.002"/+0.0005"$  is maintained. SPC-24-24-SS is made from 303 stainless steel with hardware of like material for consistent corrosion resistance. It is machined from solid bar stock that is sourced exclusively from North American mills and is RoHS3 and REACH compliant. SPC-24-24-SS is manufactured in our Marlborough, MA factory under strict controls using proprietary processes.

### Product Specifications

|                                       |                                 |                                          |                                                               |
|---------------------------------------|---------------------------------|------------------------------------------|---------------------------------------------------------------|
| <b>Bore (B1)</b>                      | 1.5000 in                       | <b>Small Bore (B2)</b>                   | 1.5000 in                                                     |
| <b>Keyway (K1)</b>                    | 3/8 in                          | <b>Keyway (K2)</b>                       | 3/8 in                                                        |
| <b>B1 Max Shaft Penetration</b>       | 1.937 in                        | <b>B2 Max Shaft Penetration</b>          | 1.937 in                                                      |
| <b>Outer Diameter (OD)</b>            | 2 5/8 in                        | <b>Bore Tolerance</b>                    | $+0.0020$ in / $+0.0005$ in                                   |
| <b>Length (L)</b>                     | 3 7/8 in                        | <b>Clearance Diameter (C) MAX</b>        | 2.886 in                                                      |
| <b>Recommended Gap</b>                | 0.094 in                        | <b>Recommended Shaft Tolerance</b>       | $+0.0000$ in / $-0.0005$ in                                   |
| <b>Forged Clamp Screw</b>             | 5/16-24                         | <b>Screw Material</b>                    | 18-8 300 Series Stainless Steel with <a href="#">Nypatch®</a> |
| <b>Hex Wrench Size</b>                | 1/4 in                          | <b>Screw Finish</b>                      | Bright                                                        |
| <b>Seating Torque</b>                 | 190 lb-in                       | <b>Screw Location (R)</b>                | 1.050 in                                                      |
| <b>Number of Screws</b>               | 8 ea                            | <b>Rated Torque</b>                      | 3100 in-lb                                                    |
| <b>Moment of Inertia</b>              | 4.2902 lb-in <sup>2</sup>       | <b>Maximum Speed</b>                     | 4,000 RPM                                                     |
| <b>Full Bearing Support Required?</b> | No                              | <b>Nypatch® Anti-Vibration Hardware?</b> | Yes                                                           |
| <b>Precision Honed Bores?</b>         | Yes                             | <b>Zero-Backlash?</b>                    | Yes                                                           |
| <b>Balanced Design</b>                | Yes                             | <b>Material Specification</b>            | Type 303 Austenitic, Non-Magnetic Bar                         |
| <b>Temperature</b>                    | -40°F to 350°F (-40°C to 176°C) | <b>Finish Specification</b>              | Bright, No Plating                                            |
| <b>Manufacturer</b>                   | Ruland Manufacturing            | <b>Country of Origin</b>                 | USA                                                           |
| <b>Weight (lbs)</b>                   | 3.714800                        | <b>UPC</b>                               | 634529022856                                                  |
| <b>Tariff Code</b>                    | 8483.60.8000                    | <b>UNSPC</b>                             | 31163009                                                      |

**Note 1** Performance ratings are for guidance only. The user must determine suitability for a particular application.

**Prop 65**  **WARNING** This product can expose you to the chemical Nickel (metallic), known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Installation Instructions

- Align the SPC-24-24-SS two-piece rigid coupling on the two shafts to be connected. There should be no misalignment.
- Tighten the Nypatch® screws in two stages, starting with the inside screws. Using a 1/4 in torque wrench, tighten the inside screws to 95 lb-in which is half the recommended seating torque. Repeat the process for the outside screws, tightening to half the recommended seating torque.

3. Be sure to maintain the gap of 0.094 in between the two halves during installation.
  4. Tighten the screws to the full recommended seating torque of 190 lb-in following the same pattern, starting with the inside screws first.
  5. For optimum results do not exceed the shaft penetration length of 1.937 in.
-