

Overvoltage arrester type 2, Consisting of base element and protective plug with high-performance varistor and gas discharge tube, remote signalling contact, Mounting type: Mounting rail TS 35, 4-channel, Rated voltage: 230 VAC

### Business data

Article number	<u>16006.2</u>
Article name	CP VH 40-4 TT
GTIN (EAN)	4044211144548
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	343.2 g
Weight per piece (including packaging)	368.5 g
Unit of weight	G
Customs number	85354000
Country of origin	CN
Product description	Overvoltage arresters

### Technical data

#### Dimensions

Length	100.6 mm
Width	72 mm
Height	70 mm
Installation dimensions acc. to DIN 43880	4 Te

#### Ratings

Rated voltage Un	230 / 400 -
Rated discharge surge current In (8/20) $\mu$ s	80 kA
Rated frequency min.	50 Hz
Rated frequency max.	60 Hz
Short-circuit resistance Ip	25 kA

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	4 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	25 mm <sup>2</sup>
Wire cross-section stranded, min.	4 mm <sup>2</sup>
Wire cross-section stranded, max.	25 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	25 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	4 mm <sup>2</sup>

#### Output data

Switching current, max. at 30 V DC	2 A
Switching current, max. at 250 V AC	0.5 A
Remote signalling	Potential-free CO contact
Remote signalling: Wire cross-section single-core (rigid), max.	1,5 mm <sup>2</sup>

#### Materials

Insulation housing	Thermoplastic
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	85 °C

### Technical data

#### Further technical data

Protection class	IP20
Response time $t_A$	<25 ns
Max. continuous voltage $U_c$	280 V
Discharge current $I_{max}$ (8/20) $\mu s$ , max.	150 kA
Protection level $U_p$	<1,25 kV
Residual voltage $U_{res}$ (5 kA)	<0,5 kV
Operating current $I_c$	<1 mA
Follow-on current $I_f$	None
Follow-on current extinguishing capacity $I_{fi}$	Infinite
TOV voltage $U_t$ (L-N)	340 V / 5 s
Series fuse, max.	125 A
Malfunction display	Mechanical, red
Type of mains network	TT (3+1)
TOV voltage $U_t$ (N-PE)	1200 V / 200 ms / 300 A

#### Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

---

### Approvals

---

#### Standards and regulations

---

DIN EN 61643-11 (Germany)

Arrester type 2

EN 61643-11 (Europe)

Low voltage SPD - Class II test

IEC 61643-1 (International)



Low voltage SPD - Class II test

UL1449 ed.2 (USA)

Low voltage TVSS

---

### Media

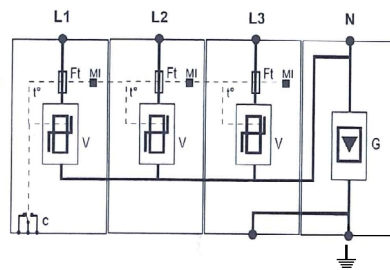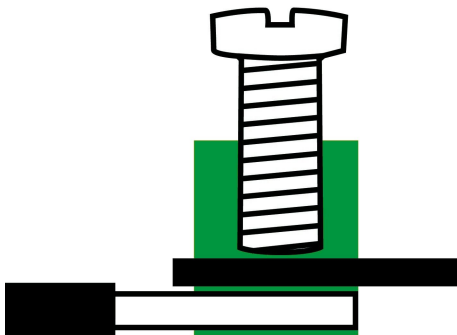

---

### Accessories

---