

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.130 ohms ±10%
D.C. RESISTANCE	5-8 tie(5+6, 7+8), @20°C	0.019 ohms ±20%
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	30.0uH ±10%
SATURATION CURRENT	1-4 20% rolloff from initial	2.60A
LEAKAGE INDUCTANCE	1-4 tie(5+6+7+8), 100kHz, 10mVAC, Ls	450nH typ., 900nH max.
DIELECTRIC	1-8 tie(5+6), 625VAC, 1 second	-
URNS RATIO	(1-4):(5-8), tie(5+6, 7+8)	3:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.
Functional insulation only.

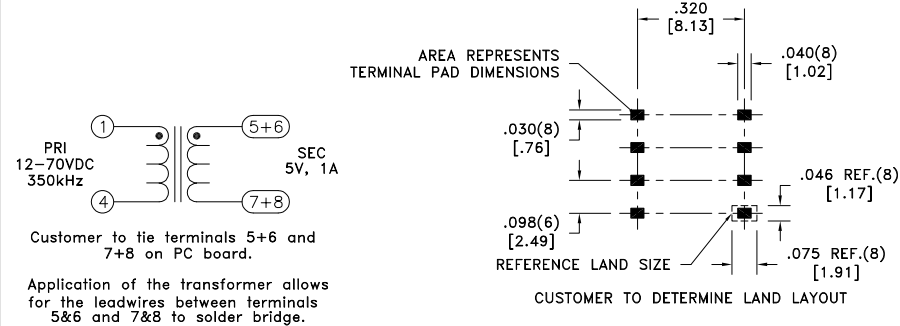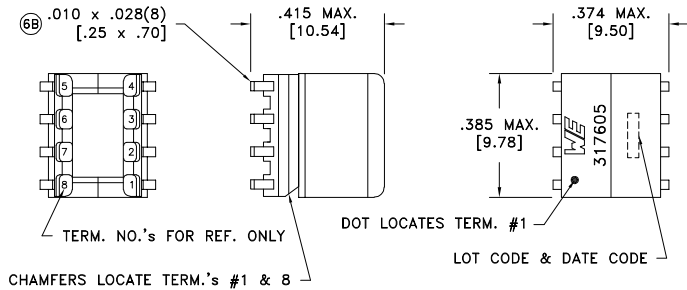

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0410 www.we-online.com/midcom		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	TRANSFORMER	750317605
6B	9/22	SEE REVISION SHEET FOR REVISION LEVEL			eiSos p/n: 750317605	SPECIFICATION SHEET 1 OF 1
6A	6/18					