

# Solder Wave Masking Tape

## SWT Series

### RoHS & REACH Compliant

Solder Wave Masking Tapes are made from crepe paper with rubber adhesive that can be removed cleanly without leaving any residue. They are ideal for use in wave soldering process to mask sensitive components and high temperature paint operations. These tapes can withstand molten solder for 5-8 seconds at 500° F. Solder Wave Masking Tapes may serve as High Temperature Masking Tapes.


## Applications

- 3D Printing and Aerospace Assembly
- Automotive Facilities and Electronic Assembly
- Wave Soldering and Solar Panels

## Product Specifications <sup>(1)</sup>

Color	Beige	
Adhesion Type	Rubber	
Total Thickness	7.6 Mil	
Material	Crepe Paper	
Adhesion to Steel	26 oz./in	
Tensile Strength	26 lbs./in	
Elongation	9 %	
Operating Temperature	150°C (300°F)	
Length	60 Yards	

(1) Specifications are subject to change at any time. If you have any questions, please contact us for the latest update.

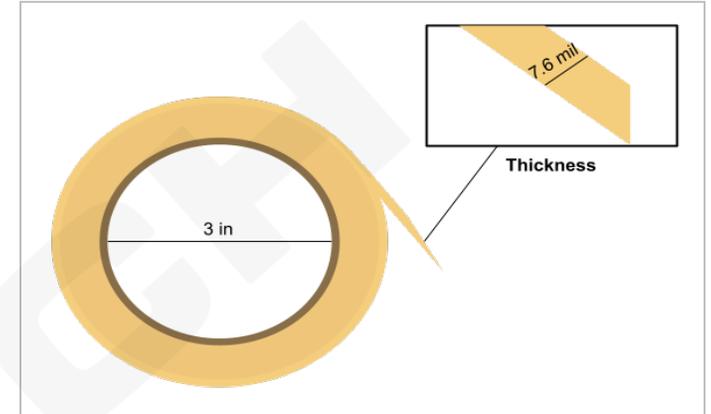

Bertech® makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its this product for any particular purpose, nor does Bertech® assume any liability whatsoever arising out of the application or use of this product. It is ultimately the responsibility of the customer to determine a product's suitability for a particular application.



**Bertech**  
640 Maple Ave  
Torrance, CA 90503  
Phone: (310) 787-0337  
Email: [sales@bertech.com](mailto:sales@bertech.com)  
[www.bertech.com](http://www.bertech.com)

**PRODUCT DATA SHEET**