


Data sheet | Item number: 231-905

Jumper; for conductor entry; 5-way; insulated; gray

www.wago.com/231-905

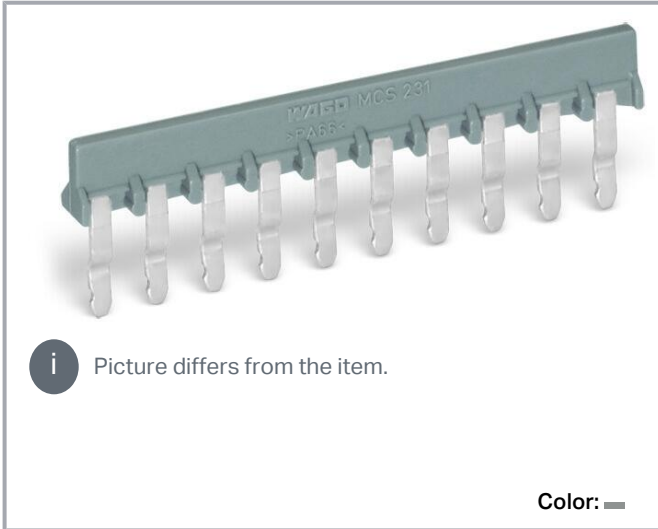

Data

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Rated voltage (III/2)	320 V
Rated impulse voltage (III/2)	4 kV
Rated current	16 A
Legend (ratings)	(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Connection data

Connection 1

Pole number	5
-------------	---

Physical data

Pin spacing	5/5.08 mm / 0.197/0.2 inches
Width	25.3 mm / 0.996 inches

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Depth	6.15 mm / 0.242 inches
Jumper assignment	1-2-3-4-5

Mechanical data

Suitable	for male and female connectors with CAGE CLAMP® connection
----------	--

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.012 MJ
Weight	1.2 g

Commercial data

Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 8.0	EC000489
ETIM 7.0	EC000489
ECCN	NO DATA
PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4045454565855
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates**General approvals**

Logo	Approval	Additional Approval Text	Certificate name
------	----------	--------------------------	------------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



CSA
DEKRA Certification B.V.

C22.2

1466354

Downloads

Documentation

Additional Information

Technical Section	2019 年4月3日	pdf	Download
Technical explanations		2.1 MB	


Environmental Product Compliance

Compliance Search


Environmental Product Compliance 231-905	URL	Download
Jumper; for conductor entry; 5-way; insulated; gray		

Installation Notes

Installation

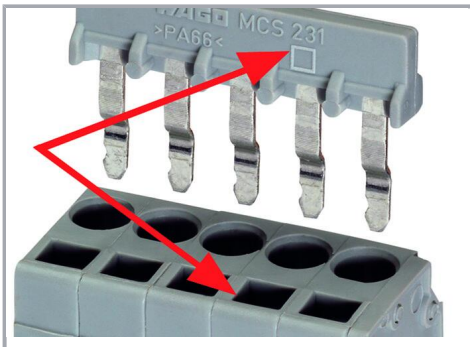

Notice: Insert jumper bar according to direction of symbols.
□ symbol correlates to the direction of the operating slot.

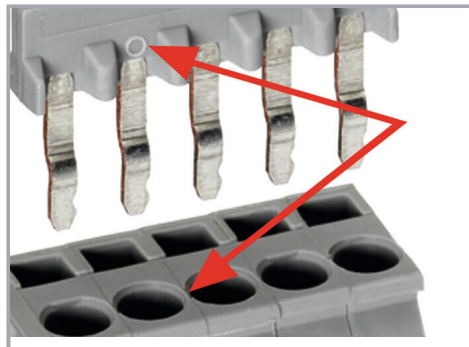


Notice: Insert jumper bar according to direction of symbols.
○ symbol shows direction to conductor entry.

Coding

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

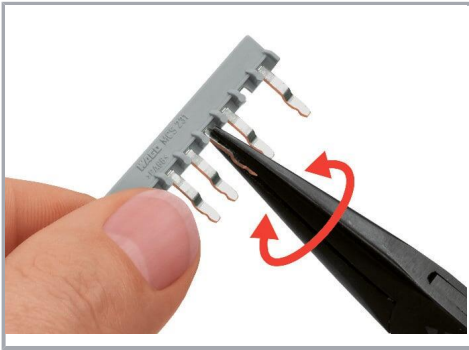


Custom comb-style jumper bars are created by breaking off jumper contacts (3 contacts and more).

Installation



Notice: Comb-style jumper bars reduce the conductor cross-section to 1.5 mm² "s" + "f-st."


Commoning

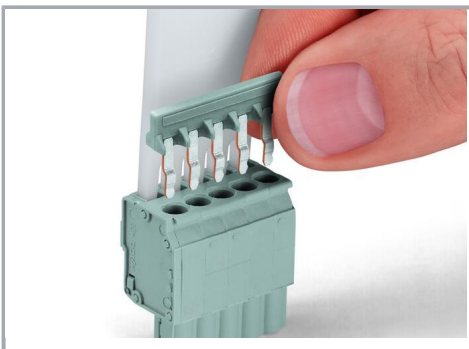

Inserting a comb-style jumper bar via multipole operating tool – with the female or male connector being supported in a suitable holding device.


Subject to changes. Please also observe the further product documentation!

Installation

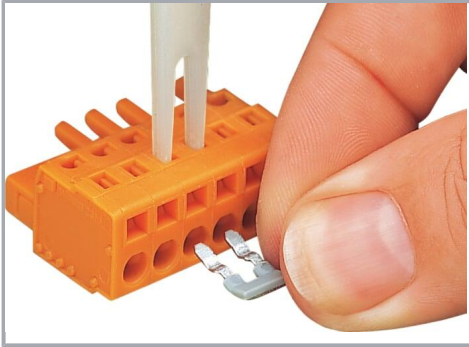

Operating tool for comb-style jumper bars
(231-902)

Application

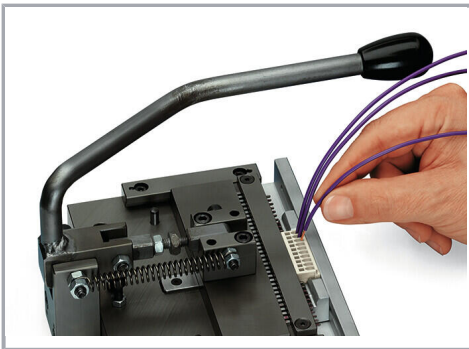

Both male and female connectors can be pre-assembled with comb-style jumper bars upon request.

Subject to changes. Please also observe the further product documentation!