


Data sheet | Item number: 280-415

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

www.wago.com/280-415

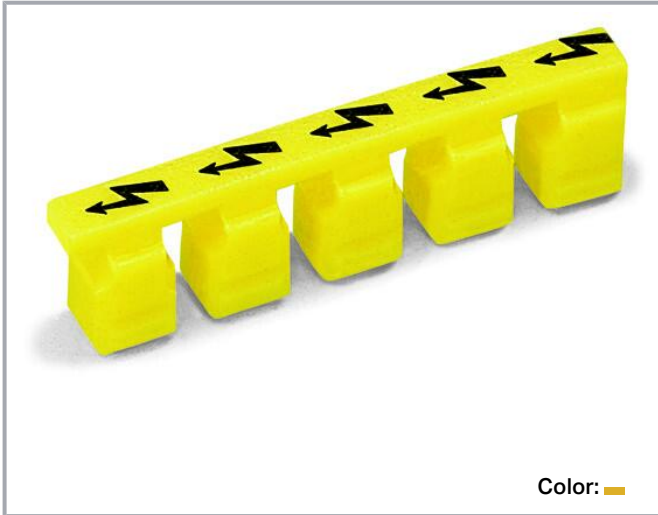

Data

Material data

Note (material data)

Information on material specifications can be found here

Color	yellow
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.01 MJ
Weight	0.3 g

Commercial data

Product Group	1 (Rail Mounted Terminal Blocks)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
ECCN	NO DATA

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



PU (SPU)	100 (25) pcs
Packaging type	box
Country of origin	DE
GTIN	4017332270632
Customs tariff number	39269097900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

Bid Text

280-415 X81 - Datei	2019 年2月19 日	xml 2.6 kB	Download
280-415 doc - Datei	2017 年4月28 日	doc 23.6 kB	Download

Additional Information

Technical Section Technical explanations	pdf 2.3 MB	Download
---	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 280-415	URL	Download
----------------------	-----	----------

CAE data

WSCAD Universe 280-415	URL	Download
ZUKEN Portal 280-415	URL	Download

Asset Administration Shell

Asset Administration Shell 280-415	URL	Download
------------------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 280-415


URL

Download

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

Installation Notes

Cover

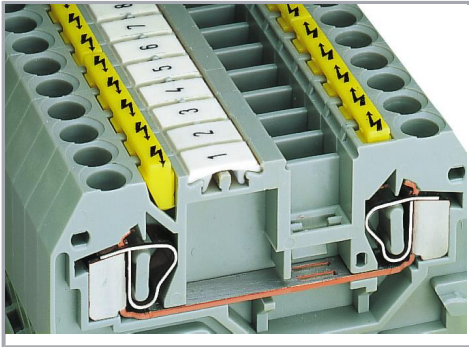

Protective warning markers inserted into the operating slots

Subject to changes. Please also observe the further product documentation!