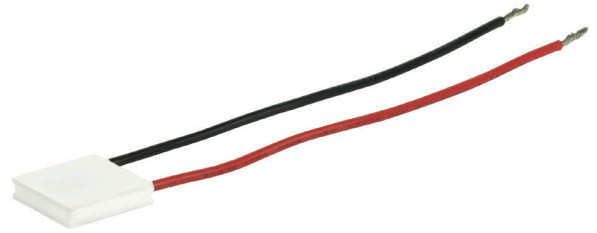


SERIES: CP08-M | **DESCRIPTION:** PELTIER MODULE


FEATURES

- solid state device
- micro size
- precise temperature control
- quiet operation


MODEL

	input voltage ¹ max [Vdc]	input current ² max [A]	$T_h=27^{\circ}\text{C}$ [W]	output Q_{\max}^3 $T_h=50^{\circ}\text{C}$ [W]	$T_h=27^{\circ}\text{C}$ [°C]	output ΔT_{\max}^4 $T_h=50^{\circ}\text{C}$ [°C]
CP081030-M	8.8	0.8	3.7	4.2	68	75

Notes: 1. Maximum voltage at ΔT_{\max} and $T_h=27^{\circ}\text{C}$
 2. Maximum current to achieve ΔT_{\max}
 3. Maximum heat absorbed at cold side occurs at I_{\max} , V_{\max} , and $\Delta T=0^{\circ}\text{C}$
 4. Maximum temperature difference occurs at I_{\max} , V_{\max} , and $Q=0\text{W}$ (ΔT_{\max} measured in a vacuum at 1.3 Pa)

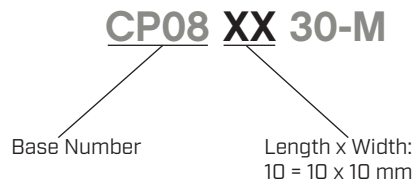PART NUMBER KEY


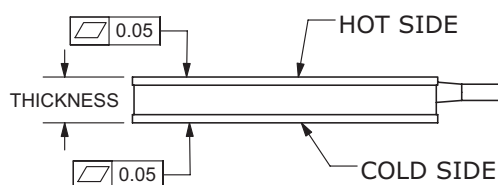
SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
internal resistance ¹		8.865	9.85	10.835	Ω
solder melting temperature	connection between thermoelectric pairs	235			$^{\circ}\text{C}$
assembly compression				0.8	MPa
hot side plate				80	$^{\circ}\text{C}$
RoHS	yes				



Note: 1. Measured by AC 4-terminal method at 25 $^{\circ}\text{C}$

MECHANICAL DRAWING

units: mm




	MATERIAL	PLATING
ceramic plate	96% Al_2O_3	
wire leads	28 AWG	tin
sealer	silicon rubber 703 RTV (between cold and hot side plates)	
joint cover	silicon rubber 703 RTV	
marking	P/N & S/N printed on cold side surface	

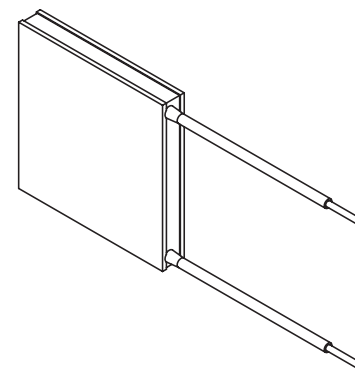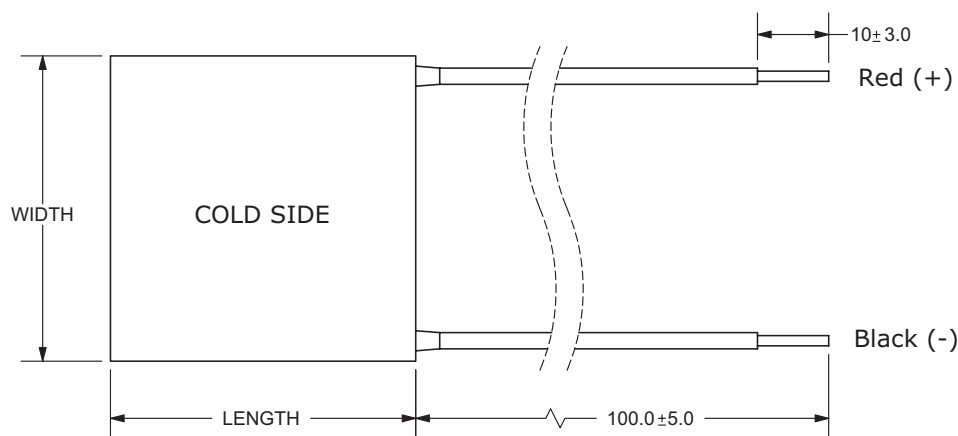


MODEL NO.	LENGTH [mm]	WIDTH [mm]	THICKNESS [mm]
CP081030-M	10 ± 0.3	10 ± 0.3	3.0 ± 0.1

PERFORMANCE (Th=27°C)

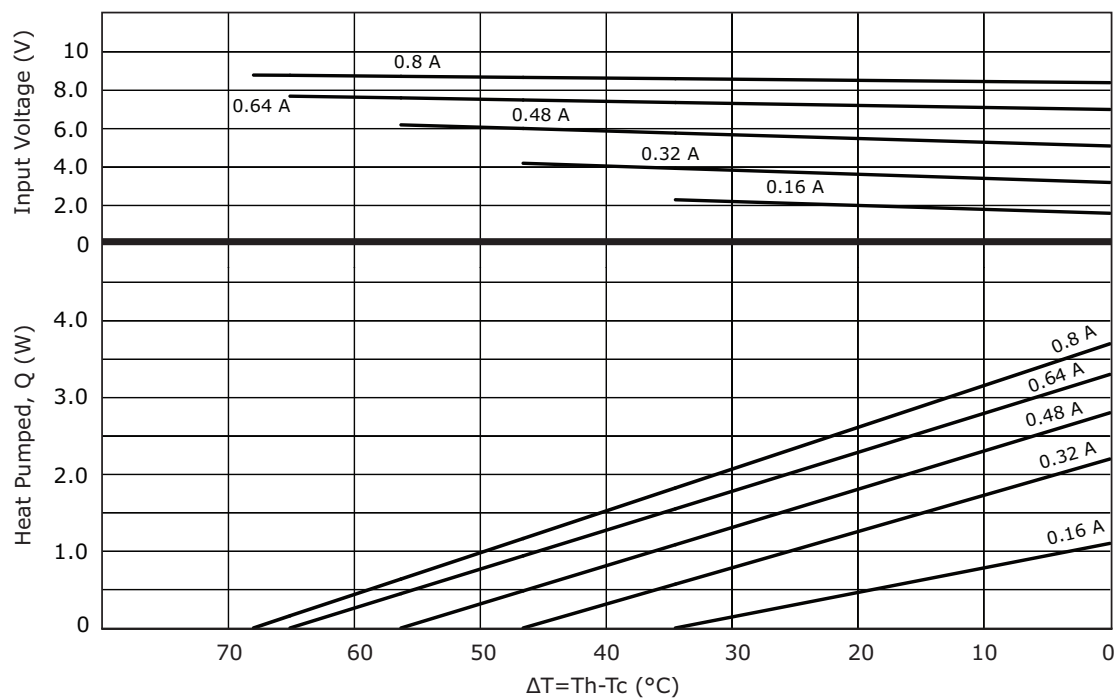

PERFORMANCE (Th=50°C)

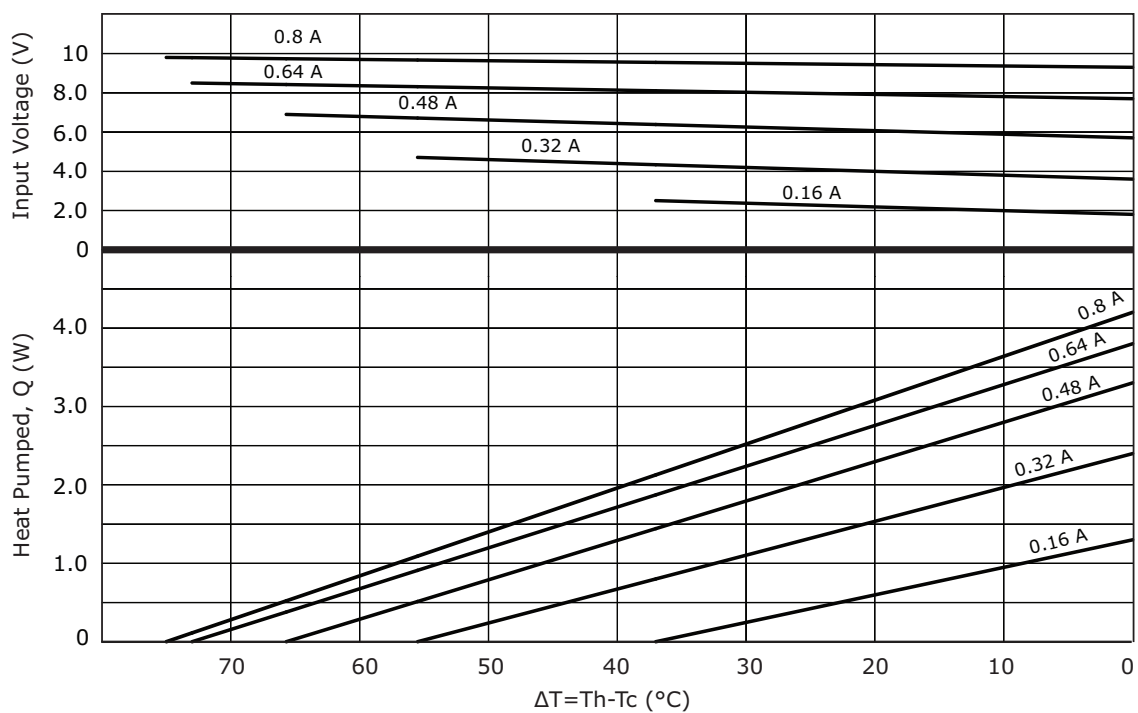

REVISION HISTORY

rev.	description	date
1.0	initial release	09/08/2016
1.01	brand update	10/28/2019
1.02	logo, datasheet style update	08/05/2022

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

cuidevices.com