


Waterproof Toggle Switches

Bat Handle



Features

- **Waterproof:** IP56
- **Single Pole Types**
- **Internal "O" Ring for Moisture and Dust Resistance**
- **.250" Quick Connect Terminals**

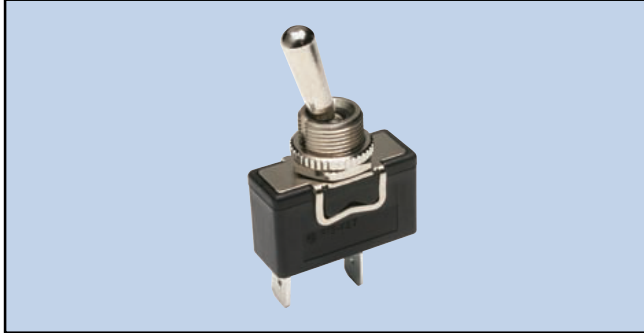

NTE Type No.	Circuitry	Current Rating	Action			Actuator	Diag No.
54-348W#	SPST	B	ON	NONE	OFF	Brass/Nickel Plate	S115b
54-349W	SPDT	A	ON	NONE	ON	Brass/Nickel Plate	S115b
54-350W	SPDT	A	ON	OFF	ON	Brass/Nickel Plate	S115b
54-352W##	SPDT	A	(ON)	OFF	(ON)	Brass/Nickel Plate	S115b
54-354W	SPST	B	ON	NONE	OFF	Brass/Nickel Plate	S115c
54-355W##	SPDT	A	ON	NONE	ON	Brass/Nickel Plate	S115c
54-356W	SPDT	A	ON	OFF	ON	Brass/Nickel Plate	S115c
54-358W##	SPDT	A	(ON)	OFF	(ON)	Brass/Nickel Plate	S115c


NOTE: Photo may differ from actual switch. You may receive an all-plastic device.

SPECIAL NOTE: () = Momentary Function

UL for 16 Amp **ONLY**

UL for 12 Amp **ONLY**

S115

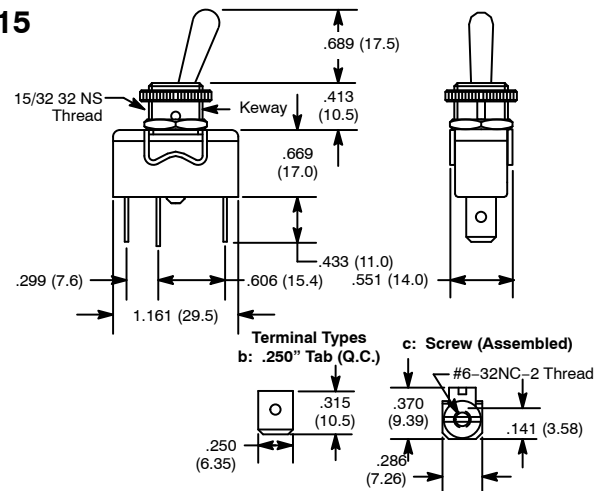

Specifications

Current Rating:

A: 16A 277VAC, 1 HP

B: 20A 277VAC, 1 HP

Insulation Resistance: 100 Megohms (min.) at 500VDC

Dielectric Strength: 1500V RMS (min.)

Temperature Rating: +32° to +149°F (0° to +65°C)

Electrical Life: 6,000 cycles

Mechanical Life: 10,000 cycles at full load

Terminal Type: Refer to Diag No. in Table


Mounting Hole: .472 (12.0)

Bat Handle



Features

- **Waterproof:** IP56
- **Double Pole Types**
- **Internal "O" Ring for Moisture and Dust Resistance**
- **.250" Quick Connect Terminals**

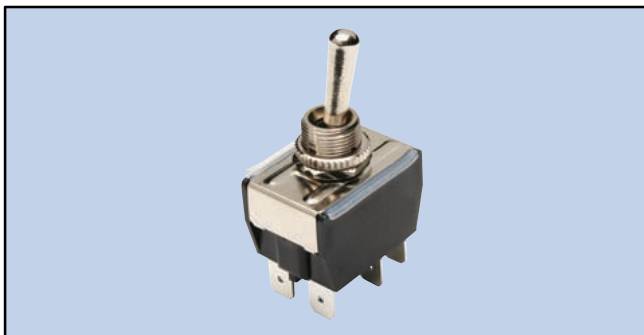


NTE Type No.	Circuitry	Current Rating	Action			Actuator	Diag No.
54-360W	DPDT	A	ON	NONE	ON	Brass/Nickel Plate	S114b
54-361W	DPDT	A	ON	OFF	ON	Brass/Nickel Plate	S114b
54-364W	DPDT	A	(ON)	OFF	(ON)	Brass/Nickel Plate	S114b
54-366W##	DPST	B	ON	NONE	OFF	Brass/Nickel Plate	S114b
54-367W	DPST	B	ON	NONE	OFF	Brass/Nickel Plate	S114c
54-369W	DPDT	A	ON	NONE	ON	Brass/Nickel Plate	S114c
54-370W##	DPDT	A	ON	OFF	ON	Brass/Nickel Plate	S114c
54-373W	DPDT	A	(ON)	OFF	(ON)	Brass/Nickel Plate	S114c

NOTE: Photo may differ from actual switch. You may receive an all-plastic device.

SPECIAL NOTE: () = Momentary Function

UL for 12 Amp **ONLY**

S114

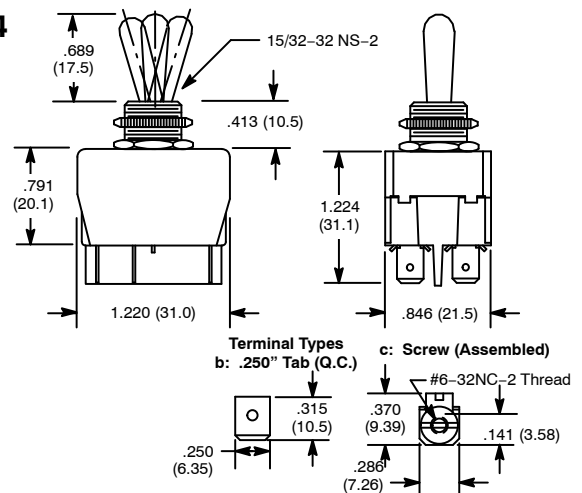

Specifications

Current Rating:

A: 16A 250VAC, 1 HP

B: 20A 277VAC, 1 HP

Insulation Resistance: 100 Megohms (min.) at 500VDC

Dielectric Strength: 1500V RMS (min.)

Temperature Rating: +32° to +149°F (0° to +65°C)

Electrical Life: 6,000 cycles

Mechanical Life: 10,000 cycles at full load

Terminal Type: Refer to Diag No. in Table

Mounting Hole: .472 (12.0)

Waterproof Toggle Switches

Bat Handle w/Tri-Color LED Ring




S150

Features


- IP67 Waterproof Rating
- Includes 6 (Red, Blue, Green, Yellow, Black, & White) Wires with Quick Connect Terminals




NTE Type No.	Circuitry	Action		Material	Actuator			Diag No.
					Color	Neon	LED	
54-748	SPST	ON	OFF	PC	-	-	Red	DC
							Green	
							Blue	

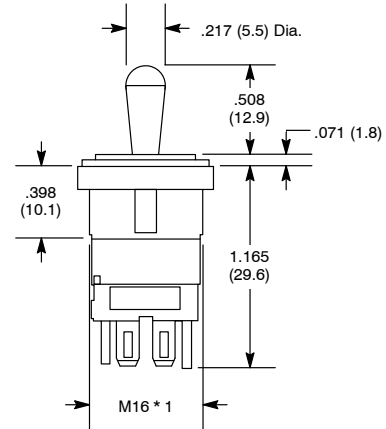

Mounting Hole



Pin Connections (Bottom View)



Pin #	Function
Pin1	LED (+)
Pin2	Blue LED (-)
Pin3	Switch (-)
Pin4	Green LED (-)
Pin5	Red LED (-)
Pin6	Switch (+)

Specifications

Current Rating: 20A 12VDC, 15A 125VAC, 5A 250VAC

Lens Color: See Table

Lamp Voltage: 12V LED (DC)

Insulation Resistance: 100 Megohms

Temperature Rating: -13° to +131°F (-25° to +55°C)

Terminal Type: .250" Tab Q.C.

Mounting Hole: .630 (16.0)