	<b>E480232</b>
---	----------------

**Features**

- Fully Automotive Qualified to AEC-Q101
- For Surface Mount Applications
- Excellent Clamping Capability
- High Temp Soldering: 260°C / 10 Seconds At Terminals
- Halogen Free. "Green" Device (Note 1)
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note2) ("P" Suffix Designates RoHS Compliant. See Ordering Information)
- ESD protection of data lines in accordance with IEC 61000-4-2, ±30kV(Air), ±30kV (Contact)





**Maximum Ratings**

Parameter	Symbol	Value	Unit
Peak Pulse Power Surge Current with a 10/1000µs Waveform (Note 3)	$I_{PPM}$	See Next Table	A
Peak Pulse Power Dissipation(Note 3)	$P_{PPM}$	600	W
Power Dissipation on Infinite Heatsink at $T_L = 85^\circ\text{C}$	$P_D$	3.0	W
Peak Forward Surge Current Unidirectional Only (Note 4)	$I_{FSM}$	60	A

**Note:**

1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
2. High Temperature Solder Exemption Applied, see EU Directive Annex 7a.
3. Non-repetitive current pulse, per Fig.3 and derated above  $T_A = 25^\circ\text{C}$  per Fig.4.
4. 8.3ms, single half sine wave duty cycle = 4 pulses per Minutes maximum.


**Internal Structure**

Description	Simplified outline	Graphic symbol
Uni-directional		
Bi-directional		

XXXX = Marking code YYWW = Date Code


**600Watt TVS  
10 to 100  
Volts**

**SMA (DO-214AC)  
LEAD FRAME**

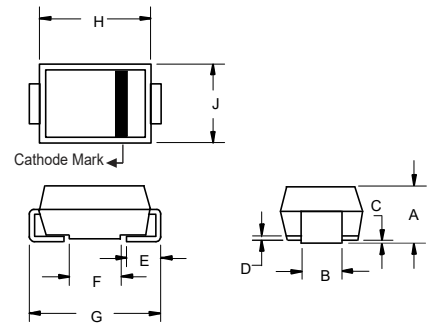

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.075	0.096	1.90	2.44	
B	0.050	0.064	1.27	1.63	
C	0.002	0.008	0.051	0.203	
D	---	0.020	---	0.51	
E	0.030	0.060	0.76	1.52	
F	0.065	0.091	1.65	2.32	
G	0.189	0.220	4.80	5.59	
H	0.157	0.187	4.00	4.75	
J	0.090	0.115	2.25	2.92	

**SUGGESTED SOLDER PAD LAYOUT**

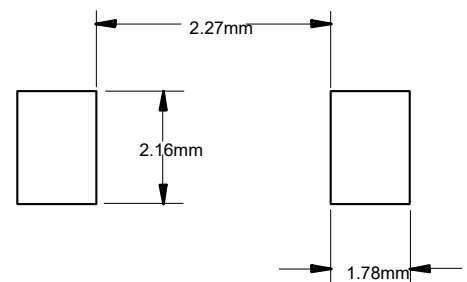

## Thermal Characteristics

Parameter	Symbol	Value	Unit
Operating Junction Temperature Range	$T_J$	-55 to +175	°C
Storage Temperature Range	$T_{STG}$	-55 to +175	°C
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	30	°C/W
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	120	°C/W
Typical Thermal Resistance Junction to Case	$R_{\theta JC}$	50	°C/W

**Note:**

5. Mounted on 0.2 x 0.2" (5.0 x 5.0 mm) copper pads to each terminal.

**Electrical Characteristics @ 25°C Unless Otherwise Specified**

MCC Part Number		Working Peak Reverse Voltage $V_{RWM}(V)$	Breakdown Voltage $V_{BR}$ @ $I_T$			Maximum Clamping Voltage @ $I_{PP}$ $V_C(V)$	Maximum Reverse Surge Current $I_{PP}(A)$	Maximum Reverse Leakage @ $V_{RWM}$ $I_R(\mu A)$	Device Marking Code	
(Uni)	(Bi)		Min (V)	Max (V)	$I_T$ (mA)				Uni	Bi
SMA6J10AQ	SMA6J10CAQ	10	11.1	12.3	1	17.0	35.3	5	KX	TX
SMA6J11AQ	SMA6J11CAQ	11	12.2	13.5	1	18.2	33.0	5	KZ	TZ
SMA6J12AQ	SMA6J12CAQ	12	13.3	14.7	1	19.9	30.2	5	LE	UE
SMA6J13AQ	SMA6J13CAQ	13	14.4	15.9	1	21.5	27.9	1	LG	UG
SMA6J14AQ	SMA6J14CAQ	14	15.6	17.2	1	23.2	25.9	1	LK	UK
SMA6J15AQ	SMA6J15CAQ	15	16.7	18.5	1	24.4	24.6	1	LM	UM
SMA6J16AQ	SMA6J16CAQ	16	17.8	19.7	1	26.0	23.1	1	LP	UP
SMA6J17AQ	SMA6J17CAQ	17	18.9	20.9	1	27.6	21.7	1	LR	UR
SMA6J18AQ	SMA6J18CAQ	18	20.0	22.1	1	29.2	20.6	1	LT	UT
SMA6J19AQ	SMA6J19CAQ	19	22.1	23.3	1	30.8	19.5	1	LU	UU
SMA6J20AQ	SMA6J20CAQ	20	22.2	24.5	1	32.4	18.5	1	LV	UV
SMA6J22AQ	/	22	24.4	26.9	1	35.5	16.9	1	LX	/
SMA6J24AQ	/	24	26.7	29.5	1	38.9	15.4	1	LZ	/
SMA6J26AQ	/	26	28.9	31.9	1	42.1	14.3	1	ME	/
SMA6J28AQ	/	28	31.1	34.4	1	45.4	13.2	1	MG	/
SMA6J30AQ	/	30	33.3	36.8	1	48.4	12.4	1	MK	/
SMA6J33AQ	/	33	36.7	40.6	1	53.3	11.3	1	MM	/
SMA6J36AQ	/	36	40.0	44.2	1	58.1	10.3	1	MP	/
SMA6J40AQ	/	40	44.4	49.1	1	64.5	9.3	1	MR	/
SMA6J43AQ	/	43	47.8	52.8	1	69.4	8.7	1	MT	/
SMA6J45AQ	/	45	50.0	55.3	1	72.7	8.3	1	MV	/
SMA6J48AQ	/	48	53.3	58.9	1	77.4	7.8	1	MX	/
SMA6J51AQ	/	51	56.7	62.7	1	82.4	7.3	1	MZ	/
SMA6J54AQ	/	54	60.0	66.3	1	87.1	6.9	1	NE	/
SMA6J58AQ	/	58	64.4	71.2	1	93.6	6.4	1	NG	/
SMA6J60AQ	/	60	66.7	73.7	1	96.8	6.2	1	NK	/
SMA6J64AQ	/	64	71.1	78.6	1	103.0	5.8	1	NM	/
SMA6J70AQ	/	70	77.8	86.0	1	113.0	5.3	1	NP	/
SMA6J75AQ	/	75	83.3	92.1	1	121.0	5.0	1	NR	/
SMA6J78AQ	/	78	86.7	95.8	1	126.0	4.8	1	NT	/
SMA6J80AQ	/	80	88.8	97.6	1	129.6	4.6	1	NV	/
SMA6J85AQ	/	85	94.4	104.0	1	137.0	4.4	1	NX	/
SMA6J90AQ	/	90	100.0	111.0	1	146.0	4.1	1	NZ	/
SMA6J100AQ	/	100	111.0	123.0	1	162.0	3.7	1	OE	/

**Curve Characteristics**

Fig. 1 - Peak Pulse Power Rating Curve

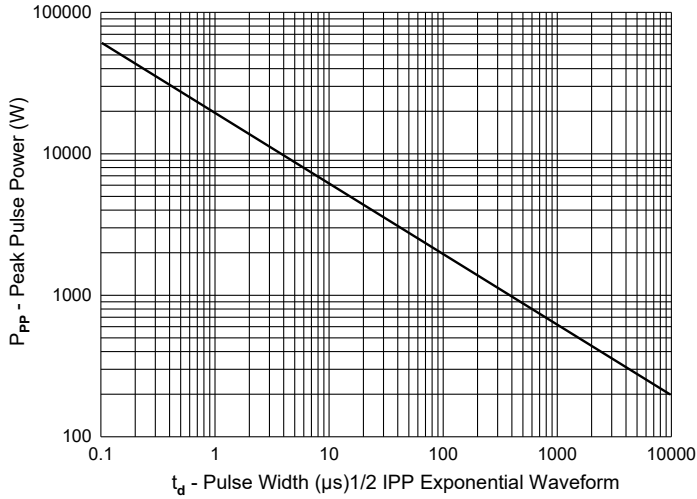


Fig. 2 - Typical Junction Capacitance

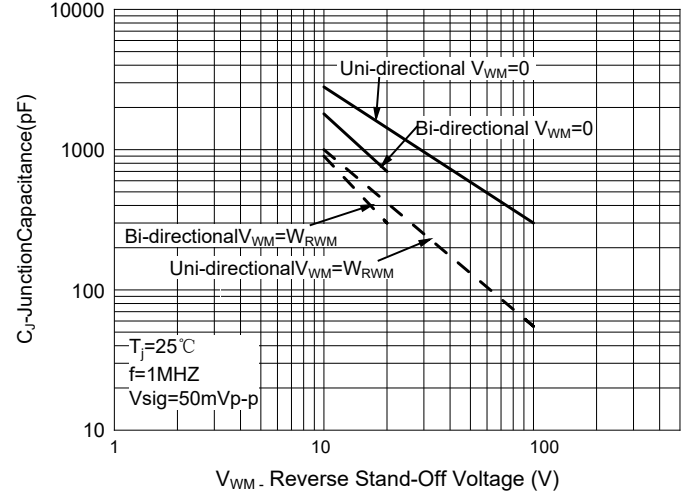


Fig. 3 - Pulse Waveform


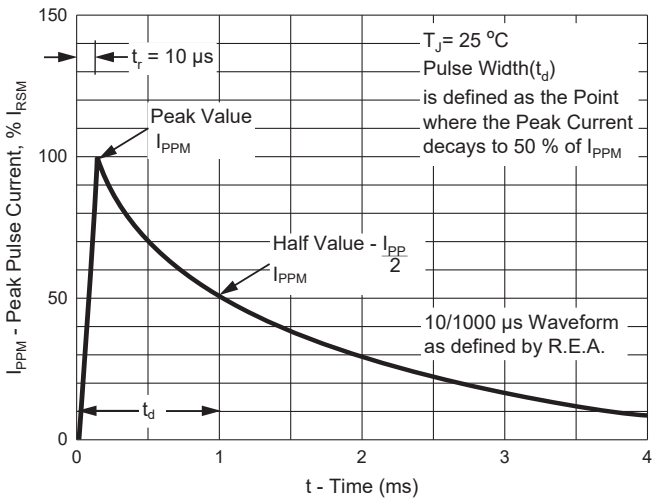


Fig. 4 - Pulse Derating Curve

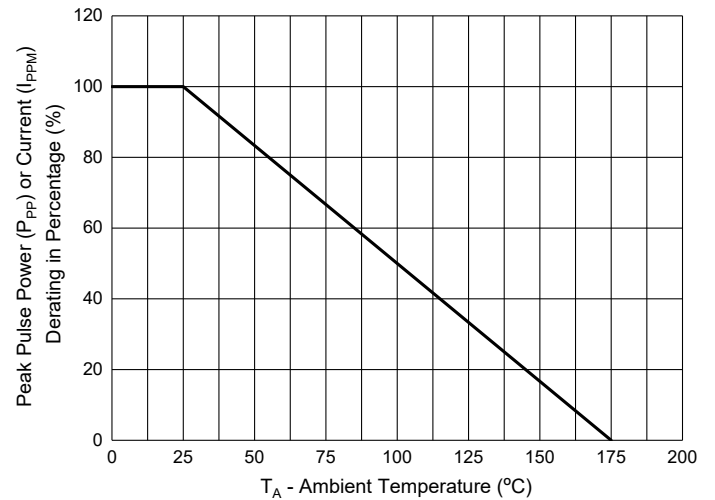

## Ordering Information

Device	Packing
Part Number-TP	Tape&Reel:5Kpcs/Reel

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages. *Micro Commercial Components Corp.* products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.