



SMB15J-A SERIES

Surface Mount Transient Voltage Suppressor

Features


- ★ High reliability application and automotive grade AEC-Q101 qualified
- ★ Glass passivated chip
- ★ 1500W peak pulse power capability at 10/1000 μ s waveform, repetition rate (duty cycles):0.01%
- ★ Low leakage
- ★ Excellent clamping capability
- ★ Very fast response time
- ★ Halogen free and RoHS compliant
- ★ ESD protection of data lines in accordance with IEC 61000-4-2 30kV(Air), 30kV(Contact)
- ★ EFT protection of data lines in accordance with IEC 61000-4-4

Mechanical Data

- ★ Case: Molded plastic, SMB/DO-214AA
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-750, method 2026
- ★ Polarity: Color band denotes cathode end
- ★ Part no. with suffix "-A" means AEC-Q101 qualified

Working Voltage 5.0 to 180 V
Peak Pulse Power 1500W

SMB/DO-214AA

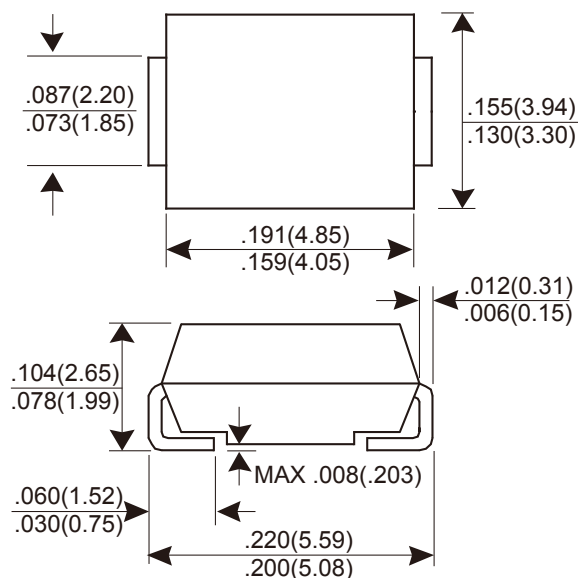

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND THERMAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ unless otherwise noted

PARAMETER	SYMBOL	VALUE	UNIT
Peak power dissipation with a 10/1000 μ s waveform (Note 1,2)	P _{PPM}	1500	W
Peak forward surge current, 8.3 ms single half sine-wave (Note 3)	I _{FSM}	100	A
Power dissipation on infinite heatsink at $T_L=75^\circ\text{C}$	P _D	5.0	W
Maximum instantaneous forward voltage at 50A for unidirectional only	V _F	5.0	V
Typical thermal resistance junction to ambient	R _{θJA}	100	$^\circ\text{C/W}$
Typical thermal resistance junction to lead	R _{θJL}	20	$^\circ\text{C/W}$
Operating junction temperature range	T _J	-65 to +150	$^\circ\text{C}$
Storage temperature range	T _{STG}	-65 to +175	$^\circ\text{C}$

Notes : (1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2

(2) Mounted on copper pad area of 0.2" x 0.2" (5.0 x 5.0mm) to each terminal

(3) Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum

SMB15J-A SERIES

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Device Marking Code		Breakdown Voltage $V_{BR}@I_T$			Maximum Reverse Leakage $I_R@V_{RWM}$ (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current I_{PP} (A)	Maximum Clamping Voltage $V_C@I_{PP}$ (V)
		Uni	Bi	Min (V)	Max (V)	I_T (mA)				
SMB15J5.0A-A	SMB15J5.0CA-A	GDE	BDE	6.40	7.00	10	800	5.0	163.04	9.2
SMB15J6.0A-A	SMB15J6.0CA-A	GDG	BDG	6.67	7.37	10	800	6.0	145.63	10.3
SMB15J6.5A-A	SMB15J6.5CA-A	GDK	BDK	7.22	7.98	10	500	6.5	133.93	11.2
SMB15J7.0A-A	SMB15J7.0CA-A	GDM	BDM	7.78	8.60	10	200	7.0	125.00	12.0
SMB15J7.5A-A	SMB15J7.5CA-A	GDP	BDP	8.33	9.21	1	100	7.5	116.28	12.9
SMB15J8.0A-A	SMB15J8.0CA-A	GDR	BDR	8.89	9.83	1	50	8.0	110.29	13.6
SMB15J8.5A-A	SMB15J8.5CA-A	GDT	BDT	9.44	10.4	1	20	8.5	104.17	14.4
SMB15J9.0A-A	SMB15J9.0CA-A	GDV	BDV	10.0	11.1	1	10	9.0	97.40	15.4
SMB15J10A-A	SMB15J10CA-A	GDY	BDY	11.1	12.3	1	5	10	88.24	17.0
SMB15J11A-A	SMB15J11CA-A	GDZ	BDZ	12.2	13.5	1	1	11	82.42	18.2
SMB15J12A-A	SMB15J12CA-A	GEE	BEE	13.3	14.7	1	1	12	75.38	19.9
SMB15J13A-A	SMB15J13CA-A	GEG	BEG	14.4	15.9	1	1	13	69.77	21.5
SMB15J14A-A	SMB15J14CA-A	GEK	BEK	15.6	17.2	1	1	14	64.66	23.2
SMB15J15A-A	SMB15J15CA-A	GEM	BEM	16.7	18.5	1	1	15	61.48	24.4
SMB15J16A-A	SMB15J16CA-A	GEP	BEP	17.8	19.7	1	1	16	57.69	26.0
SMB15J17A-A	SMB15J17CA-A	GER	BER	18.9	20.9	1	1	17	54.35	27.6
SMB15J18A-A	SMB15J18CA-A	GET	BET	20.0	22.1	1	1	18	51.37	29.2
SMB15J20A-A	SMB15J20CA-A	GEV	BEV	22.2	24.5	1	1	20	46.30	32.4
SMB15J22A-A	SMB15J22CA-A	GEX	BEX	24.4	26.9	1	1	22	42.25	35.5
SMB15J24A-A	SMB15J24CA-A	GEZ	BEZ	26.7	29.5	1	1	24	38.56	38.9
SMB15J26A-A	SMB15J26CA-A	GFE	BFE	28.9	31.9	1	1	26	35.63	42.1
SMB15J28A-A	SMB15J28CA-A	GFG	BFG	31.1	34.4	1	1	28	33.04	45.4
SMB15J30A-A	SMB15J30CA-A	GFK	BFK	33.3	36.8	1	1	30	30.99	48.4
SMB15J33A-A	SMB15J33CA-A	GFM	BFM	36.7	40.6	1	1	33	28.14	53.3
SMB15J36A-A	SMB15J36CA-A	GFP	BFP	40.0	44.2	1	1	36	25.82	58.1
SMB15J40A-A	SMB15J40CA-A	GFR	BFR	44.4	49.1	1	1	40	23.26	64.5
SMB15J43A-A	SMB15J43CA-A	GFT	BFT	47.8	52.8	1	1	43	21.61	69.4
SMB15J45A-A	SMB15J45CA-A	GFV	BFV	50.0	55.3	1	1	45	20.63	72.7
SMB15J48A-A	SMB15J48CA-A	GFX	BFX	53.3	58.9	1	1	48	19.38	77.4
SMB15J51A-A	SMB15J51CA-A	GFZ	BFZ	56.7	62.7	1	1	51	18.20	82.4
SMB15J54A-A	SMB15J54CA-A	GGE	BGE	60.0	66.3	1	1	54	17.22	87.1
SMB15J58A-A	SMB15J58CA-A	GGG	BGG	64.4	71.2	1	1	58	16.03	93.6
SMB15J60A-A	SMB15J60CA-A	GGK	BGK	66.7	73.7	1	1	60	15.50	96.8
SMB15J64A-A	SMB15J64CA-A	GGM	BGM	71.1	78.6	1	1	64	14.56	103.0
SMB15J70A-A	SMB15J70CA-A	GGP	BGP	77.8	86.0	1	1	70	13.27	113.0
SMB15J75A-A	SMB15J75CA-A	GGR	BGR	83.3	92.1	1	1	75	12.40	121.0
SMB15J78A-A	SMB15J78CA-A	GGT	BGT	86.7	95.8	1	1	78	11.90	126.0
SMB15J85A-A	SMB15J85CA-A	GGV	BGV	94.4	104	1	1	85	10.95	137.0
SMB15J90A-A	SMB15J90CA-A	GGX	BGX	100	111	1	1	90	10.27	146.0
SMB15J100A-A	SMB15J100CA-A	GGZ	BGZ	111	123	1	1	100	9.26	162.0
SMB15J110A-A	SMB15J110CA-A	GHE	BHE	122	135	1	1	110	8.47	177.0
SMB15J120A-A	SMB15J120CA-A	GHG	BHG	133	147	1	1	120	7.77	193.0
SMB15J130A-A	SMB15J130CA-A	GHK	BHK	144	159	1	1	130	7.18	209.0
SMB15J150A-A	SMB15J150CA-A	GHM	BHM	167	185	1	1	150	6.17	243.0
SMB15J160A-A	SMB15J160CA-A	GHP	BHP	178	197	1	1	160	5.79	259.0
SMB15J170A-A	SMB15J170CA-A	GHR	BHR	189	209	1	1	170	5.45	275.0
SMB15J180A-A	SMB15J180CA-A	GHT	BHT	200	220	1	1	180	5.14	291.6

Suffix "A" denotes 5% tolerance device.

Add suffix "CA" after part number to specify Bi-directional devices.

For Bi-directional type having V_R of 10 volts and less, the I_R limit is double.

RATINGS AND CHARACTERISTICS CURVES SM15BJ-A SERIES

Fig.1 - Peak Pulse Power Rating Curve

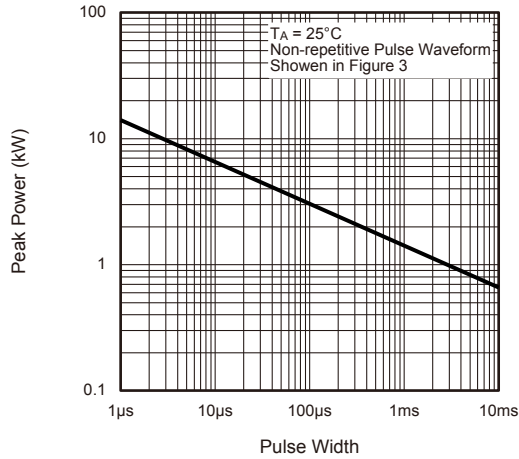


Fig.2 - Pulse Derating Curve

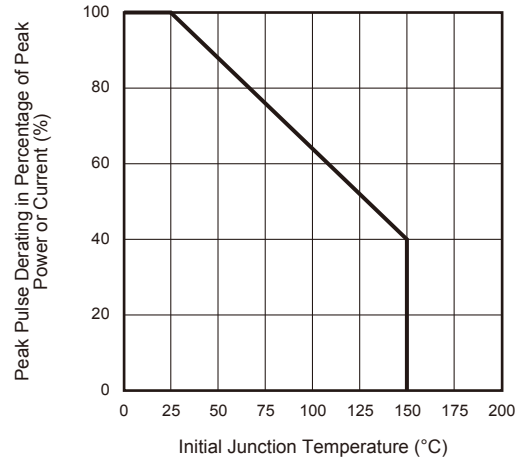


Fig.3 - Pulse Waveform

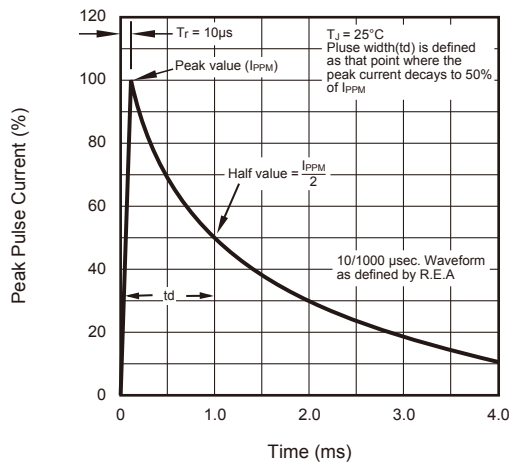


Fig.4 - Typical Junction Capacitance

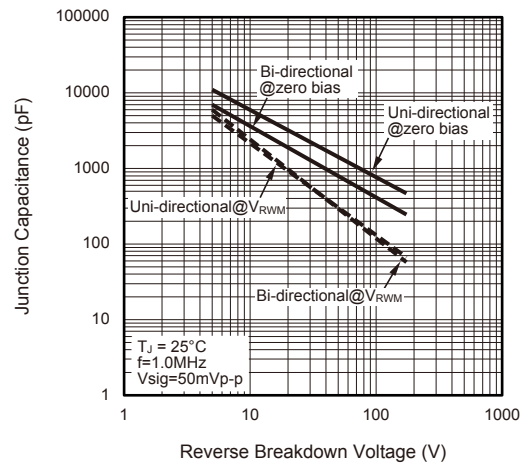


Fig.5 - Steady State Power Derating Curve

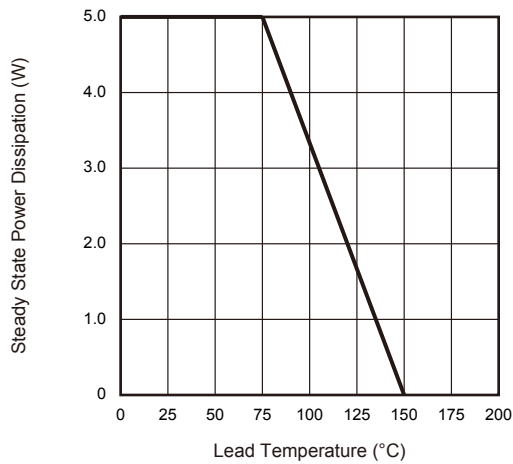


Fig.6 - Maximum Non-Repetitive Surge Current

