


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 9382: UPDATE OVERMOLD ON A FEMALE END	08/30/2018	SLI

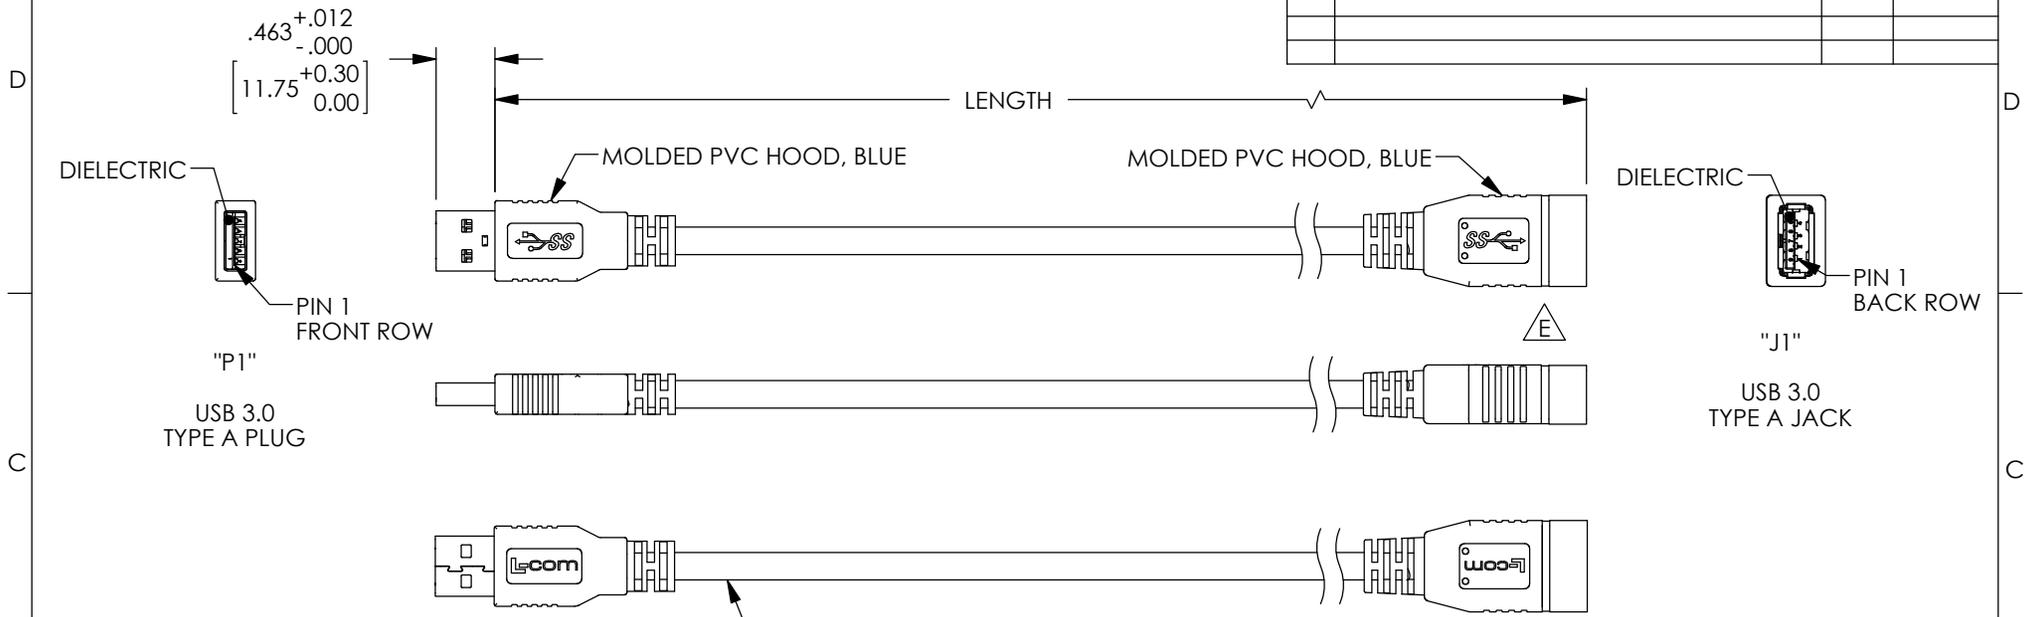

"P1"	WIRING MAP	"J1"
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

UL STYLE 2276
 TWO TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE
 ONE UNSHIELDED TWISTED PAIR, 30AWG.
 TWO CONDUCTORS, 24AWG.
 OVERALL BRAID SHIELD
 JACKET: PVC, BLUE

MODEL NUMBER	LENGTH METERS [FEET]
CAU3AX-03M	0.3 [.98]
CAU3AX-05M	0.5 [1.64]
CAU3AX-075M	0.75 [2.46]
CAU3AX-1M	1.0 [3.28]
CAU3AX-2M	2.0 [6.56]
CAU3AX-3M	3.0 [9.84]

- NOTES:**
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 - CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 - CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
 - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ±.005 [1.27]	APPROVALS	DATE	50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY D. PARHAM CHECKED BY DFRISIELLO APPROVED BY S. SMITH	06/25/2010 06/25/2010 06/29/2010	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION CA, USB 3.0 TYPE A-M TO TYPE A-F	SIZE A
FSCM NO. 43321		DWG. NO. CAU3AX	REV. E
SCALE: NONE		CAD FILE: CAU3AX.SLDDRW	SHEET 1 OF 1