


THIS DOCUMENT AND THE DATA DISCLOSED HEREIN
OR WITHIN IS NOT TO BE REPRODUCED, USED, OR
DISCLOSED IN WHOLE OR PART TO ANYONE WITHOUT
THE WRITTEN PERMISSION OF NEWNEX

CUSTOMER SIGNATURE

DATE _____

COMMENTS:

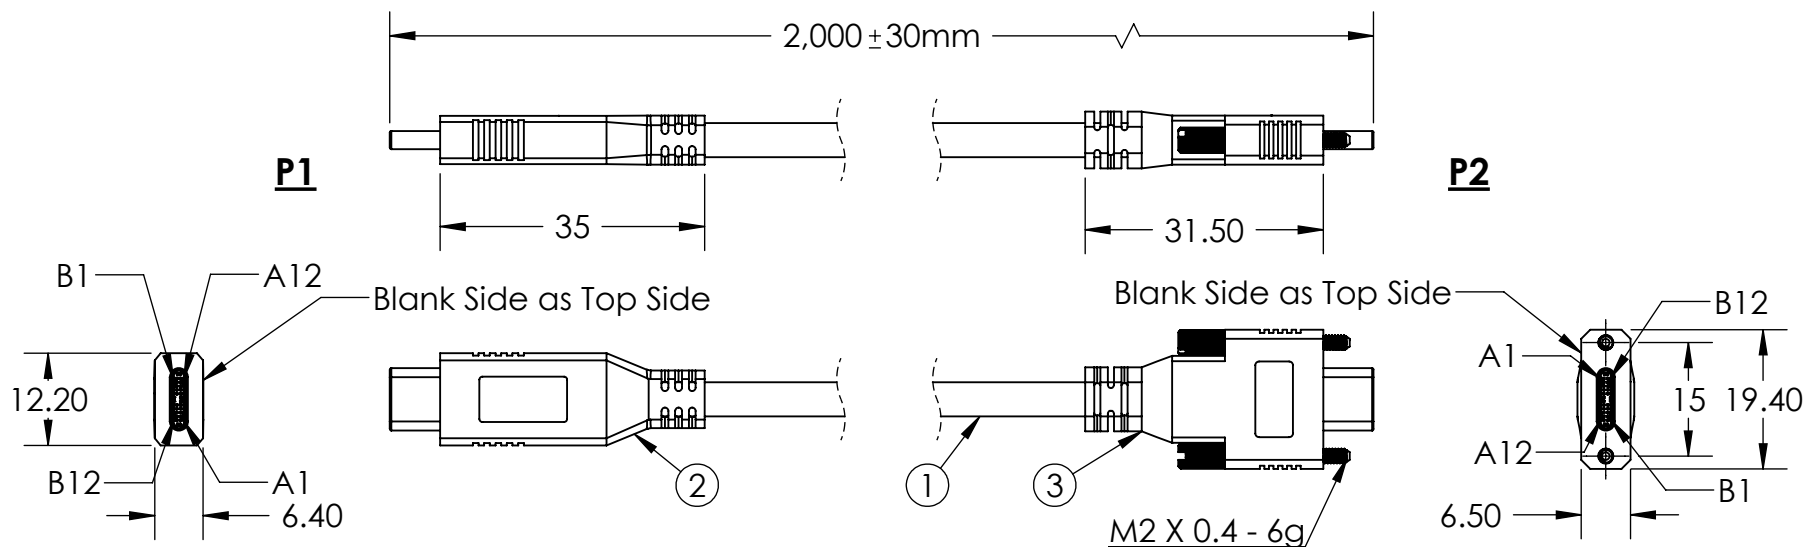

WIRING STRUCTURE

USB Type-C Plug #1		WIRE		USB Type-C Plug #2	
PIN	SIGNAL	Wire Number	SIGNAL	PIN	SIGNAL
A1, B1, A12, B12	GND	1	GND_PWRrt	A1, B1, A12, B12	GND
A4, B4, A9, B9	VBUS	2	PWR_Vbus	A4, B4, A9, B9	VBUS
A5	CC	3	CC	A5	CC
B5	VCONN		NC	B5	VCONN
A6	Dp1	4	UTP_Dp	A6	Dp1
A7	Dn1	5	UTP_Dn	A7	Dn1
A2	SSTXp1	6	SDPp1	B11	SSRXp1
A3	SSTXn1	7	SDPn1	B10	SSRXn1
B11	SSRXp1	8	SDPp2	A2	SSTXp1
B10	SSRXn1	9	SDPn2	A3	SSTXn1
B2	SSTXp2	10	SDPp3	A11	SSRXp2
B3	SSTXn2	11	SDPn3	A10	SSRXn2
A11	SSRXp2	12	SDPp4	B2	SSTXp2
A10	SSRXn2	13	SDPn4	B3	SSTXn2
A8	SBU1	14	SBU_A	B8	SBU2
B8	SBU2	15	SBU_B	A8	SBU1
SHIELD	Shield	Braid	Shield	SHIELD	Shield

*100% OPEN, SHORT, MISWIRE TESTING

*RoHS compliant product

Notes:

1. Cable: USB 3.1 Full Feature Cable.
2. Connector: USB 3.1 Type C Male.
3. Connector: USB 3.1 Type C Male With Duo Screw Locking.
4. Packaging: 1 Piece + PE bag.

Newnex Technology Corp.



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:



	TITLE
--	-------

USB 3.1 C Male Straight to C Male With Duo Screw Locking, 2m, Black.

FRACTIONS	DECIMALS	ANGLES
• NA	.X • 0.5	• 0° 5'
	.XX • 0.25	
	.XXX • 0.125	

SCALE:

REV.	
------	--

[illegible]

Mc

Duo Sc

crew

1

DATE: 10/11/2021

DRAWN BY:

APPROVED BY:

	PART NUMBER
--	-------------

U4S5C01C02-020

	CHECKED BY
--	------------

SHEET 1 OF 1

	REVISION COMMENTS
--	-------------------

Drawing generated