




Connectors > Audio & Video Connectors > USB Connectors

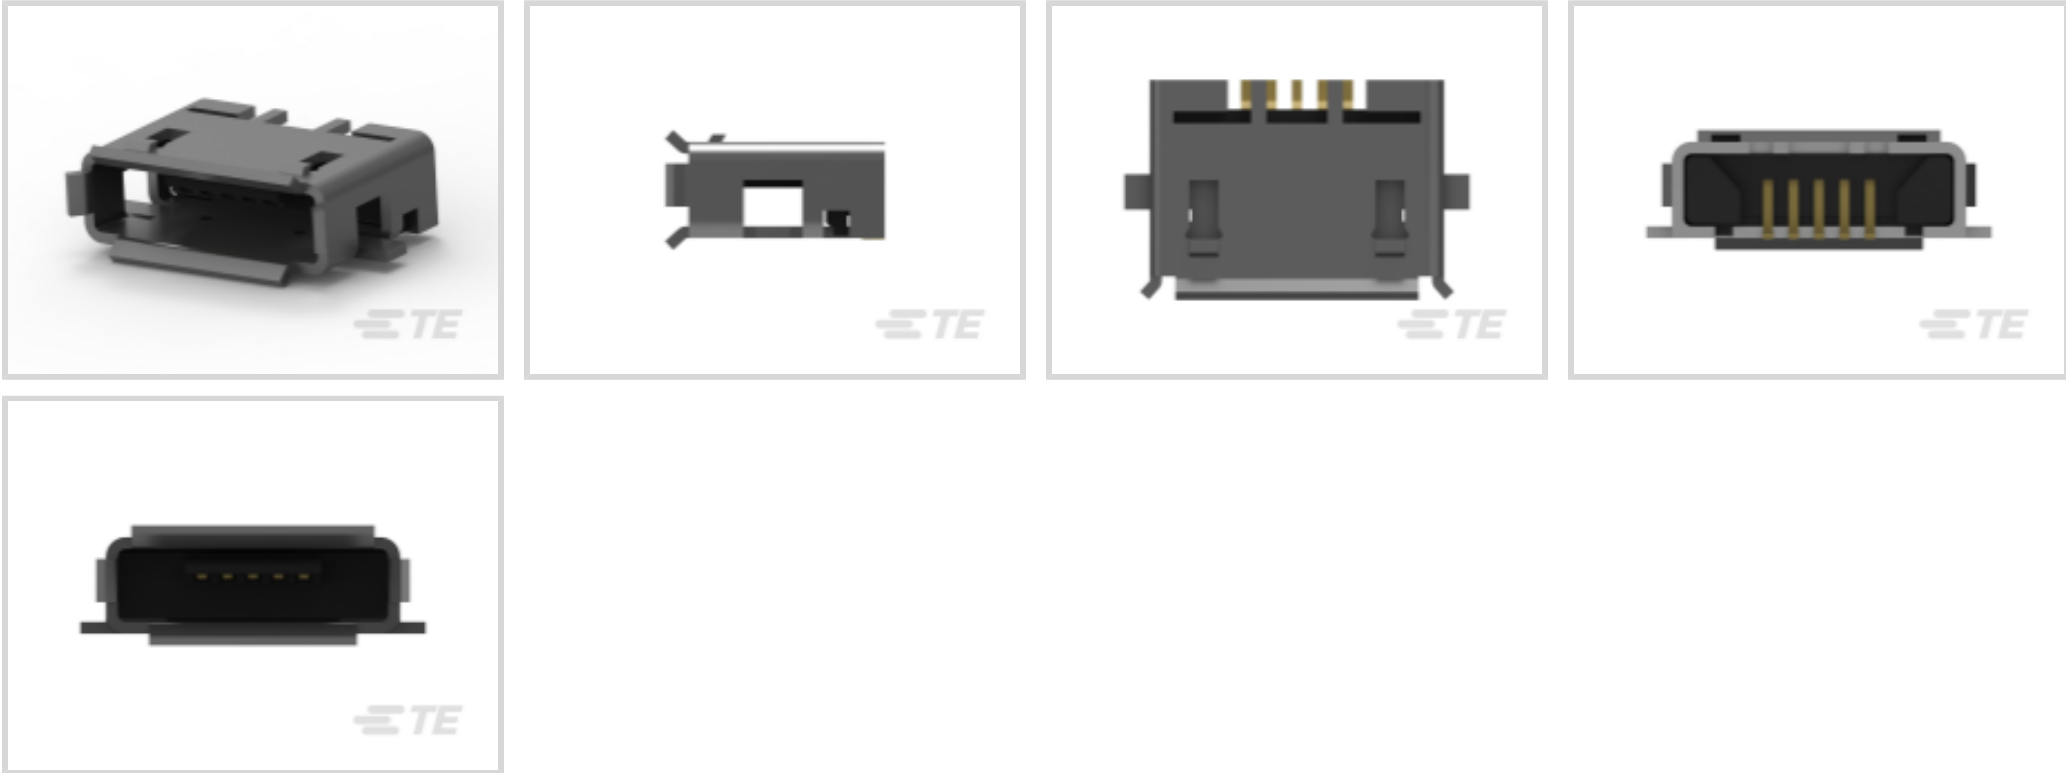

USB Adapter Type: **A/B**

USB Version: **2.0**

Connector Profile: **Micro**

Connector & Housing Type: **Receptacle**

Number of Ports: **1**

Features

Product Type Features

Integral Locking Latch	Without
USB Adapter Type	A/B
USB Version	2.0
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
USB Connector Type	Micro USB 2.0 Type-AB

Configuration Features

Number of Ports	1
Number of Positions	5

Body Features

Offset	0 mm
Shell Plating Finish	Bright
Shell Plating Material	Reflowed Tin over Nickel



Connector Profile	Micro
Contact Features	
Contact Mating Area Plating Material Thickness	.76 µm[29.52 µin]
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	1.8 A
Termination Features	
Termination Post & Tail Length	.75 mm[.03 in]
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
Locking Feature	Without
PCB Mount Location	Top
PCB Connector Seating	Offset
PCB Mount Retention Type	SMT Hold-Down
Panel Mount Feature Type	Flange
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Thermoplastic
Housing Color	Gray
Body Orientation	Right Angle
Centerline (Pitch)	.65 mm[.025 in]
Dimensions	
PCB Thickness (Recommended)	.8 - 1. mm[.031 - .039 in]
Usage Conditions	
Soldering Temperature (Max)	260 °C[500 °F]
Mating Cycles (Max)	10000
Operating Temperature Range	-30 - 85 °C[-22 - 185 °F]
Operation/Application	
Halogen Free	No
Assembly Process Feature	Without Pick and Place Cover
Circuit Application	Power & Signal
Industry Standards	
Test Identification (TID)	60001338



Moisture Sensitivity Level	1
Industry Standard	USB 2.0
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1000
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought




TE Part # 2118310-1
4G World Band, MetaSpan, Tab Mt. PCB



TE Part # 9-1614884-3
CPF 0805 30K 0.1% 25PPM 1K RL



TE Part # 1-1825137-5
A103SYCB04

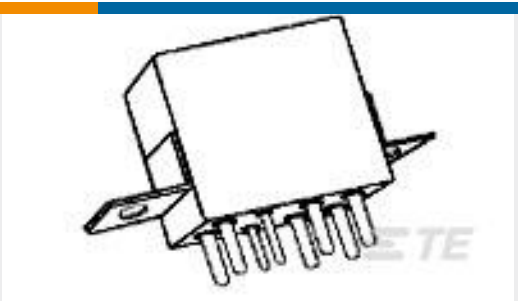

TE Part # 2-1617758-7
FCB-205-0119M=M83536/1-019M



TE Part # 2108517-2
DUAL BAND WiFi ANTENNA, STAMPED METAL,SMD



TE Part # 2343494-1
6POS,TAB0.63X0.63,HDR ASSY, 90DEG,SMD,T



TE Part # C857253001
CLFH-316CK0135

Documents

Product Drawings

MICRO USB, TYPE A/B, GRAY

English

CAD Files

Customer View Model

ENG_CVM_CVM_1981584-1_F.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1981584-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1981584-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Products for Mobile Equipment

English

USB Quick Reference Guide (English)

English

5-1773464-3_Quick_Reference_Guide_Micro_USB_Connectors

English

Product Specifications



Product Specification

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Agency Approvals

UL Report

English