

“ZNR” Surge Absorbers

Type: **SMD**

Series: **VF**



Features

- Large withstanding surge current capability, in compact size
- Designed for flow/reflow solderings
- Low clamping voltage
- RoHS compliant

Recommended Applications

- Protection of communication modules (Modem, xDSL, Terminal Adopter)
- Protection of consumer, industrial equipment
- Absorption of switching surge from relays


Applicable Standards

- PCQC (GB/T10193, GB/T10194)
Registered in "Panasonic Part No."


■ As for Handling Precautions and Minimum Quantity / Packing Unit

Please see Related Information

Explanation of Part Numbers

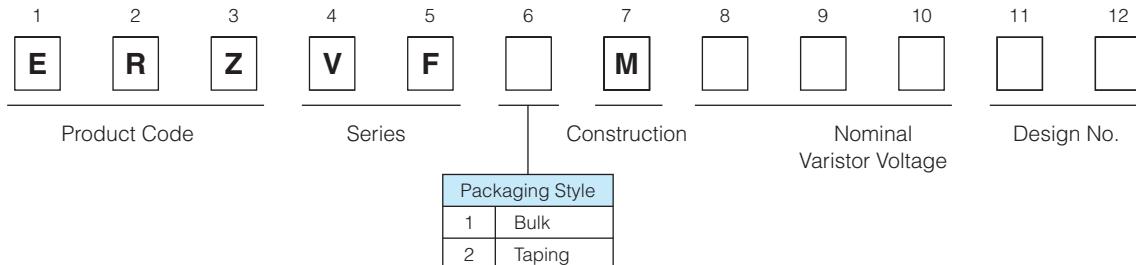


Construction

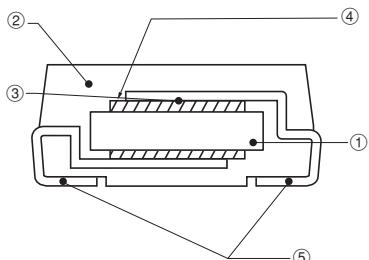

① ZNR element	ZnO etc.
② Resin mold	Epoxy Resin(UL94V-0 approved)
③ Conductive adhesive	Silver
④ Electrode	Silver
⑤ Lead terminals	Sn plated Ni-Fe Alloy

Dimensions in mm (not to scale)

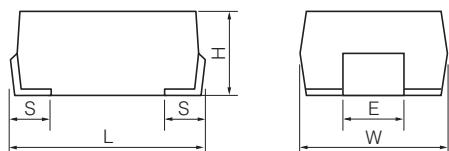

Unit : mm

Part No.	W	L	H	S	E
ERZVF□M□□□	6.0±0.4	8.0±0.5	3.2±0.3	1.3±0.3	2.5±0.2

Ratings and Characteristics

- Operating Temperature Range : -40 to 85 °C
- Storage Temperature Range : -40 to 125 °C


Part No.	Varistor Voltage	Maximum Allowable Voltage		Clamping Voltage at Ip (max.)		Rated Power (W)	Maximum Energy (2 ms) (J)	Maximum Peak Current (8/20 µs, 2 times) (A)
	V _{1 mA} (V)	ACrms (V)	DC (V)	(V)	Measuring Current (A)			
Type VF□M	ERZVF□M220	22(20 to 24)	14	18	43	2.5	0.02	0.9
	ERZVF□M270	27(24 to 30)	17	22	53	2.5	0.02	1.0
	ERZVF□M330	33(30 to 36)	20	26	65	2.5	0.02	1.2
	ERZVF□M390	39(35 to 43)	25	31	77	2.5	0.02	1.5
	ERZVF□M470	47(42 to 52)	30	38	93	2.5	0.02	1.8
	ERZVF□M560	56(50 to 62)	35	45	110	2.5	0.02	2.2
	ERZVF□M680	68(61 to 75)	40	56	135	2.5	0.02	2.5
	ERZVF□M820	82(74 to 90)	50	65	135	10	0.25	3.5
	ERZVF□M101	100(90 to 110)	60	85	165	10	0.25	4.0
	ERZVF□M121	120(108 to 132)	75	100	200	10	0.25	5.0
	ERZVF□M151	150(135 to 165)	95	125	250	10	0.25	6.0
	ERZVF□M201	200(185 to 225)	130	170	340	10	0.25	8.0
	ERZVF□M221	220(198 to 242)	140	180	360	10	0.25	9.0
	ERZVF□M241	240(216 to 264)	150	200	395	10	0.25	10.0
	ERZVF□M271	270(247 to 303)	175	225	455	10	0.25	12.0
	ERZVF□M331	330(297 to 363)	210	270	545	10	0.1	8.0
	ERZVF□M361	360(324 to 396)	230	300	595	10	0.1	9.0
	ERZVF□M391	390(351 to 429)	250	320	650	10	0.1	9.0
	ERZVF□M431	430(387 to 473)	275	350	710	10	0.1	10.0
	ERZVF□M471	470(423 to 517)	300	385	775	10	0.1	10.0

Packaging Style Code: "1" for bulk, "2" for embossed taping


Typical Characteristics

Voltage vs. Current

ERZVF1(2)M220 to ERZVF1(2)M680

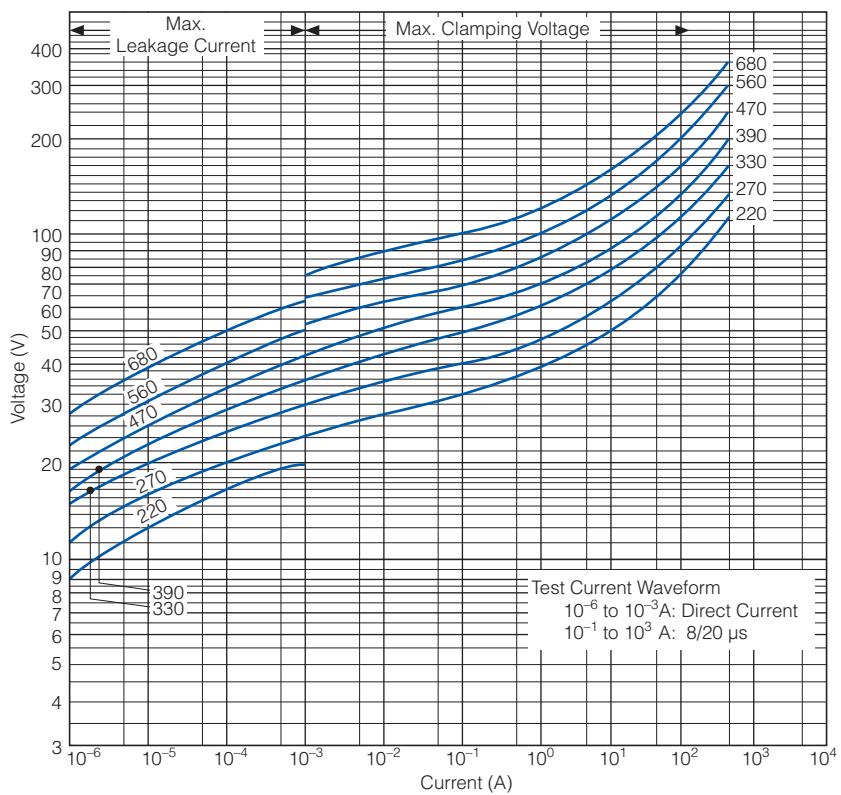


ERZVF1(2)M820 to ERZVF1(2)M471

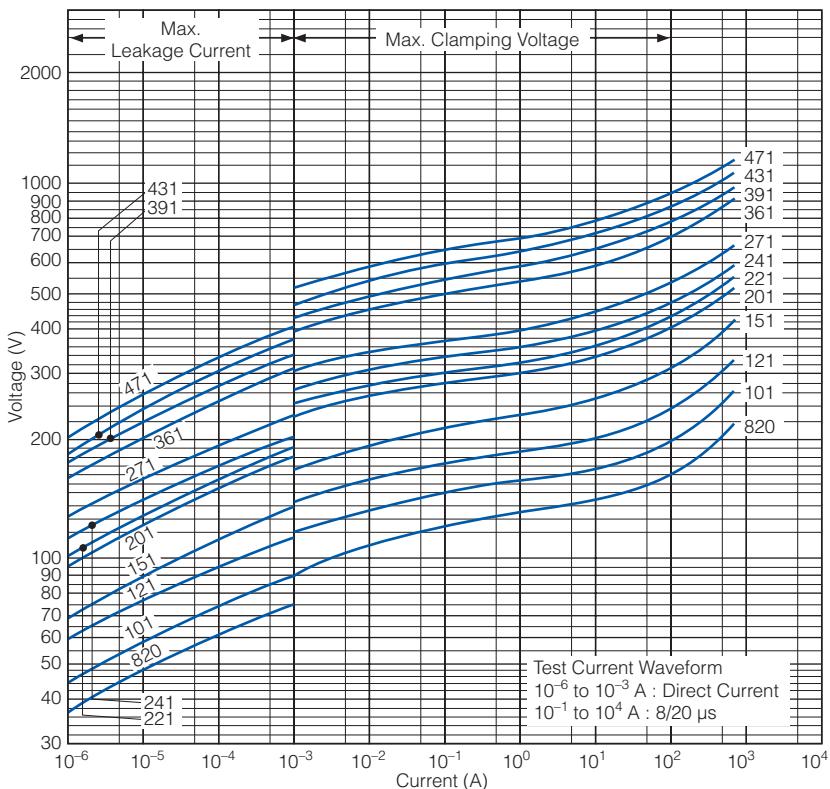


Impulse Derating (Relation between impulse width and impulse current multiple)


ERZVF1(2)M220 to ERZVF1(2)M680

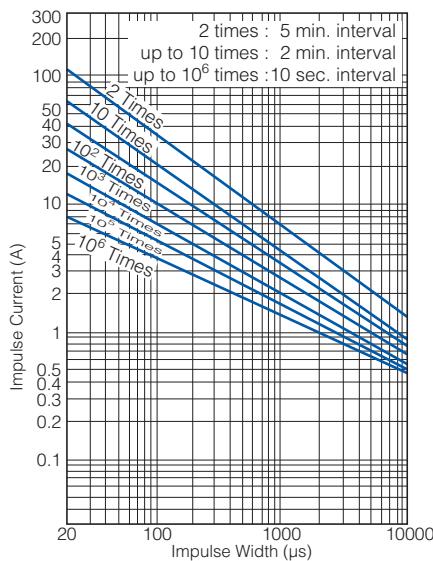


ERZVF1(2)M820 to ERZVF1(2)M271

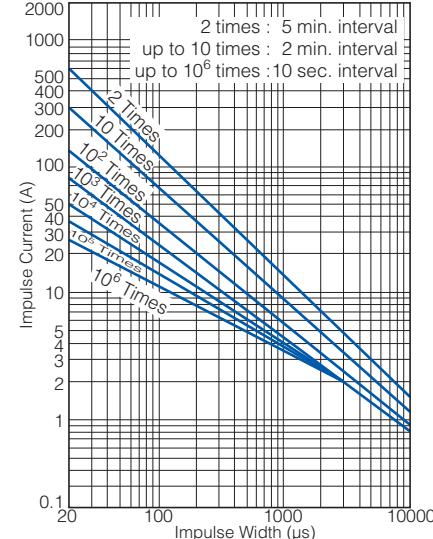

ERZVF1(2)M331 to ERZVF1(2)M471

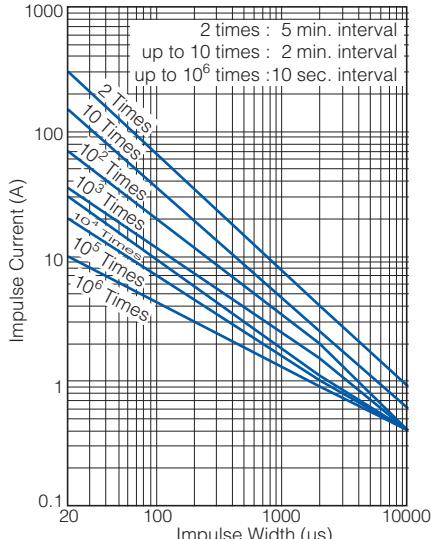

Marking Contents



① Product Name	ZNR, ZNR Surge Absorbers
② Series	VF□M, VF Series
③ Abbreviation of Part No.	The first two digits are significant figures and the third one denotes the number of zeros following.
④ Date Code	Left*(Year) 2011:1, 2012:2, 2013:3, 2014:4, 2015:5, 2016:6 Right(Month) Jan. to Sep.:1 to 9, Oct.:O, Nov.:N, Dec.:D

* If the 10's digit of a Christian year is an even year, as an end abbreviation, an alphabetic character is used.


1 : A, 2 : B, 3 : C, 4 : D, 5 : E, 6 : F, 7 : G, 8 : H, 9 : J, 0 : K
If the 10's digit of a Christian year is an odd year, as an end abbreviation, a number is used.

Packaging Methods

- Packing Quantity

Style	Quantity
Embossed taping	2,000 pcs./reel
Bulk	200 pcs./bag


- Reel

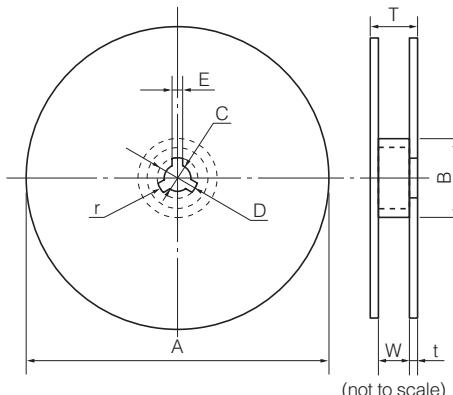

Part No.	A	B	C	D	E
ERZVF□M□□□	382 max.	50 min.	13.0±0.5	21.0±0.8	2.0±0.5

Part No.	W	T	t	r
ERZVF□M□□□	16.4 ^{+2.0} ₀	22.4 max.	2.5±0.5	1.0

- Embossed Taping

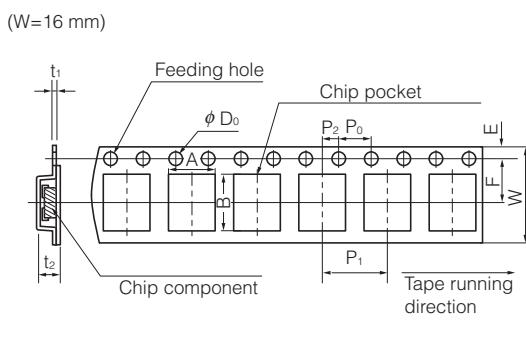


Part No.	A	B	W	F	E	P ₁
ERZVF□M□□□	6.8±0.2	11.9 max.	16.0±0.3	7.5±0.10	1.75±0.10	8.0±0.1

Part No.	P ₂	P ₀	φD ₀	t ₁	t ₂
ERZVF□M□□□	2.0±0.1	4.0±0.1	1.5 ^{+0.1} ₀	0.6 max.	6.5 max.

Performance Characteristics

Characteristics	Test Methods	Specifications												
Standard Test Condition	Electrical measurements (initial/after tests) shall be conducted at temperature of 5 to 35 °C, relative humidity of maximum 85 %	—												
Varistor Voltage	The voltage between two terminals with the specified measuring current 1mA DC applied is called V ₁ or V _{1mA} . The measurement should be made as fast as possible to avoid heat effects.													
Maximum Allowable Voltage	The recommended maximum sinusoidal wave voltage (rms) or the maximum DC voltage that can be applied continuously.													
Clamping Voltage	The maximum voltage between two terminals with the specified impulse current (8/20 µs).	To meet the specified value.												
Rated Power	The maximum power that can be applied within the specified ambient temperature.													
Maximum Energy	Maximum energy of less than ±10 % of the varistor voltage change when the standard impulse (2 ms) is applied one time.													
Maximum Peak Current	Maximum current of less than ±10 % of the varistor voltage change when impulse current (8/20 µs) is applied twice continuously with an interval of 5 minutes.													
Temperature Coefficient of Varistor Voltage	$\frac{V_{1mA} \text{ at } 85^\circ\text{C} - V_{1mA} \text{ at } 25^\circ\text{C}}{V_{1mA} \text{ at } 25^\circ\text{C}} \times \frac{1}{60} \times 100 (\%/\text{°C})$	0 to -0.05 %/°C												
Impulse Life (I)	<p>The change of V_c shall be measured after the specified impulse is applied 10000 times continuously with an interval of 10 seconds at room temperature.</p> <table border="1"> <thead> <tr> <th>Part No.</th> <th>Waveform</th> <th>Current</th> </tr> </thead> <tbody> <tr> <td>ERZVF□M220 to ERZVF□M680</td> <td>8/20 µs</td> <td>18 A</td> </tr> <tr> <td>ERZVF□M820 to ERZVF□M271</td> <td>8/20 µs</td> <td>50 A</td> </tr> <tr> <td>ERZVF□M331 to ERZVF□M471</td> <td>8/20 µs</td> <td>30 A</td> </tr> </tbody> </table>	Part No.	Waveform	Current	ERZVF□M220 to ERZVF□M680	8/20 µs	18 A	ERZVF□M820 to ERZVF□M271	8/20 µs	50 A	ERZVF□M331 to ERZVF□M471	8/20 µs	30 A	$\Delta V_{1mA}/V_{1mA} \leq \pm 10 \%$
Part No.	Waveform	Current												
ERZVF□M220 to ERZVF□M680	8/20 µs	18 A												
ERZVF□M820 to ERZVF□M271	8/20 µs	50 A												
ERZVF□M331 to ERZVF□M471	8/20 µs	30 A												
Impulse Life (II)	<p>The change of V_c shall be measured after the specified impulse is applied 100000 times continuously with an interval of 10 seconds at room temperature.</p> <table border="1"> <thead> <tr> <th>Part No.</th> <th>Waveform</th> <th>Current</th> </tr> </thead> <tbody> <tr> <td>ERZVF□M220 to ERZVF□M680</td> <td>8/20 µs</td> <td>12 A</td> </tr> <tr> <td>ERZVF□M820 to ERZVF□M271</td> <td>8/20 µs</td> <td>35 A</td> </tr> <tr> <td>ERZVF□M331 to ERZVF□M471</td> <td>8/20 µs</td> <td>20 A</td> </tr> </tbody> </table>	Part No.	Waveform	Current	ERZVF□M220 to ERZVF□M680	8/20 µs	12 A	ERZVF□M820 to ERZVF□M271	8/20 µs	35 A	ERZVF□M331 to ERZVF□M471	8/20 µs	20 A	$\Delta V_{1mA}/V_{1mA} \leq \pm 10 \%$
Part No.	Waveform	Current												
ERZVF□M220 to ERZVF□M680	8/20 µs	12 A												
ERZVF□M820 to ERZVF□M271	8/20 µs	35 A												
ERZVF□M331 to ERZVF□M471	8/20 µs	20 A												

Recommendation Land Size

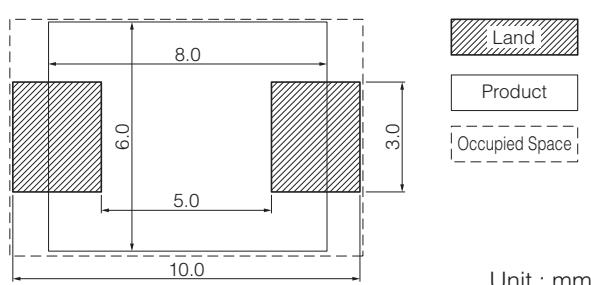

Unit : mm