


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	ECN 11699: ADD TEMPERATURE RATING	03/03/2022	DGUST

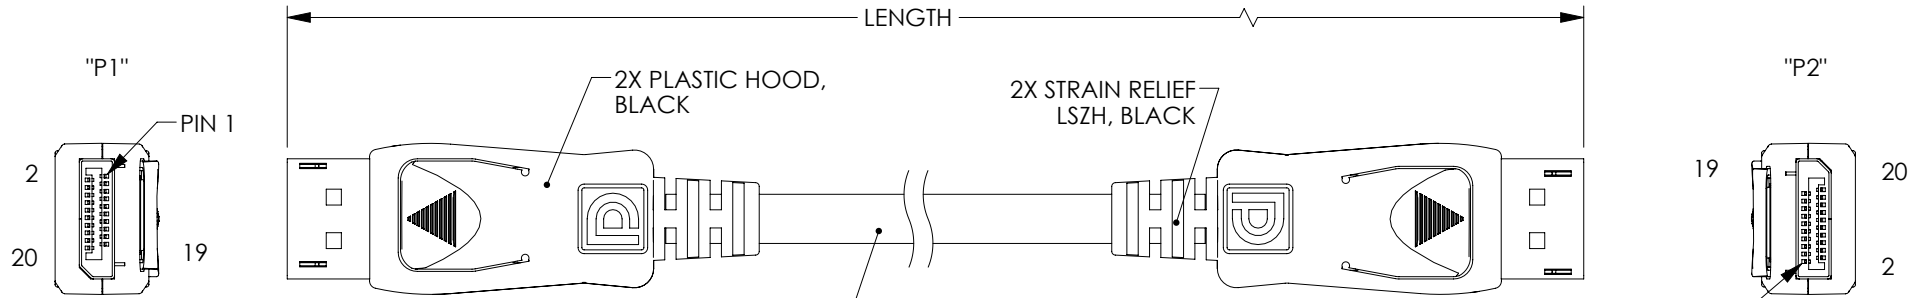

UL 21118,  
 (5) SHIELDED TWISTED PAIRS 30AWG, TINNED COPPER EACH WITH 30AWG DRAIN WIRE  
 (4) SINGLE CONDUCTORS 30AWG, TINNED COPPER WITH OVERALL ALUM/POLY FOIL SHIELD AND TINNED COPPER BRAID  
 JACKET: LOW SMOKE ZERO HALOGEN, BLACK  
 (NOM. DIA: .256" [6.50], MIN. BEND RAD: 2.56" [65.0])

WIRING MAP				
CABLE	"P1"	SIGNAL NAME	COLOR	"P2"
TWISTED PAIR 1	1	ML_LANE 0(p)	BROWN	12
	2	GND	DRAIN	11
	3	ML_LANE 0(n)	WHITE	10
TWISTED PAIR 2	4	ML_LANE 1(p)	RED	9
	5	GND	DRAIN	8
TWISTED PAIR 3	6	ML_LANE 1(n)	WHITE	7
	7	ML_LANE 2(p)	GREEN	6
TWISTED PAIR 4	8	GND	DRAIN	5
	9	ML_LANE 2(n)	WHITE	4
TWISTED PAIR 5	10	ML_LANE 3(p)	ORANGE	3
	11	GND	DRAIN	2
	12	ML_LANE 3(n)	WHITE	1
	13	GND	BROWN	13
	14	GND	RED	14
TWISTED PAIR 5	15	AUX CH(p)	BLUE	15
	16	GND	DRAIN	16
	17	AUX CH(n)	WHITE	17
	18	HOT PLUG DETECT	YELLOW	18
	19	DP_PWR RETURN	ORANGE	19
	20	N/A	N/C	20
	SHELL	GND	BRAID	SHELL

MODEL NUMBER	LENGTH	
	METERS	FEET
DPCAZMM-0.5	0.5	1.64
DPCAZMM-1	1.0	3.28
DPCAZMM-2	2.0	6.56
DPCAZMM-3	3.0	9.84

**NOTES:**

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
- TEMPERATURE RATING: -10° TO +80°.

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY S.LI APPROVED BY S.SMITH	DATE 06/10/2014 07/22/2014 07/22/2014		50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY <b>AUDIO/VIDEO</b>	PRODUCT DESCRIPTION <b>CA DISPLAYPORT M/M LSZH</b>	
	THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b> CAGE CODE <b>43321</b> SCALE: NONE	DWG. NO. <b>DPCAZMM-X</b> CAD FILE: DPCAZMM-X.SLDDRW	REV. <b>C</b> SHEET 1 OF 1