

## PIDG

TE Internal #: 2-323994-1 Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm<sup>2</sup> Wire Size, Serrated, .202 – .81 kcmil Wire Size, 202 – 810 CMA Wire Size, Copper, PIDG

## View on TE.com >

Terminals & Splices > Splices > PIDG Butt Splices



Splice Type: Butt Splice

Wire Size: .12 – .4 mm<sup>2</sup>

Sealable: No

Splice Features: Serrated

All PIDG Butt Splices (25)

## Features

## **Product Type Features**

Splice Accessory Type

Splice Type

Splice

Butt Splice



Sealable	No
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Serrations	8
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Insulation Material	Copper, Nylon
Product Weight	.411 g
Splice Features	Serrated
Primary Product Color	Yellow - Translucent
Contact Features	
Terminal Plating Material	Tin
Contact Base Material	Copper

**C** For support call+1 800 522 6752

## 2-323994-1

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm<sup>2</sup> Wire Size, Serrated, .202 – . 81 kcmil Wire Size, 202 – 810 CMA Wire Size, Copper, PIDG



Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	202 – 810 CMA
Compatible Insulation Diameter Range	2.08 mm[.082 in]
Terminal Material Thickness	.38 mm[.015 in]
Product Length	22.61 mm[.89 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	105 °C[221 °F]
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	4000
Packaging Method	Tape Mounted

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these

## 2-323994-1

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm<sup>2</sup> Wire Size, Serrated, .202 – . 81 kcmil Wire Size, 202 – 810 CMA Wire Size, Copper, PIDG



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



# Also in the Series | PIDG




Compression Connectors(17)	Crimp Terminal Housings(1)	Crimp Wire Pins, Tabs & Ferrules(41)	Hand Crimping Tools(2)
Knife Disconnects(11)	PCB Terminals(5)	Quick Disconnects(47)	Ring Terminals(589)
Spade Terminals(230)	Special Purpose Terminals(1)	Splices(43)	

#### 2-323994-1

Splices, Butt Splice, 26 – 22 AWG Wire Size, .12 – .4 mm<sup>2</sup> Wire Size, Serrated, .202 – . 81 kcmil Wire Size, 202 – 810 CMA Wire Size, Copper, PIDG



# Customers Also Bought

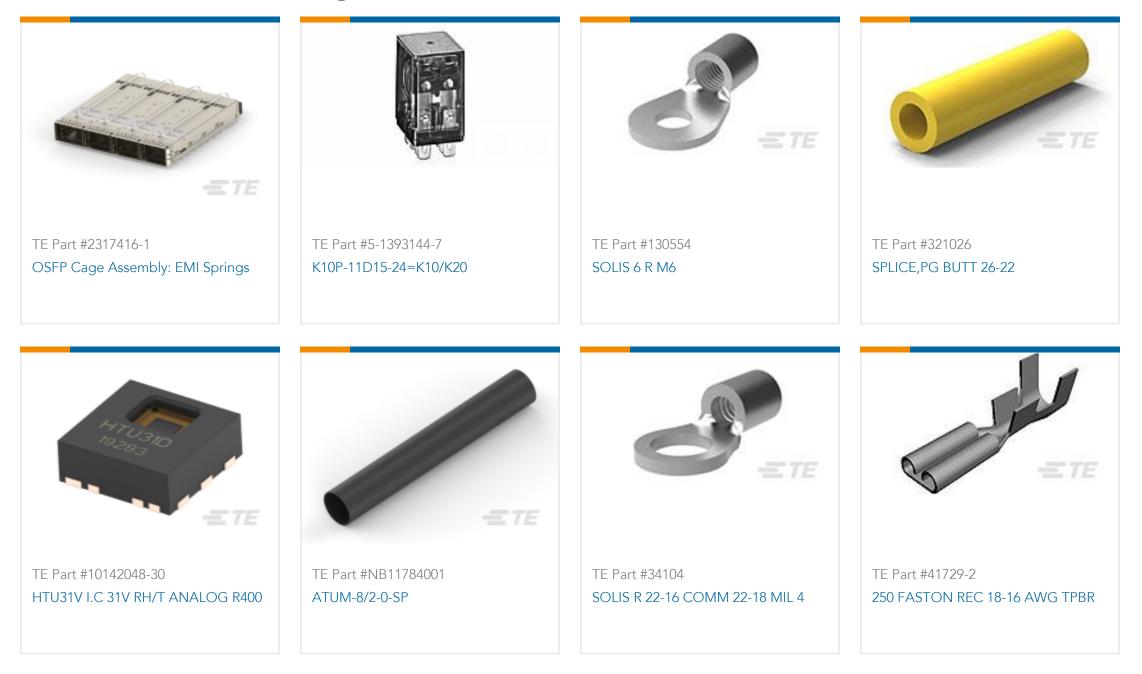

## Documents

Product Drawings PIDG BUTT SPLC WDW 26-22; TAPE

English

CAD Files

# 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_2-323994-1\_Y.2d\_dxf.zip

English

Customer View Model ENG\_CVM\_CVM\_2-323994-1\_Y.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_2-323994-1\_Y.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages PIDG Terminals and Splices Quick Reference Guide

English

Standard Terminals & Splices

English