

TE Internal #: 328307 Splices, Closed End Splice, Serrated, .509 - 3.248 kcmil Wire Size, 509 - 3248 CMA Wire Size, Copper, Red, 12 Serration, Length .445 in [11.3 mm]

#### View on TE.com >

**E** 

Terminals & Splices > Splices



Splice Type: Closed End Splice

Sealable: No

Splice Features: Serrated

Wire Size: 509 - 3248 CMA

Features

**Product Type Features** 

Splice Accessory Type	Wire Cap
Splice Type	Closed End Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Serrations	12
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Insulation Type	Pre-Insulated
Insulation Material	Nylon
Splice Features	Serrated
Primary Product Color	Red
Contact Features	
Military Part Class	Class I

Splices, Closed End Splice, Serrated, .509 - 3.248 kcmil Wire Size, 509 - 3248 CMA Wire Size, Copper, Red, 12 Serration, Length .445 in [11.3 mm]



Contact Base Material	Copper
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Wire Size	509 - 3248 CMA
Terminal Material Thickness	.61 mm[.024 in]
Product Length	11.3 mm[.445 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operating Temperature Range	105 °C[221 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	Yes
Packaging Features	
Packaging Quantity	1000

Packaging Method

Loose Piece

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

Splices, Closed End Splice, Serrated, .509 - 3.248 kcmil Wire Size, 509 - 3248 CMA Wire Size, Copper, Red, 12 Serration, Length .445 in [11.3 mm]



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

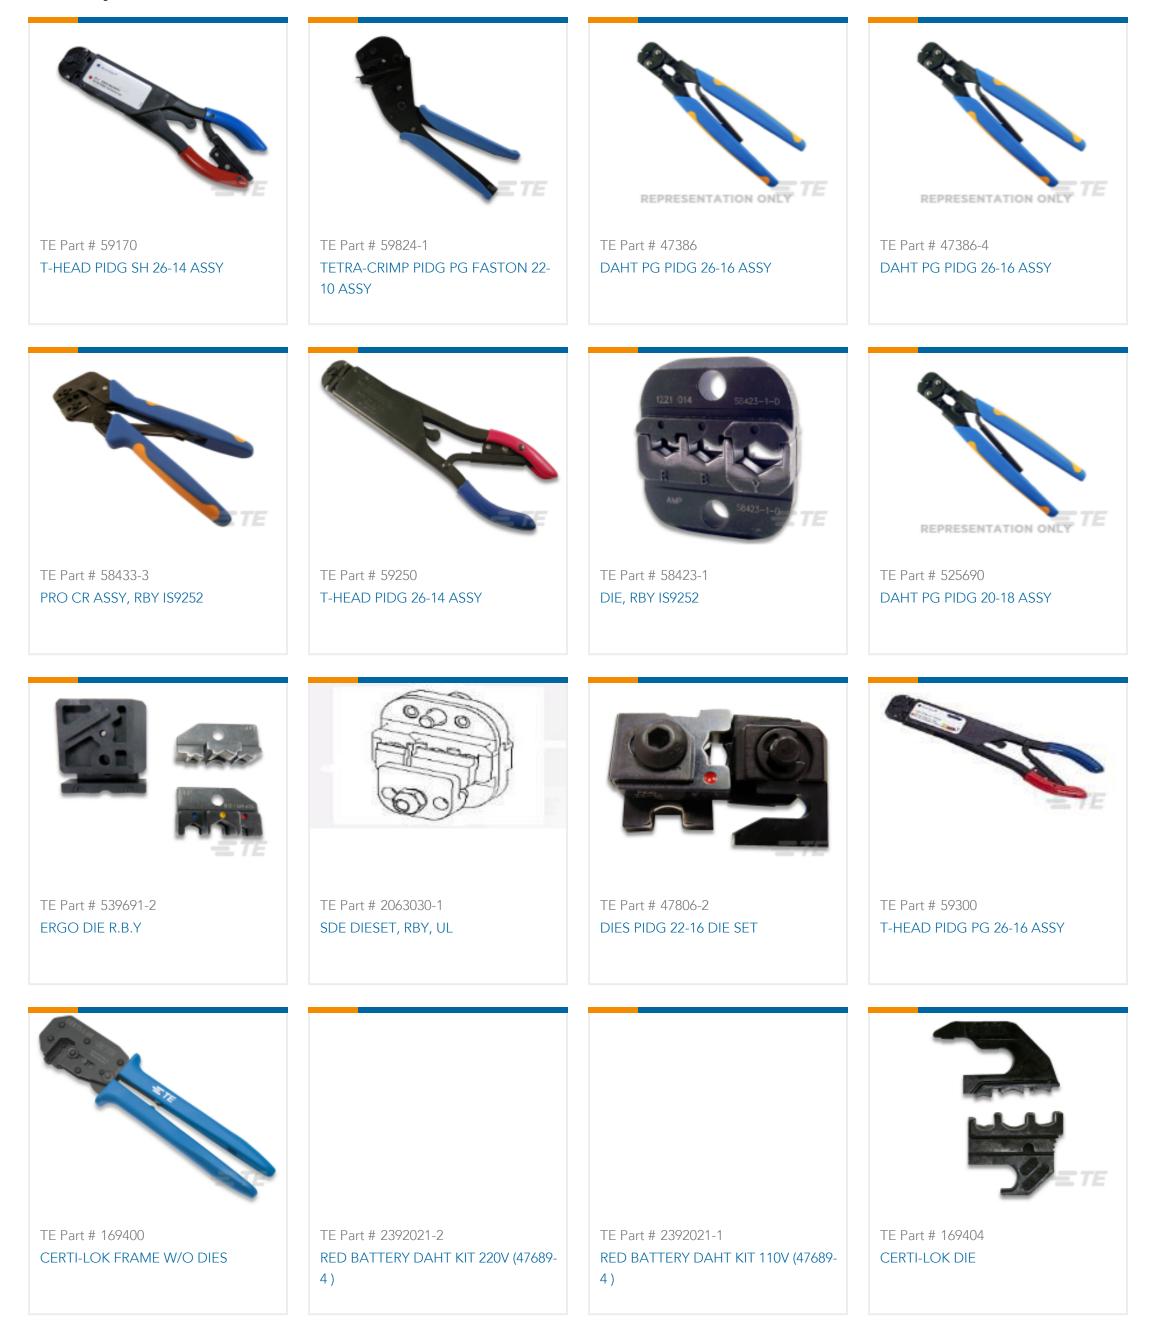

Splices, Closed End Splice, Serrated, .509 - 3.248 kcmil Wire Size, 509 - 3248 CMA Wire Size, Copper, Red, 12 Serration, Length .445 in [11.3 mm]





# **Customers Also Bought**



SPARE WIRE	CAP,BLU,	10-14 AVVG
------------	----------	------------

I LINIMAL IN FIDO FLER STRATO IN
AWG

## Documents

**Product Drawings** SPARE WIRE CAP, RED 22-18 AWG

English

## CAD Files

#### 3D PDF

English

**Customer View Model** ENG\_CVM\_328307\_F.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_328307\_F.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_328307\_F.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Splices, Closed End Splice, Serrated, .509 - 3.248 kcmil Wire Size, 509 - 3248 CMA Wire Size, Copper, Red, 12 Serration, Length .445 in [11.3 mm]



Instruction Sheets Instruction Sheet (U.S.)

English