



SPLICE

TE Internal #: 60933-2  
Splices, Pigtail Splice / Thru Splice, 2200 - 2900 CMA Wire Size,  
Steel, 0 Serration, Length .157 in [3.99 mm], Reel, Open, SPLICE  
[View on TE.com >](#)

Terminals & Splices > Splices



Splice Type: Pigtail Splice, Thru Splice  
Sealable: No  
Wire Size: 2200 - 2900 CMA  
Contact Base Material: Steel  
Terminal Material Thickness: .3 mm [ .012 in ]

Features

Product Type Features

Splice Type	Pigtail Splice, Thru Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Serrations	0
Compatible With Wire & Cable Type	Discrete Wire

Body Features

Product Weight	.035 g
----------------	--------

Contact Features

Contact Base Material	Steel
Barrel Type	Open

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------



Dimensions

Wire Size	2200 - 2900 CMA
Terminal Material Thickness	.3 mm[.012 in]
Product Length	3.99 mm[.157 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 - 250 °C[-40 - 482 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Splice	No
-----------------------------	----

Packaging Features

Packaging Quantity	100000
Packaging Method	Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability











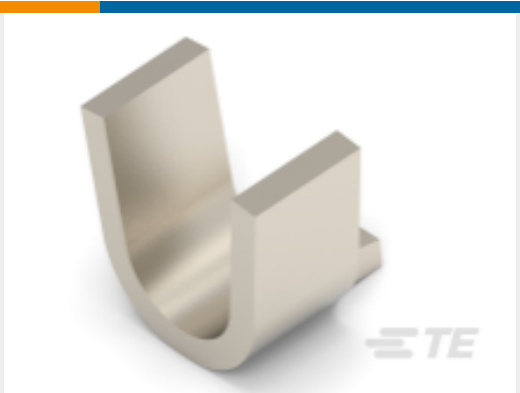
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 <div>TE Part # 61299-1 SPLICE 7000-12500 .031 TPST</div>	 <div>TE Part # 42329-1 SPLICE 1200-2600 .012 NPST</div>	 <div>TE Part # 60932-2 SPLICE 2500-4700 .020 TPST</div>	 <div>TE Part # 485020-1 SPLICE 6000-8000 .020 TPST</div>
 <div>TE Part # 61021-1 SPLICE 18-16 AWG .0126 NPST</div>	 <div>TE Part # 61300-1 SPLICE IS 10000-16000 .031 TPST</div>	 <div>TE Part # 63414-1 SPLICE 9000-16000 .031 TPST</div>	 <div>TE Part # 41215 SPLICE 2200-4500 CMA NPSTL</div>
 <div>TE Part # 41627-1 SPLICE 4000-10000 .025 ST</div>	 <div>TE Part # 61008-1 SPLICE 18-16 AWG .0158 TPST</div>	 <div>TE Part # 160659-2 SPLICE 800-2500 .016 NPST</div>	

Also in the Series | SPLICE

 <div>Crimp Wire Pins, Tabs &amp; Ferrules(1)</div>	 <div>Splices(64)</div>
--	---

Customers Also Bought



TE Part # 776280-1  
8POS, PIN DIA 1.3, HDR ASSY, 90DEG, COD 1

TE Part # 184140-1  
WIRE SEAL, RUBBER, SENSOR, ORANGE

TE Part # 173707-1  
E-J MK-2 070 REC CONT LP

TE Part # 2-964286-1  
JPT A REC 2.8 Contact SWS Au

TE Part # YDTS20W13-35SAV001  
RECP ASSY

TE Part # NB16042001  
RT-375-3/16-X-STK

TE Part # NB19392001  
RNF-100-3/16-BK-STK

TE Part # 1-936124-2  
14POS MQS REC

TE Part # MS27488-20-2  
SEALING PLUGS

TE Part # 184058-1  
12 POS. PLUG DLP

Documents

Product Drawings

SPLICE 2200-2900 .012 TPST

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_60933-2\_L\_c-60933-2-l.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_60933-2\_L\_c-60933-2-l.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_60933-2\_L\_c-60933-2-l.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English