
63625-2 - ACTIVE

SPLICE

TE Internal #: 63625-2 Splices, Thru Splice / Pigtail Splice, 13 - 8 AWG Wire Size, 2.5 - 8.1 mm² Wire Size, 5000 - 16000 CMA Wire Size, Brass, 0 Serration, SPLICE

View on TE.com >

Terminals & Splices > Splices

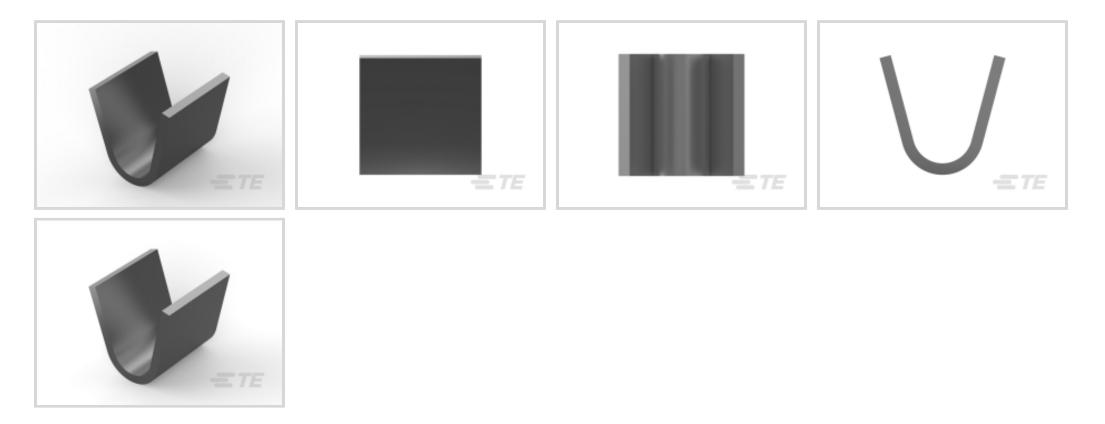

Splice Type: Pigtail Splice, Thru Splice

Wire Size: 5000 - 16000 CMA

Sealable: No

Features

Product Type Features



Splice Type	Pigtail Splice, Thru Splice
Sealable	No
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Number of Serrations	0
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Product Weight	.513 g[.018 oz]
Contact Features	
Contact Base Material	Brass
Barrel Type	Open
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	

63625-2

Splices, Thru Splice / Pigtail Splice, 13 - 8 AWG Wire Size, 2.5 - 8.1 mm² Wire Size, 5000 - 16000 CMA Wire Size, Brass, 0 Serration, SPLICE



Wire Size	5000 - 16000 CMA
Terminal Material Thickness	.64 mm[.025 in]
Product Length	6.78 mm[.267 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No
Packaging Features	
Packaging Quantity	3500
Packaging Method	Strip
Product Compliance	
For compliance documentation, visit the product page on TE.com>	

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

63625-2

Splices, Thru Splice / Pigtail Splice, 13 - 8 AWG Wire Size, 2.5 - 8.1 mm² Wire Size, 5000 - 16000 CMA Wire Size, Brass, 0 Serration, SPLICE



requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



TE Part # 160660-2 SPLICE 22-18 AWG .013 TPBR



TE Part # 2836971-1 OCEAN_2.0_Applicator-S-180F-RSM



TE Part # 2836971-2 OCEAN_2.0_Applicator-S-180F-RSA



OCEAN_2.0_SPARE_PART_KIT-180F



TE Part # 7-2836971-2 OCEAN_2.0_Applicator-S-180F

Also in the Series | SPLICE






Customers Also Bought



63625-2

Splices, Thru Splice / Pigtail Splice, 13 - 8 AWG Wire Size, 2.5 - 8.1 mm² Wire Size, 5000 - 16000 CMA Wire Size, Brass, 0 Serration, SPLICE



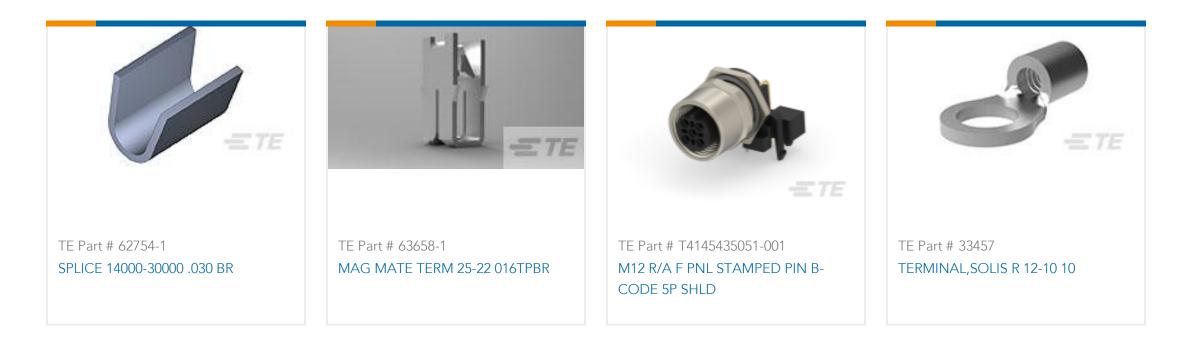

Documents

Product Drawings SPLICE 5000 -16000 .025 TPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_63625-2_H_c-63625-2-h.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_63625-2_H_c-63625-2-h.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_63625-2_H_c-63625-2-h.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Product Specifications Application Specification

English