**3-282836-2** ✓ ACTIVE

## Buchanan

TE Internal #: 3-282836-2 PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .197 in [5 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 - 16 AWG Wire Size

#### View on TE.com >

Connectors > Terminal Blocks & Strips > PCB Terminal Blocks



Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 5 mm [.197 in ]

Number of Rows: 1

# Features

connectivity

## Product Type Features

Wire Protection	With
Terminal Block Connector Type	Header
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Wire Entry Location	Side
Stacking Configuration	Side Stackable
Number of Positions	4
Number of Rows	1
Wire Entry Angle	90°
Electrical Characteristics	
Operating Voltage	300 VAC
Body Features	
Primary Product Color	Green

**C** For support call +1 800 522 6752

## 3-282836-2

PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .197 in [5 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 - 16 AWG Wire Size



Product Orientation	Vertical
Contact Features	
Contact Mating Area Plating Material	Tin
Contact Base Material	Brass
Contact Current Rating (Max)	13.5 A
Termination Features	
Termination Post & Tail Length	3.5 mm[.138 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Screw Plating Material	Nickel
Screw Material	Brass
Thread Size	M3
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	PA 66
Centerline (Pitch)	5 mm[.197 in]

#### Dimensions

Operating Temperature Range -40 - 110 °C[-40 - 230 °F]   Operation/Application Power & Signal   Circuit Application Power & Signal   Packaging Features 150   Packaging Method Package		
Operating Temperature Range -40 - 110 °C[-40 - 230 °F]   Operation/Application Power & Signal   Circuit Application Power & Signal   Packaging Features 150   Packaging Method Package   Product Compliance Package on TE.com>   EU RoHS Directive 2011/65/EU Compliant with Exemptions   EU EUV Directive 2000/53/EC Compliant with Exemptions	Wire Size	.05 - 1.3 mm²
Operation/Application Power & Signal   Circuit Application Power & Signal   Packaging Features 150   Packaging Method Package   Packaging Method Package   Product Compliance For compliance documentation, visit the product page on TE.com>   EU RoHS Directive 2011/65/EU Compliant with Exemptions   EU LV Directive 2000/53/EC Compliant with Exemptions	Usage Conditions	
Circuit Application Power & Signal   Packaging Features 150   Packaging Method Package   Product Compliance Package   For compliance documentation, visit the product page on TE.com> Compliant with Exemptions   EU ROHS Directive 2011/65/EU Compliant with Exemptions	Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Packaging Features 150   Packaging Method Package   Product Compliance Package   For compliance documentation, visit the product page on TE.com> Compliant with Exemptions   EU RoHS Directive 2011/65/EU Compliant with Exemptions   EU ELV Directive 2000/53/EC Compliant with Exemptions	Operation/Application	
Packaging Quantity 150   Packaging Method Package   Product Compliance Package   For compliance documentation, visit the product page on TE.com> Compliant with Exemptions   EU RoHS Directive 2011/65/EU Compliant with Exemptions   EU ELV Directive 2000/53/EC Compliant with Exemptions	Circuit Application	Power & Signal
Packaging Method Package   Product Compliance Product Compliance   For compliance documentation, visit the product page on TE.com> Compliant with Exemptions   EU RoHS Directive 2011/65/EU Compliant with Exemptions   EU ELV Directive 2000/53/EC Compliant with Exemptions	Packaging Features	
Product Compliance   For compliance documentation, visit the product page on TE.com>   EU RoHS Directive 2011/65/EU Compliant with Exemptions   EU ELV Directive 2000/53/EC Compliant with Exemptions	Packaging Quantity	150
For compliance documentation, visit the product page on TE.com>   EU RoHS Directive 2011/65/EU Compliant with Exemptions   EU ELV Directive 2000/53/EC Compliant with Exemptions	Packaging Method	Package
EU ELV Directive 2000/53/EC Compliant with Exemptions	-	
	EU RoHS Directive 2011/65/EU	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016 Restricted Materials Above Threshold	EU ELV Directive 2000/53/EC	Compliant with Exemptions
	China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

### 3-282836-2

PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .197 in [5 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 - 16 AWG Wire Size



Current ECHA Candidate List: JAN 2024 EU REACH Regulation (EC) No. 1907/2006 (240)Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (.7% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free Wave solder capable to 265°C Solder Process Capability

#### Halogen Content

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# Compatible Parts




# **Customers Also Bought**



### 3-282836-2

PCB Terminal Blocks, Header, Wire-to-Board, 4 Position, .197 in [5 mm] Centerline, 1 Row, 90° Wire Entry Angle, 30 - 16 AWG Wire Size



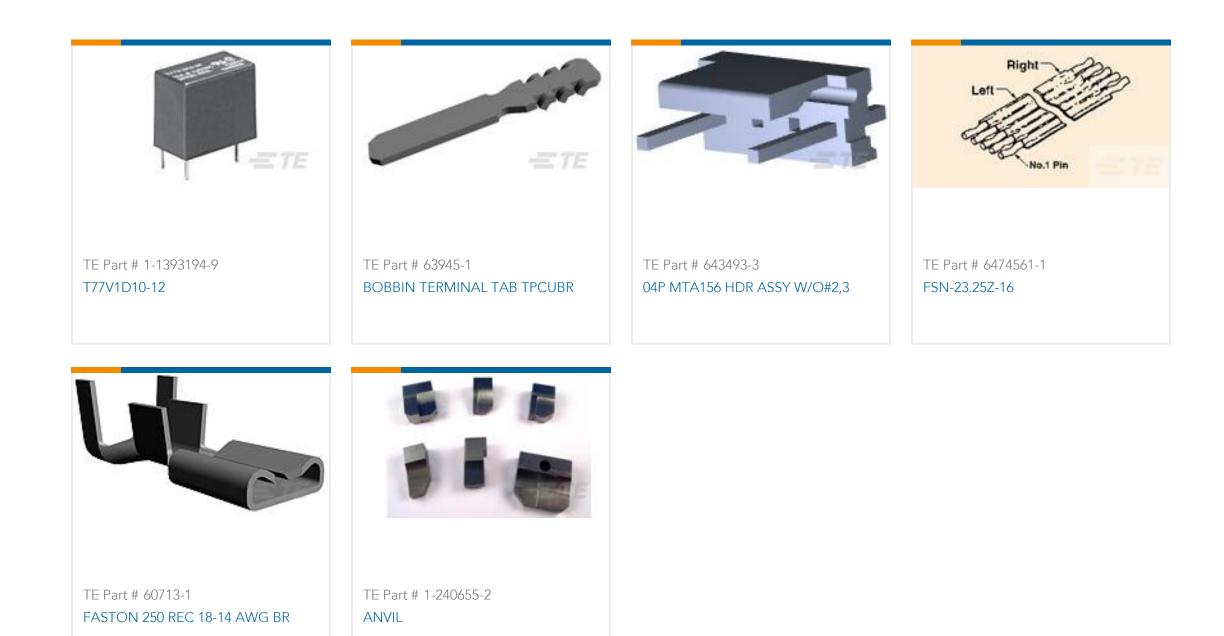

## Documents

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_3-282836-2\_J.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-282836-2\_J.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_3-282836-2\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

# Datasheets & Catalog Pages 1-1773458-1\_EURO\_STYLE\_TERMINAL\_BLOCKS\_QRG

English

Agency Approvals

UL

English