



30 dB Fixed Attenuator, N Male to N Female  
 Unidirectional Black Anodized Aluminum Heatsink  
 Body Rated to 50 Watts Up to 3 GHz

## RF Fixed Attenuators Technical Data Sheet

PE7388-30

### Features

- Directional
- DC to 3 GHz Frequency Range
- Attenuation 30±0.4 dB
- Max Power 50 Watts (CW)
- VSWR < 1.15:1

### Applications

- Instrumentation
- Precision Measurements
- Prototyping and Characterization
- Production Systems

### Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 30 dB Fixed Attenuator PE7388-30 is rated to 50 Watts and operates from DC to 3 GHz. The versatile coaxial package uses type N male to type N female connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions.

### Electrical Specifications

| Description   | Minimum | Typical | Maximum | Units  |
|---|---------|---------|---------|--------|
| Frequency Range   | DC      |         | 3       | GHz    |
| Impedance   |         | 50      |         | Ohms   |
| Nominal Attenuation   |         | 30      |         | dB     |
| Attenuation Accuracy  |         | 0.4     |         | dB     |
| VSWR  |         |         | 1.15:1  |        |
| Passive Intermodulation   |         |         | -100    | dBc    |
| Input Power, CW<br>derated linearly from 50W @ 25°C to 5W @ 125°C |         |         | 50      | Watts  |
| Input Power, Peak<br>5µs pulse, 1% duty cycle                     |         |         | 5       | kWatts |

#### Electrical Specification Notes:

Passive intermodulation specified at 910MHz with two input signals at 935MHz and 960MHz with average carrier power levels of +43dBm each.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB Fixed Attenuator, N Male to N Female Unidirectional Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 3 GHz PE7388-30](#)



30 dB Fixed Attenuator, N Male to N Female  
Unidirectional Black Anodized Aluminum Heatsink  
Body Rated to 50 Watts Up to 3 GHz

## RF Fixed Attenuators Technical Data Sheet

PE7388-30

### Mechanical Specifications

#### Size

|                           |                                  |
|---------------------------|----------------------------------|
| Length                    | 4.41 in [112.01 mm]              |
| Width/Diameter            | 1.77 in [44.96 mm]               |
| Weight                    | 0.542 lbs [245.85 g]             |
| Body Material and Plating | Black Anodized Aluminum Heatsink |

#### Configuration

|               |                       |
|---------------|-----------------------|
| Design        | Fixed, Unidirectional |
| Package Style | Connectorized         |

#### Connectors

| Description                          | Connector 1   | Connector 2            |
|--------------------------------------|---------------|------------------------|
| Type                                 | N Male        | N Female               |
| Contact Material and Plating         | Brass, Gold   | Beryllium Copper, Gold |
| Outer Conductor Material and Plating | Brass, Nickel | Brass, Nickel          |
| Body Material and Plating            | Brass, Nickel | Brass, Nickel          |

### Environmental Specifications

#### Temperature

|                 |                   |
|-----------------|-------------------|
| Operating Range | -55 to +125 deg C |
|-----------------|-------------------|

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB Fixed Attenuator, N Male to N Female Unidirectional Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 3 GHz PE7388-30](#)





30 dB Fixed Attenuator, N Male to N Female  
Unidirectional Black Anodized Aluminum Heatsink  
Body Rated to 50 Watts Up to 3 GHz

RF Fixed Attenuators Technical Data Sheet

PE7388-30

Typical Performance Data

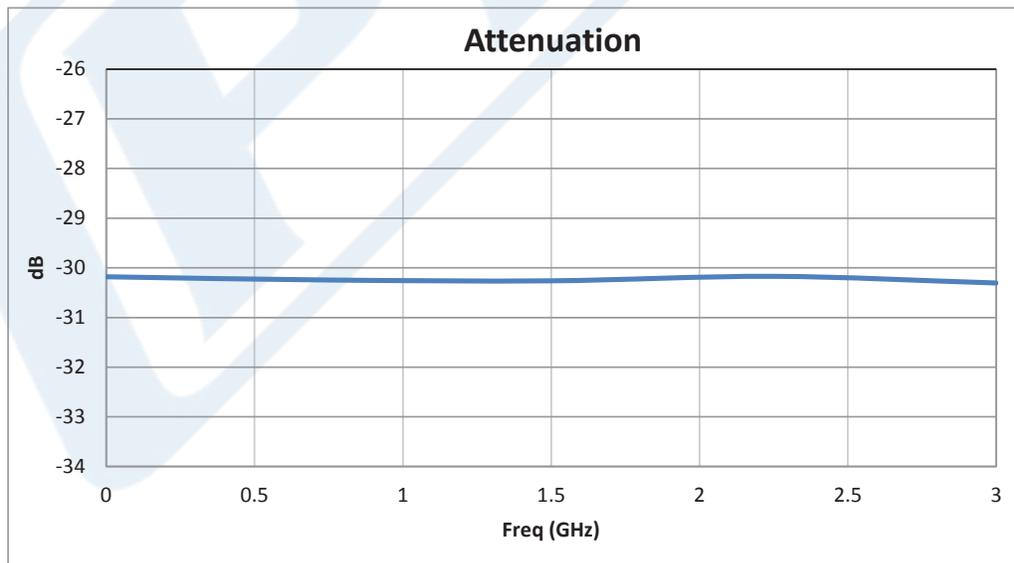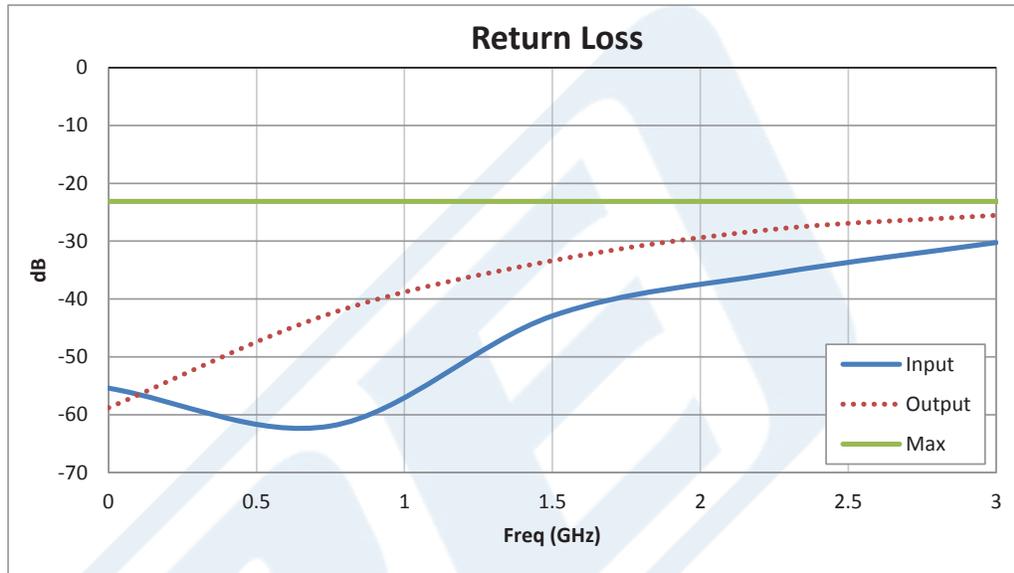

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB Fixed Attenuator, N Male to N Female Unidirectional Black Anodized Aluminum Heat-sink Body Rated to 50 Watts Up to 3 GHz PE7388-30](#)



30 dB Fixed Attenuator, N Male to N Female  
Unidirectional Black Anodized Aluminum Heatsink  
Body Rated to 50 Watts Up to 3 GHz

## RF Fixed Attenuators Technical Data Sheet

PE7388-30

30 dB Fixed Attenuator, N Male to N Female Unidirectional Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 3 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB Fixed Attenuator, N Male to N Female Unidirectional Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 3 GHz PE7388-30](https://www.pasternack.com/30db-fixed-n-male-n-female-50-watts-attenuator-pe7388-30-p.aspx)

URL: <https://www.pasternack.com/30db-fixed-n-male-n-female-50-watts-attenuator-pe7388-30-p.aspx>

# PE7388-30 CAD Drawing

30 dB Fixed Attenuator, N Male to N Female Unidirectional Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 3 GHz

| P/N       | ATTEN. | FIGURE |
|-----------|--------|--------|
| PE7388-3  | 3 dB   | 1      |
| PE7388-6  | 6 dB   | 1      |
| PE7388-10 | 10 dB  | 1      |
| PE7388-15 | 15 dB  | 1      |
| PE7388-20 | 20 dB  | 1      |
| PE7388-30 | 30 dB  | 1      |
| PE7388-40 | 40 dB  | 1      |

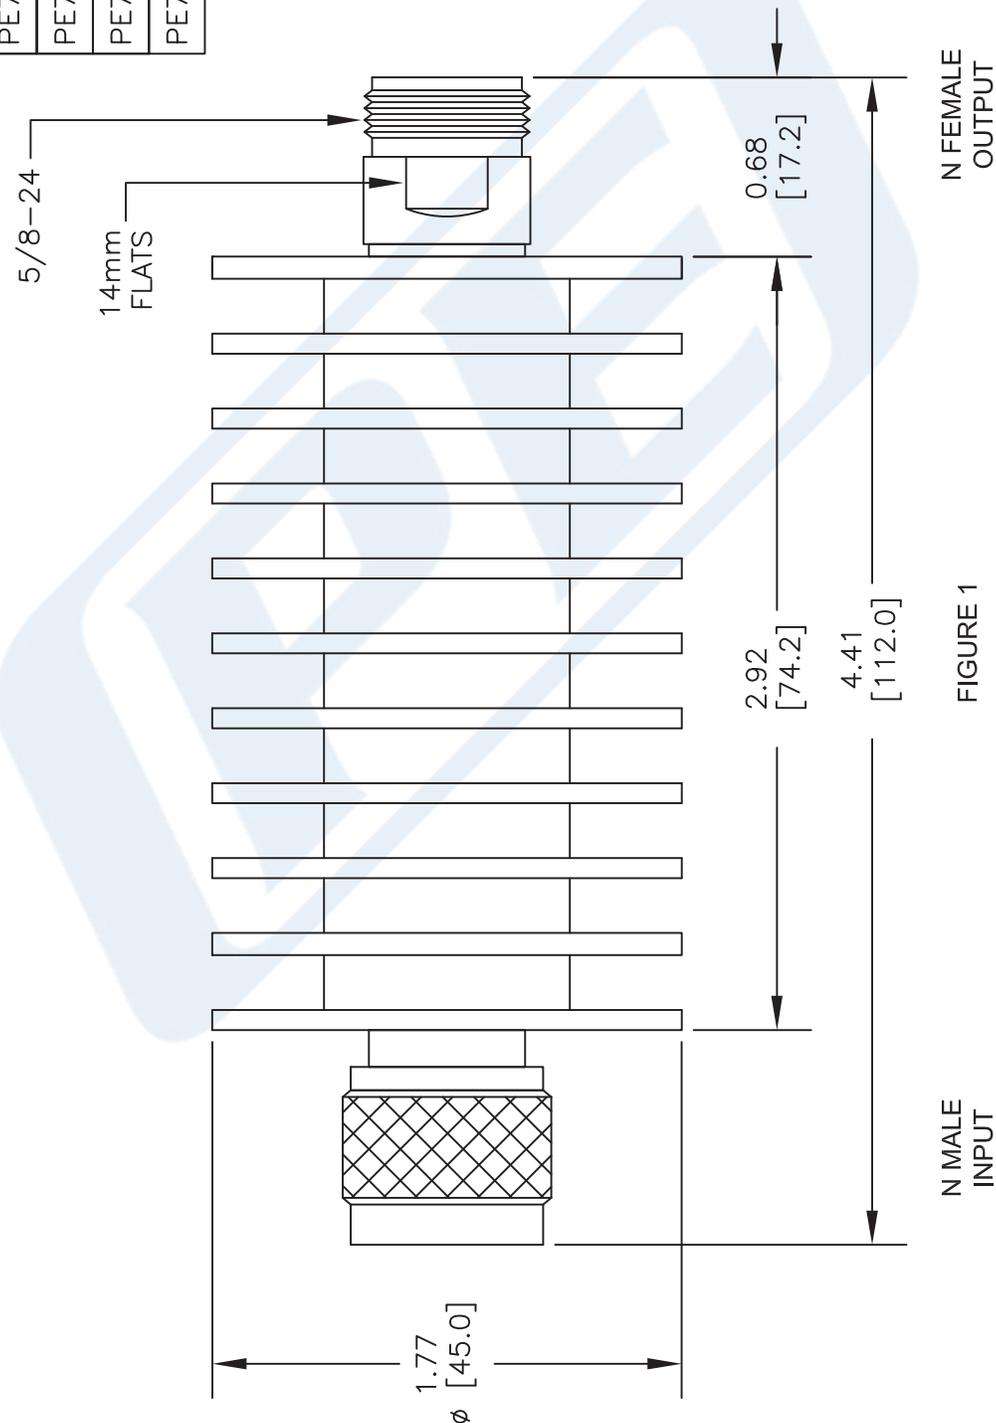


FIGURE 1

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE7388**

**(PE) PASTERNAK®**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

CAD FILE 062216 SCALE N/A SIZE A 2233

FSCM NO. 53919