SIEMENS

Data sheet 3RV2811-1FD10



Circuit breaker size S00 for transformer protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 5 A N-release 104 A screw terminal Standard switching capacity

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For transformer protection according to UL 489/CSA C22.2 No.5
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	7.25 W
at AC in hot operating state per pole	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)
mechanical service life (operating cycles)	
 of the main contacts typical 	100 000
of auxiliary contacts typical	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
operating voltage	
rated value	20 690 V
 at AC-3 rated value maximum 	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	5 A
operational current	
 at AC-3 at 400 V rated value 	5 A
at AC-3e at 400 V rated value	5 A
operating power	
• at AC-3	
— at 230 V rated value	1.1 kW

— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	4 kW
• at AC-3e	
— at 230 V rated value	1.1 kW
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	4 kW
operating frequency	
at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	uroma.
at AC at 240 V rated value	100 kA
at AC at 400 V rated value at AC at 400 V rated value	100 kA
at AC at 400 V rated value at AC at 500 V rated value	100 kA
at AC at 690 V rated value at 490 AC V/277 V according to LIL 490 rated value.	6 kA 65 kA
at 480 AC Y/277 V according to UL 489 rated value	OO KA
operating short-circuit current breaking capacity (Ics) at AC	400 LA
• at 240 V rated value	100 kA
at 400 V rated value	100 kA
 at 500 V rated value 	100 kA
at 690 V rated value	4 kA
response value current of instantaneous short-circuit trip unit	104 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit protection of the main circuit	
● at 400 V	gG 32 A
● at 500 V	gG 32 A
● at 690 V	gG 25 A
Installation/ mounting/ dimensions	
installation/ mounting/ unitensions	
mounting position	any
	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
mounting position	·
mounting position fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
mounting position fastening method height	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
mounting position fastening method height width	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
mounting position fastening method height width depth	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
mounting position fastening method height width depth required spacing	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm 30 mm 30 mm 30 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — upwards — at the side	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm
mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for live parts at 500 V — downwards — at the side • for live parts at 500 V — downwards — at the side	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm 97 mm 30 mm

— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	70 mm
— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
• for main contacts	
— solid or stranded	1 10 mm², max. 2x 10 mm²
 finely stranded with core end processing 	1 16 mm², max. 6 + 16 mm²
• for AWG cables for main contacts	2x (14 10)
tightening torque	
• for main contacts with screw-type terminals	2.5 3 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	
• for main contacts	M4
Safety related data	
B10 value	
 with high demand rate according to SN 31920 	5 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	50 %
 with high demand rate according to SN 31920 	50 %
failure rate [FIT]	
 with low demand rate according to SN 31920 	50 FIT
T1 value for proof test interval or service life according to IEC 61508	10 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
display version for switching status	Handle
Certificates/ approvals	
General Product Approval	Declaration of Co formity
Confirmation	









Declaration of Conformity	Test Certificates	Marine / Shipping	other
---------------------------	-------------------	-------------------	-------



Type Test Certificates/Test Report

Special Test Certific-<u>ate</u>





Confirmation

other	Railway



Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2811-1FD10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2811-1FD10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1FD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2811-1FD10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1FD10/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2811-1FD10&objecttype=14&gridview=view1

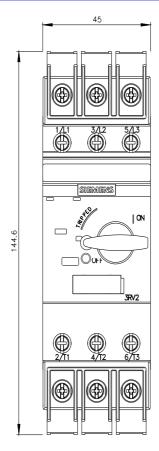

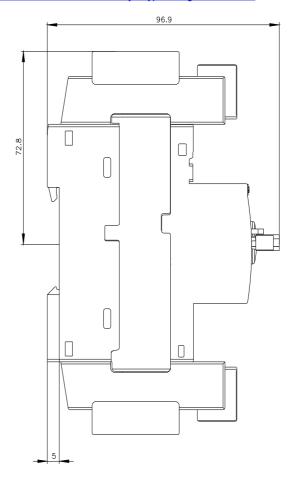

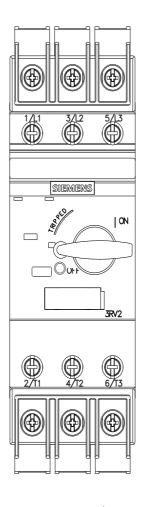

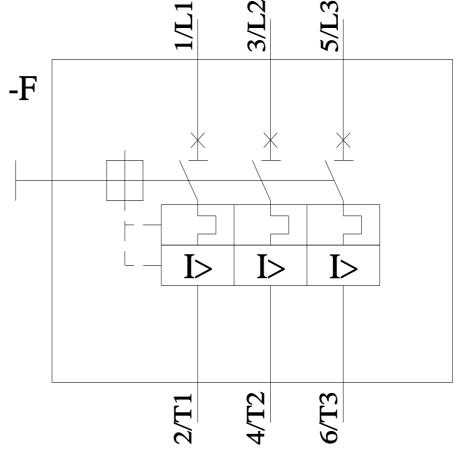

last modified: 5/1/2023 🖸