

WASHER

CABI F 138 RF: IPEX MHF PLUG + RP SMA STRAIGHT BULKHEAD JACK WITH O-RING RATED TO IP67/68 + MUTIPLE CABLES SIZES

SPECIFICATIONS:


- 1. IPEX MHF PLUG FOR Ø1.13MM CABLE: 20278-112R-13. FOR Ø1.37MM CABLE: 20351-112R-37, FOR RG178 CABLE: 20278-112R-18, FOR Ø1.32MM DS CABLE: 20278-112R-32.
- 2. COAXIAL CABLE, SEE P/N OPTIONS.
- 3. RP SMA ST BULKHEAD JACK WITH O-RING RATED TO IP67/68. PN: RFCT-SMA008-F78, GOLD.

ENVIRONMENTAL:

- A. BULKHEAD MOUNTED CONNECTOR (RFCT-SMA008-F78) TESTED TO THE FOLLOWING SPECIFICATION:
 - i. IP6X DUST TIGHT NO PARTICLE INGRESS.
 - ii. IPX7 WATERPROOF FOR 30 MINUTES UP TO 1M UNDERWATER.
- iii. IPX8 WATERPROOF FOR 48 HOURS AT 1M UNDERWATER.
- iv. IPX8 WATERPROOF FOR 12 HOURS AT 5M UNDERWATER.
- v. PRESSURE TEST 1 BAR FOR 10 SECONDS.


NOTES:

- 1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
- 2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 25MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
- 3. CONTACT GRAD CONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
- 4. WORKING FREQUENCY RANGE: DC-3GHz.
- 5. OPERATING TEMPERATURE: -40°C~+90°C
- 6. IMPEDANCE: 50 OHM.



USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST: APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

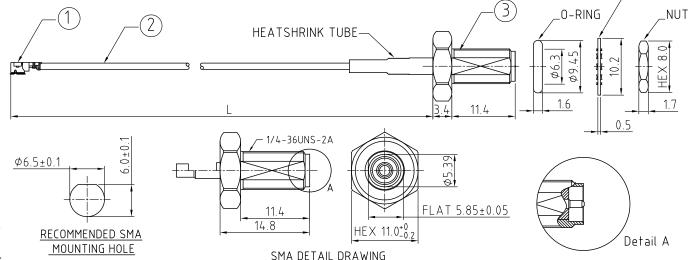

HOW TO ORDER

STANDARD = 100, 150, 200)

51-200mm: ±5mm.

201-400mm: ±7mm.

Tolerance: <50mm: ±2mm.

CABLE SIZE OPTIONS: CABLE 138 RF - X X X - X X - X - X $0 = \emptyset 1.13MM$ CABLE, COLOR: GRAY. $1 = \phi 1.13MM LOW LOSS CABLE, COLOR: GRAY.$ $2 = \phi 1.37MM$ CABLE, COLOR: BLACK. "L" LENGTH IN MM: 3 = RG178 CABLE, COLOR: BROWN. eq: 100MM = 100 4 = ϕ 1.32MM DS CABLE, COLOR: GRAY. (MIN. 025-MAX.400

WASHER AND NUT OPTIONS:

BLANK = SEPARATELY PACKED (STANDARD)

A = ASSEMBLED WITH CONNECTOR


ORIENTATION OPTIONS:

BLANK = DOES NOT HAVE A FIXED ORIENTATION

F1 = MHF CONNECTION DOWN (L=25-100MM)

F2 = MHF CONNECTION UP (L=25-100MM)

(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)



Scale:	Scale: NTS		THIRD ANGLE		Tolerances: N/A N/A	
Drawn: CO	-	\Rightarrow	-	.XX .XXX ANGLES	N/A N/A	
App'd: X	xx	Title CABLE ASSEMBLY				
Date: 25 F	Date: 25 FEB. '24		Revision: 2.1		Unit: mm	





Type: Cable 138 RF CABLE 138 RF

E and 0 E

Drawing Number: Sheet 1 of 1 Drawing (C)

(C) THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT