Available at Digi-Key**

www.digikey.com



2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040 www.conwin.com

Ultra Low Phase Noise VCXO VBLD861-Series

Description:

The Connor-Winfield RoHS compliant VBLD861 is a 3.3V Voltage Controlled Crystal Oscillator (VCXO) with LVCMOS output. The VBLD861 is designed with a 3rd overtone crystal for ultra-low phase noise and jitter performance.



CONNO


Features:

- 3.3 Vdc Operation
- Pull Range: ±20ppm
- Temperature Range Options: 0 to 85°C, 0 to 70°C, -40 to 85°C, and -20 to 70°C
- Low Jitter: 60fs Typical
- LVCMOS Output
- 9x14mm SMT Package
- Tape and Reel Packaging

Package Outline 0.355 0.202 0.060 (5.13mm 9.02mm (1.52mm) 2419 00.0MHZ VBLD861 0.275 (6.99mm) С 0.200 0.550 (13.97mm) (5.08mm) 0.040 0 0.034 (1.02mm) (0.86mm) PIN 1


Dimensional Tolerance: ±0.005 inches (0.127mm)

Suggested Pad Layout



Pad Connections

- 1: Control Voltage (Vc)
- 2: Ground
- 3: Output
- 4: Supply Voltage (Vdd)

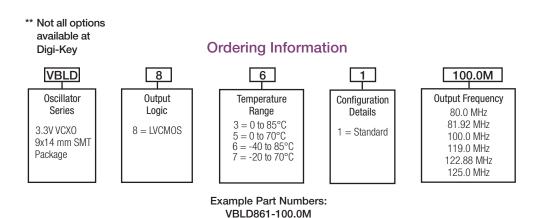

VBLD861-081.92M



Bulletin	VX671
Page	1 of 4
Revision	06
Date	07 May 2024



Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-40	-	85	°C	
Supply Voltage (Vdd)	-0.5	-	4.6	Vdc	
Control Voltage (Vc)	-0.5	-	Vdd + 0.5	Vdc	

Operating Specifications Parameter Minimum Nominal Maximum Units Notes Center Frequency: (Fo) 80 125 MHz Operating Temperature Range 0 °C Option 3 85 °C Option 5 0 70 °C Option 6 -40 85 °C Option 7 -20 70 Frequency Stability vs Temperature ±10 PPM -Frequency Stability vs Supply Voltage -0.2 0.2 PPM 3.3V+/-5% -Frequency Stability vs Aging (10 Yrs) PPM ±5 -Supply Voltage: (Vdd) 3.135 3.3 3.465 Vdc Supply Current: (Idd) 30 15 mΑ -Jitter @ Fo=100 MHz Period Jitter 3.0 5.0 ps RMS _ Integrated Phase Jitter _ 60 100 fs RMS 1 Typical SSB Phase Noise @ Fo=100 MHz @ 10 Hz offset -80 dBc/Hz @ 100 Hz offset -110 dBc/Hz @ 1 kHz offset -140 dBc/Hz _ @ 10 kHz offset -155 _ dBc/Hz @ 100 kHz offset dBc/Hz -162 _ @ 1 MHz offset -165 dBc/Hz Start-Up Time 10 ms

Input Characteristics					
Parameter	Minimum	Nominal	Maximum	Units	Notes
Control Voltage Range (Vc)	0.3	1.65	3.0	Vdc	
Pull Slope at Vc=1.65V	-	15	-	ppm/V	
Pull Range at 25°C	-	±20	-	ppm	
Absolute Pull Range (APR)	±5	-	-	ppm	2
Monotonic Linearity	-10	-	10	%	
DC Input Impedance	50K	-	-	Ohm	3
Modulation Bandwidth (3dB)	10	-	-	kHz	

LVCMOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load	-	15	-	pF	
Voltage (High) Voh	0.9Vdd	-	-	Vdd	
(Low) Vol	-	-	0.1Vdd	Vdd	
Duty Cycle at 50% Level	45	50	55	%	
Rise / Fall Time: 20% to 80%	-	-	2	ns	

Notes:

1.BW= 12 kHz to 20 MHz

 Absolute Pull Range (APR) is the minimum guaranteed pull range of the VCXO under all conditions over lifetime operation including calibration @ 25°C, frequency stability vs. the change in temperature, frequency vs. change in supply voltage, frequency vs. change in load, shock and vibration and 10 years aging. The APR is referenced to (Fo). Positive transfer function.
Measured from pin 1 to ground.

VX671
2 of 4
06
07 May 2024

Specifications subject to change without notification. See Connor-Winfield's website for latest revision. © Copyright 2024 The Connor-Winfield Corporation Not intended for life support applications.




2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040 www.conwin.com

Package Characteristics:

Package	Non-hermetic package consisting of FR4 substrate and grounded metal cover.
Moisture Sensitivity Level	MSL-1

Environmental Characteristics

Shock	500 G's 1ms, Halfsine, 3 shocks per direction, per MIL-STD 202G, Method 213B Test Condition D.
Sinusoidal Vibration	0.06" D.A. or 10G's Peak, 10 to 500 Hz, per MIL-STD-202G, Method 204D, Test Condition A.
Random Vibration	5.35 G's rms. 20 to 2000 Hz per MIL-STD-202G, Method 214, Test Condition 1A, 15 minutes each axis.
Moisture	10 cycles, 95% RH, Per MIL-STD-202G, Method 112.
Marking Permanency	Per MIL-STD-202G, Method 215J.
Solder Process Recommendation	ons: RoHS compliant, lead free. See solder profile on page 4.
In-line reflow:	Refer to recommended reflow pre-heat and reflow temperatures on page 4. Component solder is
	Pb free high temperature eutectic alloy with a melting point of 221°C.
In-line oven profile:	We recommend using KIC profiler or similar device placing one of the thermocouples on the
	device to insure that the internal package temperature does not exceed 221°C.
Removal of device:	If for any reason the device needs to be removed from the board, use a temperature controlled
	repair station with profile monitoring capabilities. Following a monitored profile will insure the
	device is properly pre-heated prior to reflow. Refer to IPC 610E for inspection guidelines.
Recommended Cleaning Proc	ess: (If required)
	Device is non-hermetic. Do not submerge the device. We recommend in-line warm water wash
	with air knife and drying capabilities. If cleaner does not have drying capability, then use hot air
	circulated oven. Boards should be placed in the oven vertically for good water runoff.
	Device must be dried properly prior to use!
	Note: If saponifier is used make sure the device is rinsed properly to insure all residues are
	removed. PH of saponifier should not exceed 10.
Drying Temperature:	Between 85 to 100°C.
Drying Time:	Time will vary depending on the board size.

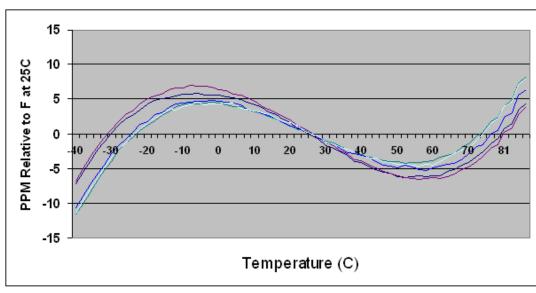


Typical Frequency vs Temperature Fo=100MHz

Bulletin	VX671
Page	3 of 4
Revision	06
Date	07 May 2024




2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040 www.conwin.com




Typical Phase Noise Fo = 100MHz


Test Circuit

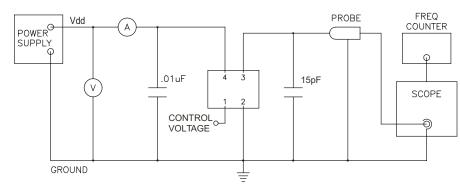

Output Waveform



Solder Profile




Meets IPC/JEDEC J-STD-020C

Tape and Reel Information

MEETS EIA-481A & EIAJ-1009B 500 PCS/REEL MAXIMUM

DIRECTION OF FEED (CUSTOMER)

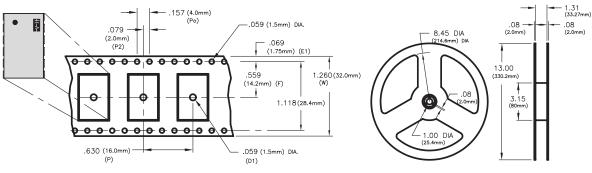

Bulletin	VX671
Page	4 of 4
Revision	06
Date	07 May 2024

Specifications subject to change without notification. See Connor-Winfield's website for latest revision. © Copyright 2024 The Connor-Winfield Corporation Not intended for life support applications.