

WR-12 Waveguide Magic Tee, UG-387/U Round Cover Flange Operating from 60 GHz to 90 GHz



Waveguide Magic Tees Technical Data Sheet

PEWMT1001

Features

- 60 to 90 GHz Frequency Range
- E to H Port Isolation 25 dB Min
- Collinear Port Isolation 15 dB Min

- 1 dB Insertion loss
- E Band

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- · Wireless Communications

SATCOM

Description

Pasternack's PEWMT1001 is a magic, or hybrid tee that operates from 60 GHz to 90 GHz, E band. It is a 4 port device that is internally tuned to optimize matching, balance, and isolation. Magic tees have an H-plane (sum) port, an E-plane (difference) port, and two collinear ports. A signal applied to the H port will be equally divided between the two collinear ports. A signal applied to the E port will be divided between the two collinear ports but with a 180 degree phase difference. Similarly, when two in-phase signals of equal amplitude are applied to the collinear ports, these will be added together at the H-plane (sum) port and subtracted from one another at the E-plane (difference) port.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	60		90	GHz
Insertion Loss			1	dB
Isolation, E-H (Difference-Sum) Ports	25			dB
Isolation, Collinear Ports	15			dB

Mechanical Specifications

Size

Weight 0.124 lbs [56.25 g]

Waveguide Size WR-12
Flange Type Round Cover
Flange Designation UG-387/U
Body Material and Plating Aluminum, Gold
Body Plating Specification ASTMB488

Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-12 Waveguide Magic Tee, UG-387/U Round Cover Flange Operating from 60 GHz to 90 GHz PEWMT1001

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com




WR-12 Waveguide Magic Tee, UG-387/U Round Cover Flange Operating from 60 GHz to 90 GHz



Waveguide Magic Tees Technical Data Sheet

PEWMT1001

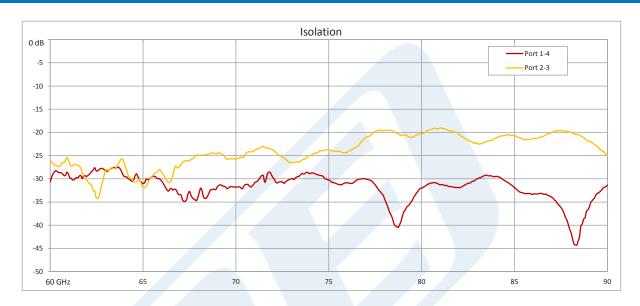

WR-12 Waveguide Magic Tee, UG-387/U Round Cover Flange Operating from 60 GHz to 90 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-12 Waveguide Magic Tee, UG-387/U Round Cover Flange Operating from 60 GHz to 90 GHz PEWMT1001

URL: https://www.pasternack.com/wr-12-waveguide-magic-tee-ug387-round-90-ghz-pewmt1001-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

PEWMT1001 CAD Drawing

WR-12 Waveguide Magic Tee, UG-387/U Round Cover Flange Operating from 60 GHz to 90 GHz

