

SPECIFICATION

Part No. : **GP.1575.25.4.A.02**

Product Name : 4mm thick GPS/Galileo Patch Antenna

Features : 25mm*25mm*4mm

Halogen Free

RoHS and REACH Compliant





1. Introduction

This miniaturized ceramic GPS/Galileo patch antenna is based on smart $\textbf{XtremeGain}^{\intercal}$ technology. It is mounted via pin and double-sided adhesive and has been tuned as optimal solution for the customer device environment.

2. Specification Table


Original Patch Specification tested on 50*50mm ground plane

No	Parameter	Specification			
	Range of Receiving Frequency	1575.42MHz +/- 1.023MHz			
1	Center Frequency	1575MHz +/- 3MHz			
2	Impedance	50Ω			
3	Bandwidth	10 MHz min Return Loss <-10dB			
4	VSWR	2:1	Contar Fraguency		
5	Gain toward Zenith	1.55 dBic typ.			
6	Gain at 10°Elevation	-2.5 dBic typ.	Center Frequency		
7	Axial Ratio	3dB Max.			
8	Polarization	Right Hand Circular Polarization			
	Frequency Temperature				
9	Coefficient (Tf)	0 ± 20ppm/°C			
10	Operating Temperature	-40ºC to +85ºC			




3. Electrical Specification

3.1 Return Loss

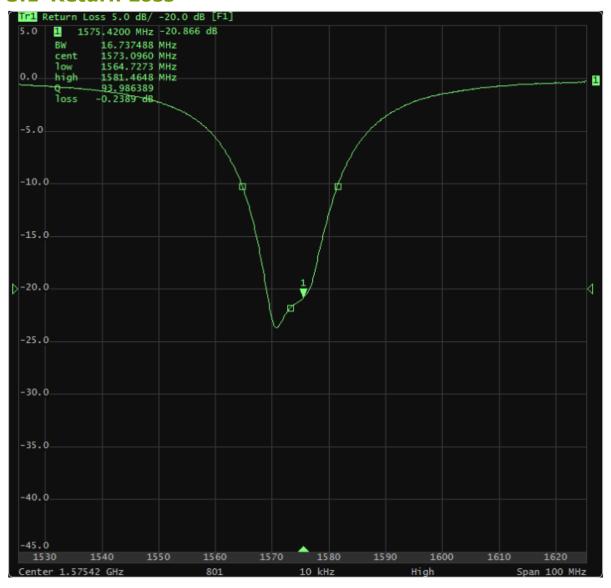




3.2 Smith Chart

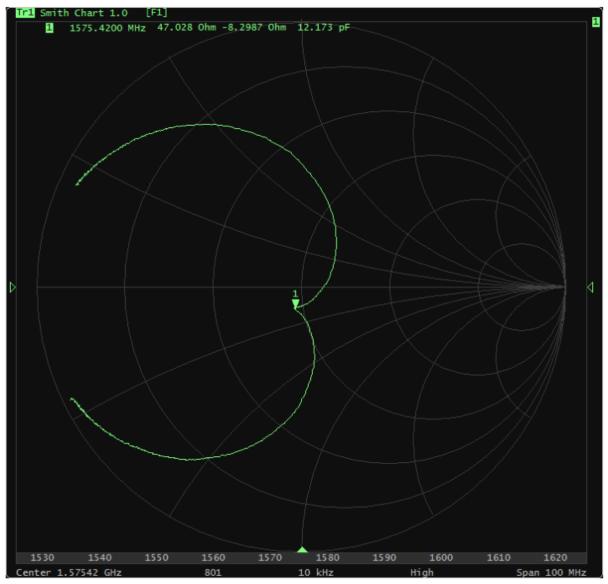




3.3. VSWR

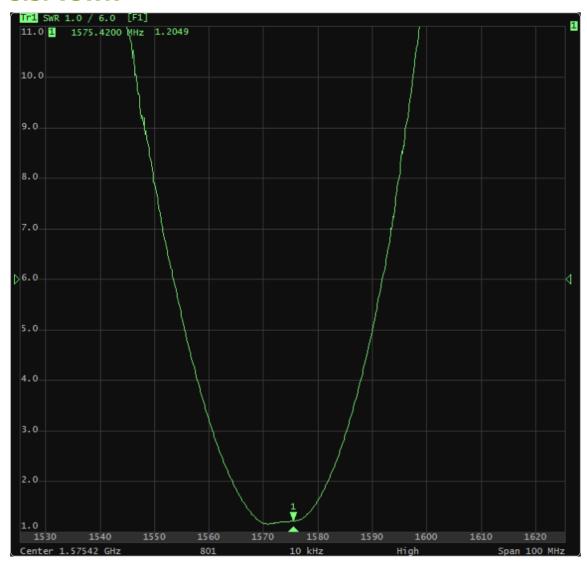


4. 2D Radiation Patterns

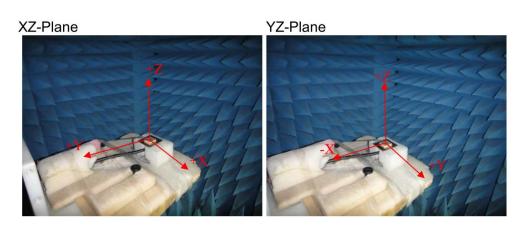




4.1 XZ Patterns

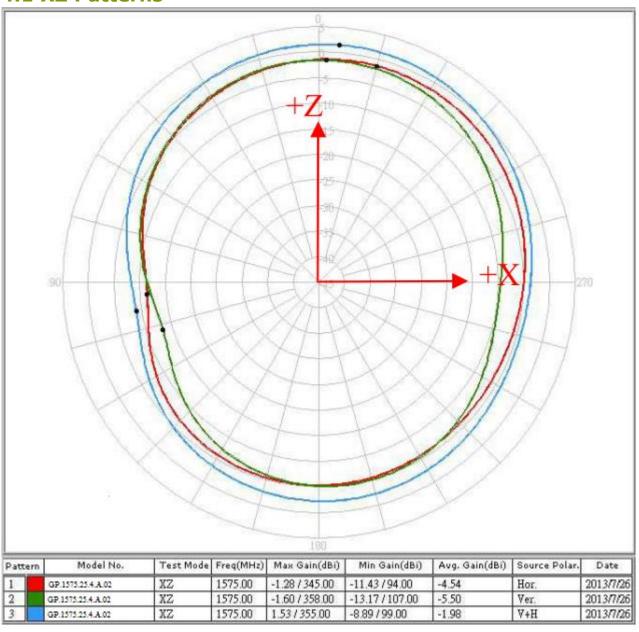




4.2 YZ Patterns

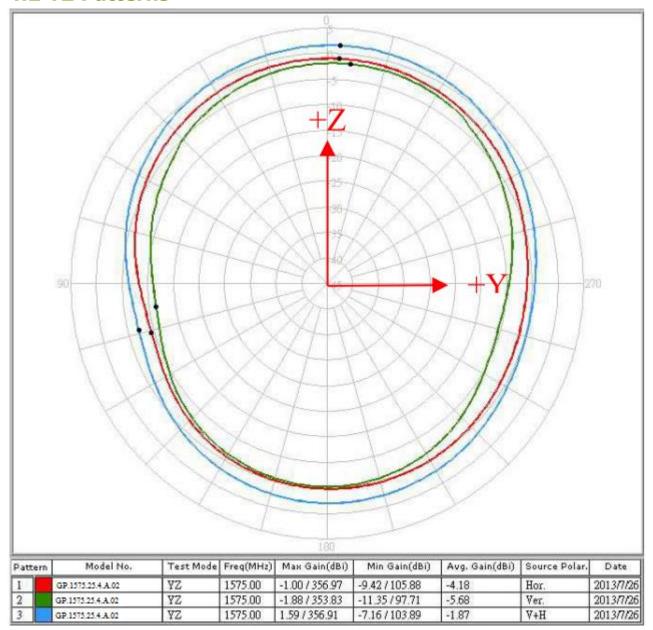



5. Gain Pattern Value

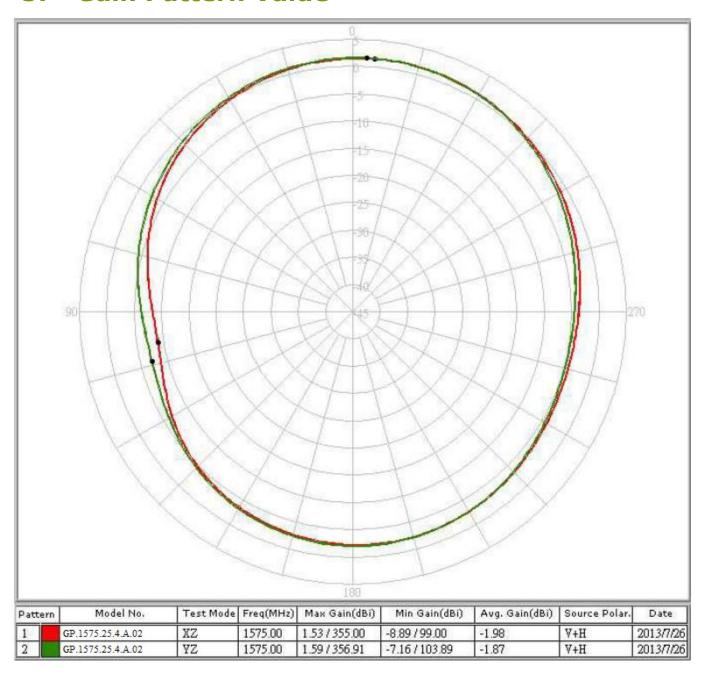




Angle	XZ-Plane	YZ-Plane	
90°	-8.37	-6.59	
75°	-6.12	-4.70	
60°	-3.66	-2.80	
45°	-1.65	-1.05	
30°	-0.11	0.26	
15°	0.94	1.14	
0°	1.45	1.55	
345°	1.46	0.00	
330°	0.99	0.00	
315°	0.11	0.57	
300°	-1.10	-0.82	
285°	-2.45	-2.45	
270°	-3.69	-3.94	

(Unit:dBi)



6. Axial Ratio Pattern

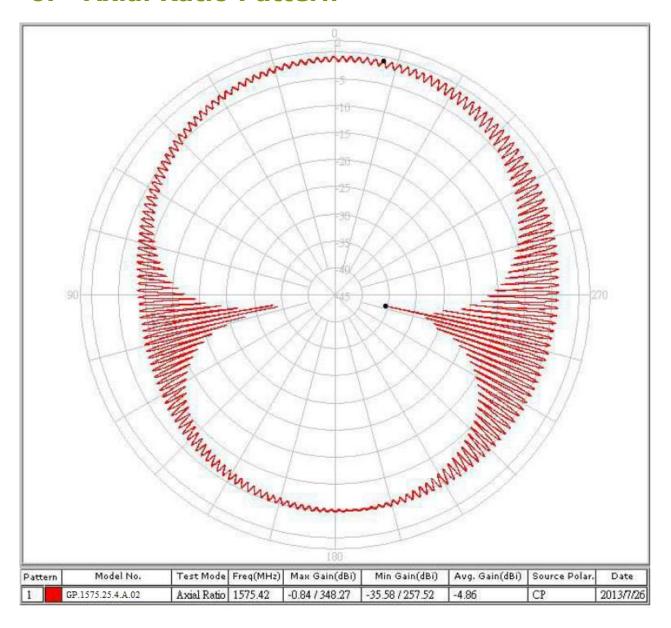




Angle	Axial Ratio	
90°	10.17	
75°	3.27	
60°	2.03 1.51	
45°		
30°	1.14	
15°	0.87	
0°	0.83	
345°	1.14	
330°	1.88	
315°	2.94	
300°	4.58	
285°	6.86	
270°	12.88	

(At 1575.42MHz)




7. 2D Mechanical Drawing

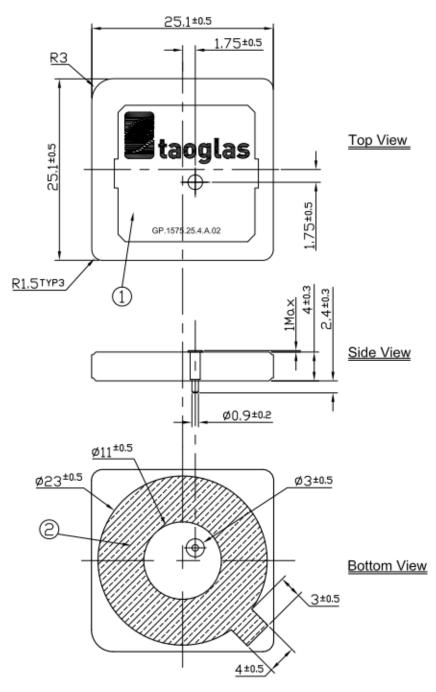

		Name	Material	Finish	QTY
NOTES:	1	GP.1575 Patch 25x25x4	Ceramic	Clear	1
1.Double sided adhesive area	2	Double sided Adhesive	NITTO 5015	White Liner	1





7.1 Layout Dimension

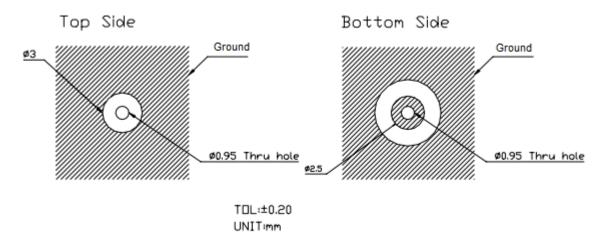

*Note Layout Dimensions may be affected by the thickness of the PCB


8. Test Jig and Dimension

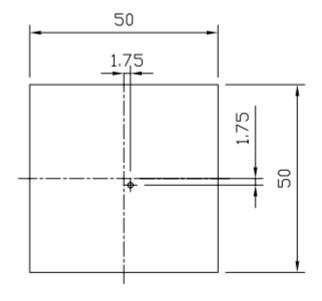






8.1 Test Fixture Antenna Setup and Measurements

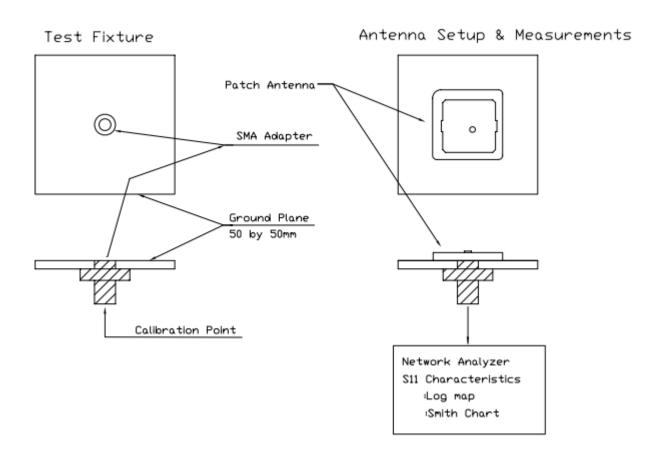





9. Packaging


50 pieces per Tray 200 per Inner Carton 4 x 200 – 800 pieces per Outer Carton

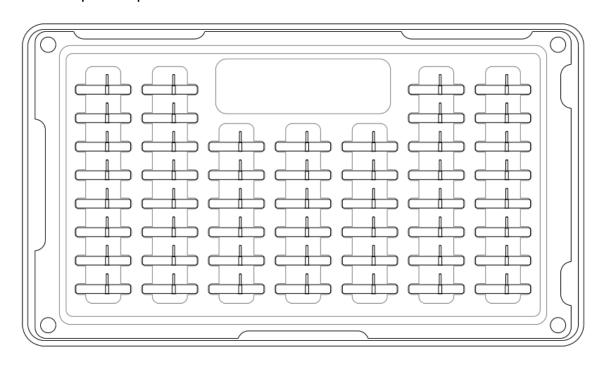

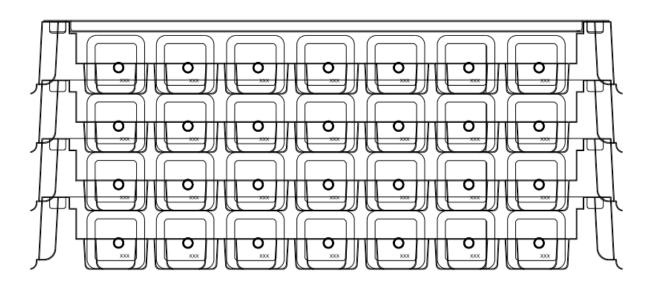



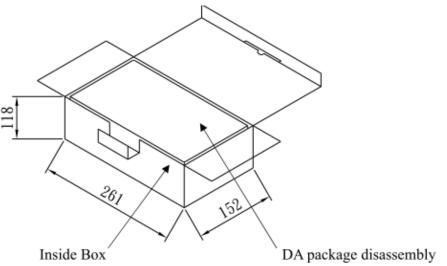

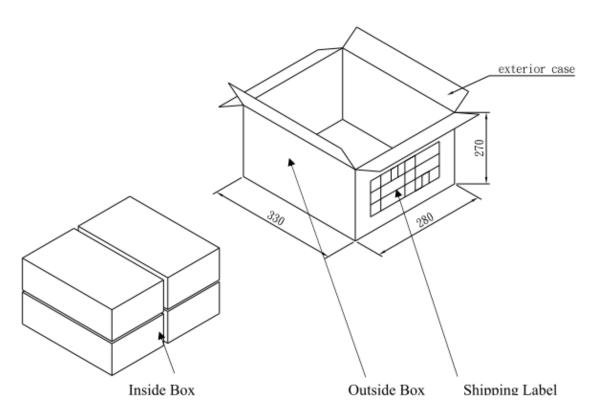

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas