

**Data sheet | Item number: 2009-402**

Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 60 mm long; gray

[www.wago.com/2009-402](http://www.wago.com/2009-402)



**Data**

**Notes**

Safety information

Push down the wire jumper until fully inserted!

**Electrical data**

**Ratings per IEC/EN**

Nominal voltage (III/3)	800 V
Rated impulse voltage (III/3)	8 kV
Rated current	9 A

**Connection data**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Connection 1

Solid conductor	0.75 mm <sup>2</sup>
-----------------	----------------------

## Mechanical data

Wire length of wire jumpers	60 mm
-----------------------------	-------

## Material data

Note (material data)	Information on material specifications can be found here
----------------------	--

Color	gray
-------	------

Fire load	0.015 MJ
-----------	----------

Weight	1.4 g
--------	-------

## Commercial data

Product Group	2 (Terminal Block Accessories)
---------------	--------------------------------

eCl@ss 10.0	27-14-11-40
-------------	-------------

eCl@ss 9.0	27-14-11-40
------------	-------------

ETIM 8.0	EC000489
----------	----------

ETIM 7.0	EC000489
----------	----------

ECCN	NO DATA
------	---------

PU (SPU)	100 (10) pcs
----------	--------------

Packaging type	box
----------------	-----

Country of origin	DE
-------------------	----

GTIN	4050821458883
------	---------------

Customs tariff number	85444290900
-----------------------	-------------

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Downloads

### Documentation

#### Bid Text

2009-402	2019 年2月19 日	xml 2.8 kB	Download
----------	--------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

X81 - Datei

2009-402 doc - Datei	2017 年4月28 日	doc 24.1 kB	Download
-------------------------	--------------	----------------	----------

Additional Information

Technical Section Technical explanations		pdf 2.3 MB	Download
---	--	---------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 2009-402		URL	Download
EPLAN Data Portal 2009-402		URL	Download


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2009-402 Push-in type wire jumper; 0.75 mm <sup>2</sup> ; insulated; 60 mm long; gray		URL	Download
---	--	-----	----------

Installation Notes


Commoning

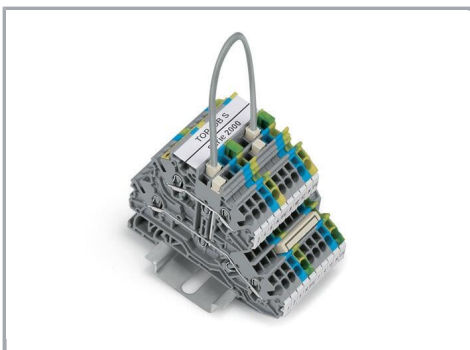

Push down the wire jumper (2009-402) until fully inserted. For rewiring, lift the jumper with an operating tool at the notch provided for this purpose on the jumper.

Subject to changes. Please also observe the further product documentation!

## Commoning

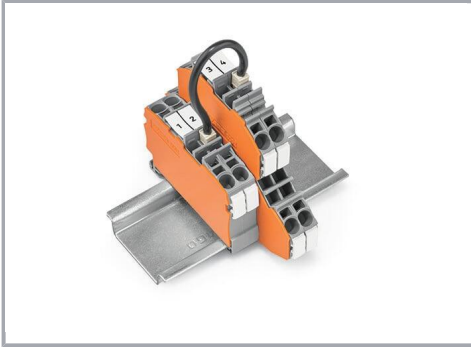

Push-in type wire jumpers common terminal blocks over longer distances and across multiple levels.

## Product family

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!