


Data sheet | Item number: 2009-404

Push-in type wire jumper; 0.75 mm²; insulated; 110 mm long; gray

www.wago.com/2009-404

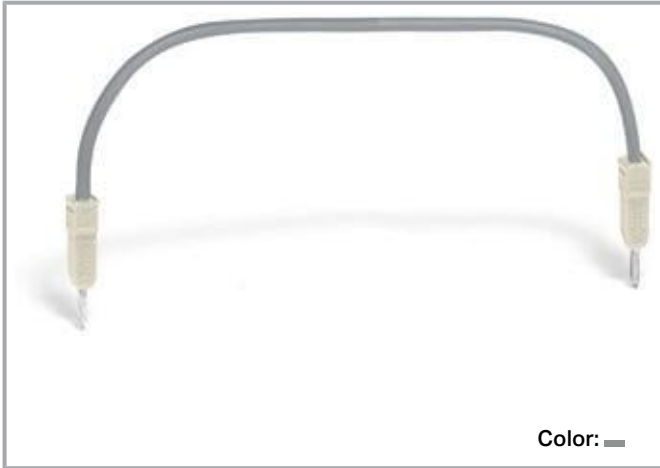

Data

Notes

Safety information

Push down the wire jumper until fully inserted!

Electrical data

Ratings per IEC/EN

Nominal voltage (III/3)	800 V
Rated impulse voltage (III/3)	8 kV
Rated current	9 A

Connection data

Connection 1

Solid conductor	0.75 mm ²
-----------------	----------------------

Mechanical data

Wire length of wire jumpers	110 mm
-----------------------------	--------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Material data

Note (material data)

Information on material specifications can be found here

Color	gray
Fire load	0.022 MJ
Weight	2 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 8.0	EC000489
ETIM 7.0	EC000489
ECCN	NO DATA
PU (SPU)	100 (10) pcs
Packaging type	box
Country of origin	DE
GTIN	4050821458890
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Downloads

Documentation

Bid Text

2009-404 X81 - Datei	2019 年2月19日	xml 2.8 kB	Download
2009-404 doc - Datei	2017 年4月28日	doc 24.1 kB	Download

Additional Information

Technical Section Technical explanations	pdf 2.3 MB	Download
---	---------------	----------

Subject to changes. Please also observe the further product documentation!

CAD/CAE-Data

CAE data

WSCAD Universe 2009-404	URL	Download
EPLAN Data Portal 2009-404	URL	Download


Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2009-404	URL	Download
Push-in type wire jumper; 0.75 mm ² ; insulated; 110 mm long; gray		

Installation Notes


Commoning

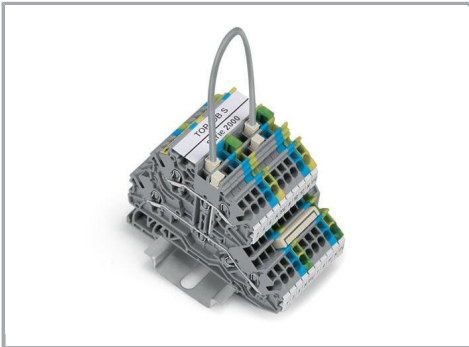

Push down the wire jumper (2009-402) until fully inserted. For rewiring, lift the jumper with an operating tool at the notch provided for this purpose on the jumper.

Commoning

Subject to changes. Please also observe the further product documentation!

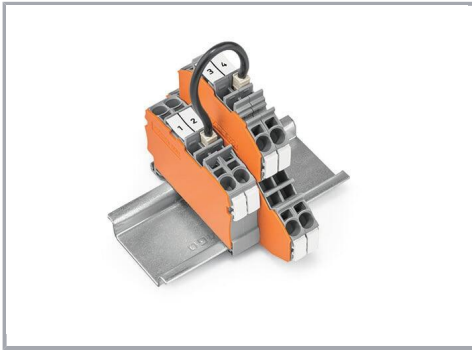

Push-in type wire jumpers common terminal blocks over longer distances and across multiple levels.

Product family

TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!