


Data sheet | Item number: 884-1843

Jumper; for M12 stud bolts; 3-way; unplated; white

www.wago.com/884-1843

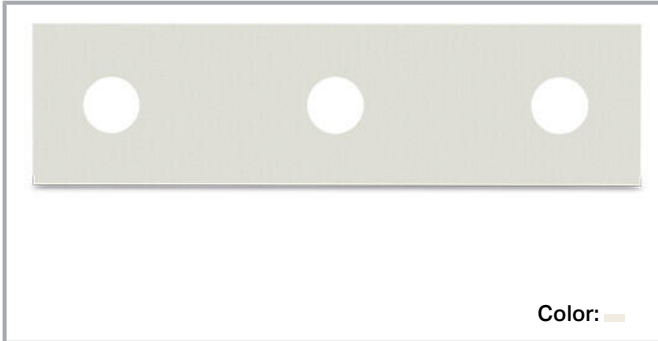

Data

Electrical data

Ratings per IEC/EN

Nominal voltage (III/3)	1000 V
Rated current	353 A

Ratings per UL

Rated voltage UL (Use Group B)	1000 V
Rated current UL (Use Group B)	360 A
Rated voltage UL (Use Group C)	1000 V
Rated current UL (Use Group C)	360 A
Rated voltage UL (Use Group D)	1000 V
Rated current UL (Use Group D)	360 A

Ratings per CSA

Rated voltage CSA (Use Group B)	1000 V
Rated current CSA (Use Group B)	380 A
Rated voltage CSA (Use Group C)	1000 V
Rated current CSA (Use Group C)	380 A
Rated voltage CSA (Use Group D)	1000 V
Rated current CSA (Use Group D)	380 A

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Material data

Note (material data)

Information on material specifications can be found here

Color	white
Weight	197 g

Commercial data

ETIM 8.0	EC000489
ETIM 7.0	EC000489
ECCN	NO DATA
PU (SPU)	10 pcs
Packaging type	bag
Country of origin	DE
GTIN	4055143941945
Customs tariff number	85366990990

Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Downloads

Documentation

Additional Information

Technical Section	pdf	Download
Technical explanations	2.3 MB	

CAD/CAE-Data

CAE data

EPLAN Data Portal 884-1843	URL	Download
----------------------------	-----	----------

Asset Administration Shell

Asset Administration Shell 884-1843	URL	Download
-------------------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 884-1843
Jumper; for M12 stud bolts; 3-way; unplated; white

URL

Download

Installation Notes

Subject to changes. Please also observe the further product documentation!