

IE-CDR-V14MRJ/VAPM-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

FreeCon Active PROFINET repeater for PushPull Var.14
plug-in connectors according to IEC 61076-3-117 and
PushPull Power according to the PROFINET specification

General ordering data

Version	PROFINET copper repeater, FreeCon, IP65
Order No.	2581810000
Type	IE-CDR-V14MRJ/VAPM-C
GTIN (EAN)	4050118590869
Qty.	1 pc(s).

IE-CDR-V14MRJ/VAPM-C

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	53 mm	Depth (inches)	2.087 inch
Width	100 mm	Width (inches)	3.937 inch
Length	130.4 mm	Length (inches)	5.134 inch
Net weight	661.8 g		

Temperatures

Operating temperature	-20 °C...55 °C
-----------------------	----------------

General data

Data interface	PROFINET PushPull RJ45 (V14)	Power interface	PROFINET PushPull Power
Protection degree	IP65	Type of mounting	4 screws
UL 94 flammability rating	V-0		

Electrical properties

Baud rate	100 MBit/s	Current consumption	100 mA
LED indicator	ACT1: activity Port1, ACT2: activity Port2, SF: general error, BF: bus error, US1: voltage 1 (electronics), US2: voltage 2, LNK1: port active, LNK2: port active	Operating voltage	24 V
Operational voltage range	18...30 V DC	Protocol	PROFINET IRT

General standards

Certificate no. (cULus)	E141197	Connector standard	IEC 61076-3-117 Var. 14
Network standard	IEC 61158, IEC 61784	PROFINET specification	Conformance Class C acc. V2.3

Classifications

ETIM 6.0	EC000732	ETIM 7.0	EC000732
ETIM 8.0	EC000732	ETIM 9.0	EC000732
ECLASS 9.0	19-17-02-06	ECLASS 9.1	19-17-01-25
ECLASS 10.0	19-17-02-06	ECLASS 11.0	19-17-02-06
ECLASS 12.0	19-17-02-06	ECLASS 13.0	19-17-02-06

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
SCIP	67cf1078-beca-4687-860b-dc475a6ec24a

Approvals

Approvals



UL File Number Search	UL Website
Certificate no. (cULus)	E141197

Creation date June 5, 2024 4:50:53 AM CEST

Catalogue status 01.06.2024 / We reserve the right to make technical changes.

IE-CDR-V14MRJ/VAPM-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Downloads**Approval/Certificate/Document of Con-
formity[Certificate](#)

Engineering Data

[CAD data – STEP](#)

Product Change Notification

[FreeCon Active Repeater](#)[FreeCon Active Repeater](#)[Technical change to FreeCon Active Cu Repeater](#)[Technische Änderung zu FreeCon Active CU Repeater](#)

Software

[Runtime Software – CFG configurator - Weidmueller_FreeCon](#)[Device description – GSDML-V2.35 COP](#)[Firmware – Firmware ABCC COP](#)

User Documentation

[Handbuch_FreeCon_Active_V1_0_de](#)[Handbuch_FreeCon_Active_V1_0_en](#)

Catalogues

[Catalogues in PDF-format](#)


IE-CDR-V14MRJ/VAPM-C

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Dimensioned drawing

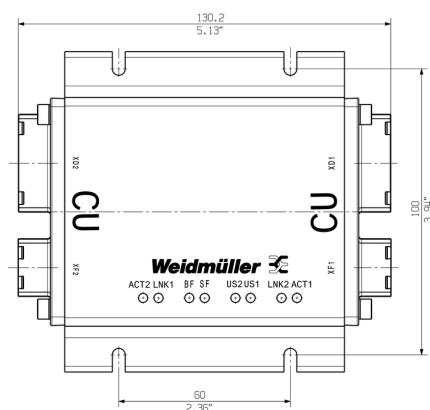

Dimensioned drawing

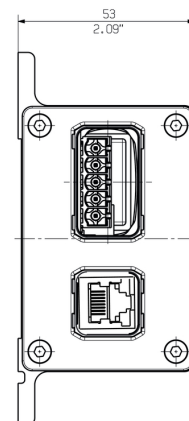

Wiring diagram

