


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER


- 2. MODIFICATIONS: END CAP
- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 13 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION) IP69K(MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: AT06-6S* PLUG (* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6	6 CONTACT SIZE AND REAR SEAL WIRE RANGE:						
	CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	TYPICAL WIRE RANGE			
	16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG (2.0-0.5mm²)			



PART NUMBER CHART			
COLOR	PART NUMBER		
GREY	AT04-6P-EC01		
BLACK	AT04-6P-EC01BLK		
BLUE	AT04-6P-EC01BLU		
BROWN	AT04-6P-EC01BRN		
GREEN	AT04-6P-EC01GRN		
RED	AT04-6P-EC01RED		
WHITE	AT04-6P-EC01WHT		
YELLOW	AT04-6P-EC01YEL		
ORANGE	AT04-6P-EC01ORG		

		REVISIONS			
REV	ECO	DESCRIPTION	DATE	BY	APPR
A3	-	RELEASE NEW DWG FORMAT	03JAN14	JARRY	-
A4	C0540S	UPDATE DIMENSIONS	04JUL16	JONY	TOMMY
A5	-	ADD COLOR OPTION	23NOV20	LOUIE	TOMMY

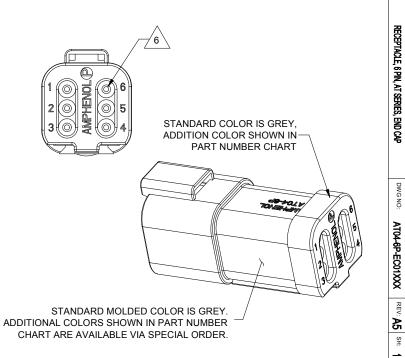

	SEE PART N	JMBER C	HART	REF: DT04-6P-E003, DT04-6P-EP04, DT04-6P-E005			
	PART N	IUMBER		DESCRIPTION			
QUANTITY		1	MAT	ERI	ALS LIST		
	UNLESS OTHERWISE SPECIFIED		ATURES	RES DATE A MAN DA DA			
	All dimensions are in metric(mm). Tolerances are as follows:		LOUIE	23NOV20	Amphenol		
2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:	ORION	25NOV20	Sine Systems - www.amphenol-sine.com		
3) Note reference =	• 🛦	ENGINEER:			44724 Morley Drive		
MATERIAL SPECIFICAT	TIONS:	APPROVAL:	TOMMY	27NOV20	Clinton Township, MI 48036		
					RECEPTACLE, 6 PIN, AT SERIES, END C	AΡ	
PROCESS SPECIFICATIONS:		INFORMATION	S IS SUPPLIED F ONLY. DESIGN	FEATURES,	, , , , , , , , , , , , , , , , , , , ,		
		SHOWN HERE THE AMPHENO OF REPRODUC	NS AND PERFORM ON ARE THE PR OL CORPORATIO CTION ARE IMPL ARE SUBJECT TO	OPERTY OF ON. NO RIGHTS JED. ALL	B C- AT04-6P-EC01XXX	A5	
NEXT ASS'Y:		MANUFACTURING VARIATIONS.		S.	SCALE: NONE SHEET 1 OF	1	

A Series™ - Contact Size 16 Options (Works with: AT, ATV, AHD-9, ARC, DuraMate and PanelMate Series)

Machined Contacts, Sockets & Pins					
Part Number	Description	Size	AWG	Туре	
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined	
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined	
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined	
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined	
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined	
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined	
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined	
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined	
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined	
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined	
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined	
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined	

Tooling - Machined Contacts				
Part Number	Part Number Description			
AUTK-16	Hand Crimp Tool, Size 16			
AUTK-100	Universal Heavy Duty Contact Crimping Tool Kit, Size 12/16/20			
CA-5D12	Universal Hand Crimp Tool, Size 12/16/20			
CA-5E12	Pneumatic Crimp Tool, Size 12/16/20			

Contact Removal Tools (For both Machined or Stamped & Formed Contacts)				
Part Number	Description			
ATRT-100	Contact and Wedgelock Extraction Tool			
AT11-310-1605	Contact Removal Tool, Plastic, Size 16			

Sealing Plugs (For both Machined or Stamped & Formed Contacts)				
Part Number Description				
A114017	Sealing Plug, Size 16, White			
A114017-SR	Sealing Plug, Size 16, SR01 Series, Black			
AT13-217-1605	Locking Sealing Plug, Size 16, Grey			
AT13-217-1605-SR	Locking Sealing Plug, Size 16, SR01 Series, Red			

Stamped & Formed Contacts, Sockets & Pins					
Part Number	Description	Size	AWG	Туре	
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-18	Stamped & Formed	
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-18	Stamped & Formed	
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-18	Stamped & Formed	
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-18	Stamped & Formed	
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed	
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed	
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed	
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed	
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	16-20	Stamped & Formed	
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	16-20	Stamped & Formed	
AT60-16-0644	Male Contact - Pin, Gold-plated	16	16-20	Stamped & Formed	
AT62-16-0644	Female Contact - Socket, Gold-plated	16	16-20	Stamped & Formed	
AT60-16-0677	Male Contact - Pin, Tin-plated	16	16-20	Stamped & Formed	
AT62-16-0677	Female Contact - Socket, Tin-plated	16	16-20	Stamped & Formed	
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed	
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed	
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed	
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed	

Tooling - Stamped & Formed Contacts		
MFX-3950	Crimp Die - Size 16, 18-20AWG	
MFX-3953	Crimp Die - Size 16, 16-18AWG	
MFX-3975	Crimp Die - Size 16, 14-16AWG	
MFX-3990	Crimp Die - Size 16, 20-22AWG	
ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG	
ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG	
ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG	