
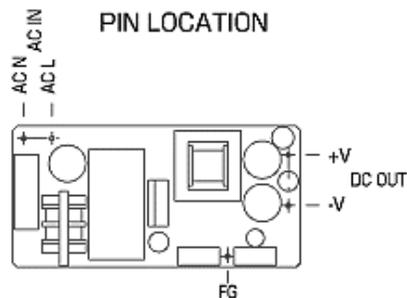


MODEL	Output Voltage	Output Current (85 ~ 264 VAC)	Efficiency (%)	Ripple & Noise (mVp-p)
KRS10F-05	5VDC	2.00A	74%	150mVp-p
KRS10F-12	12VDC	0.84A	79%	150mVp-p
KRS10F-15	15VDC	0.65A	81%	150mVp-p
KRS10F-24	24VDC	0.42A	82%	200mVp-p

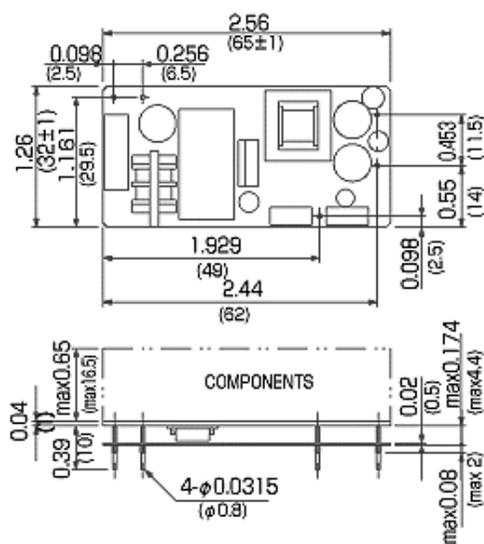

Note:

- Measurements in millimeter (mm) unless otherwise specified
- Tolerance ± 1 mm

NOTE:

All specifications typical and nominal / full load and 25°C unless otherwise noted.
 Avoid sustained operation in overload or dead short conditions.
 Specifications subject to changes without notice.