


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00126	Connector, dc plug, 5.5x2.1xL22.5 mm, brass nickel plated	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
3	24-00043	Overmold, PVC, black	1	

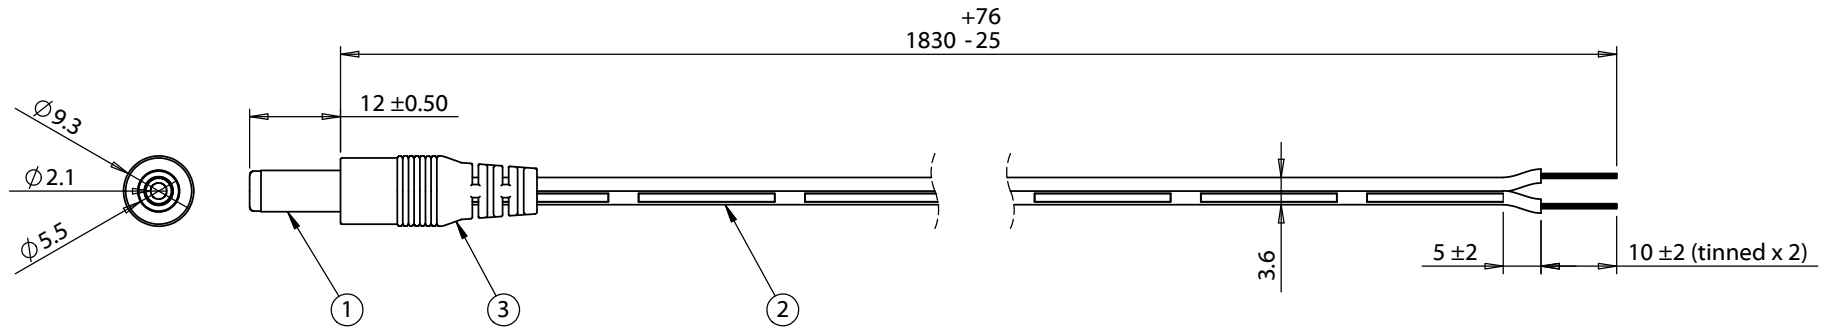

Notes:

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram	
50-00126	wire color
center	black with stripe
sleeve	black

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent Description: Cable, 1830 mm, 5.5x2.1x12 mm, 50-00126 dc plug to stripped tinned leads, 24 AWG, 30-00003 wire	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	1/19/2009	Re-issue CUI spec as Tensility	GL 2016.03.10 09:30:00 -08'00'		
A1	12/7/2010	Upgraded rating and added wire part number	Verified: LA		
A2	8/30/2011	Updated description, connector, and wire information	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		
A3	9/10/2013	Corrected cable rating		Size: A	Part number: 053-0184R (CA-2185)
				Scale: 1:1	Sheet 1 of 1