

## M12 to M12 Ethernet cable



## M12 to M12 Ethernet

We can offer the most reliable customized cables for Field bus cables. The cable length can be freely specified. Standard distance model cable is 5 meter, If you need 1 meter or more, select a long distance model.

### Technical Data

Part Number	PZBJTD050-0002
Cable Jacket	PUR
High flex	10,000,000 flex cycles
Length	5M
Connector Type side A	M12 A Code 4 pin
Connector Type side B	M12 A Code 4 pin
Ethernet Cable Type	CAT 5E

### Application

PROFINET

PROFIBUS


Ether CAT

Ethernet/IP

Device Net

## M12 to M12 Ethernet

### Interface Dimensions

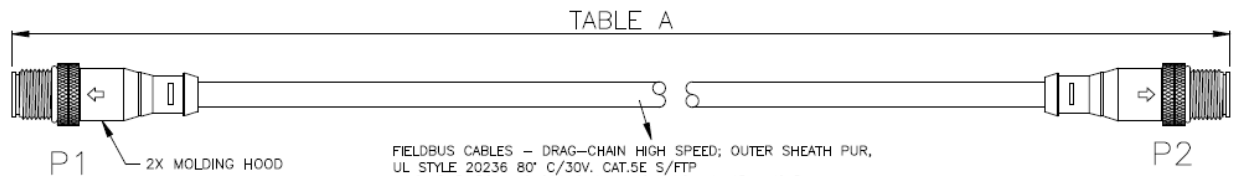

FIELDBUS CABLES – DRAG-CHAIN HIGH SPEED; OUTER SHEATH PUR,  
UL STYLE 20236 80° C/30V, CAT.5E S/FTP  
TWISTED PAIRS, 4X2X26AWG WITH NON-WOVEN TAPE INSERT,  
CONDUCTOR EXTRA FLEXIBLE BARE COPPER, INSULATION POLYETHYLEN  
SHIELD: AL/PET TAPE + TINNED COPPER BRAID O.C. ≥ 85%  
SEPARATOR EASY STRIP-AWAY TAPE  
OUTER SHEATH PUR, COLOR GREEN / RAL6018

