
T4082102003-000 - ACTIVE

M8 Connector

TE Internal #: T4082102003-000 Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Signal, TPU, A Polarization Code, Polyamide 66 GF25, 0 Power Positions, M8 Connector

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors

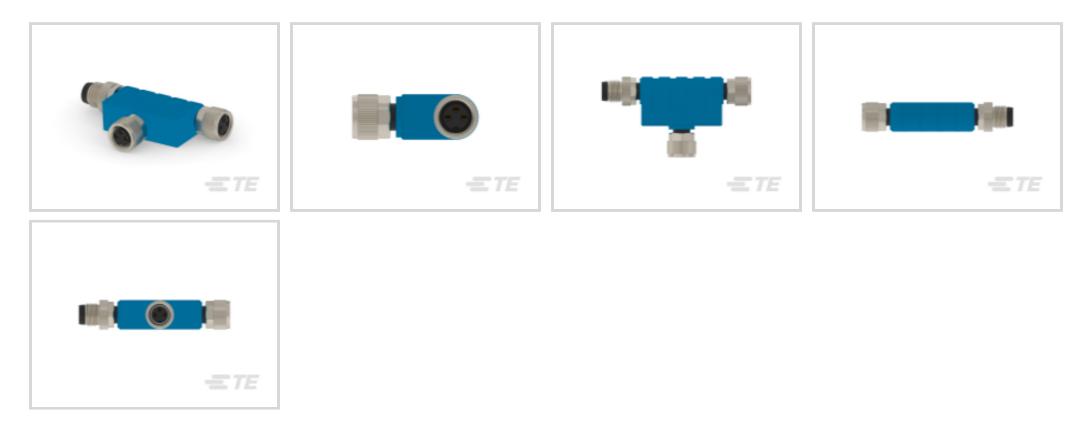

Connector System: Wire-to-Wire

Number of Positions: 3

Sealable: Yes

Contact Current Rating (Max): **3**A

Circuit Application: Signal

Features



Product Type Features

Prewired	No
Product Type	Connector Assembly
Accessory Color	Blue
Assembly Type	Electrical Connector
Connector System	Wire-to-Wire
Sealable	Yes
Circular Connector Type	Plug, Receptacle
Shell Type	Plastic
Configuration Features	
Keying & Polarized Position Locations	A
Factory Installed Backshell	No
Keying	A
Number of Positions	3
Number of Power Positions	0

Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Signal, TPU, A Polarization Code, Polyamide 66 GF25, 0 Power Positions, M8 Connector



Number of Signal Positions	3
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	60 VAC
Body Features	
Peripheral Seal Material	Silicone
Environmental Protection	IP67
O-Ring Material	Silicone
Environmental Protection Type	Sealed
Shell Base Material	TPU
Circular Connector Insulation Material Type	Polyamide 66 GF25
Contact Features	
Contact Current Rating (Max)	3 A
Reverse Gender	No
Circular Connector Contact Type	Pin/Socket
Mechanical Attachment	
Polarization Code	A
Mating Alignment Type	Keyed
Usage Conditions	
IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-25 – 85 °C[-13 – 185 °F]
Operation/Application	
Durability Rating	100 Cycles
Circuit Application	Signal
Shielded	No
ndustry Standards	
UL Flammability Rating	UL 94HB
Packaging Features	
Packaging Quantity	1

Product Compliance

C For support call+1 800 522 6752

Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Signal, TPU, A Polarization Code, Polyamide 66 GF25, 0 Power Positions, M8 Connector



For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Pb (4% in Pb-Alloy in Copper) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Saldar Pragage Capability	Not reviewed for colder process capability

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Also in the Series | M8 Connector


Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Signal, TPU, A Polarization Code, Polyamide 66 GF25, 0 Power Positions, M8 Connector



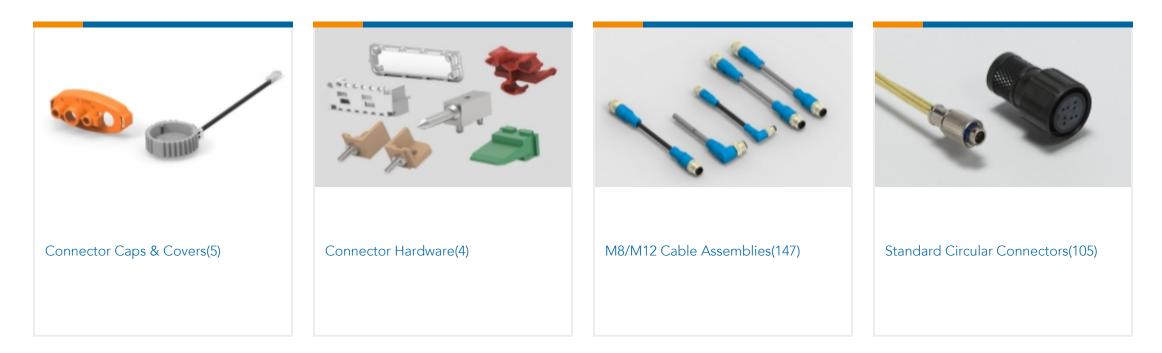

Customers Also Bought



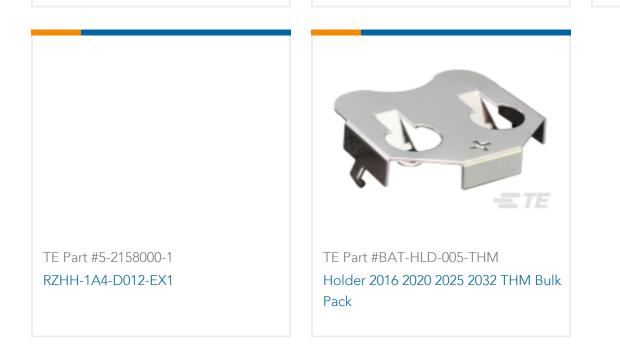

Documents

Product Drawings M8 T DISTRIBUTOR MALE 3POS

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_T4082102003-000_A.2d_dxf.zip

Standard Circular Connectors, Wire-to-Wire, 3 Position, Sealable, Signal, TPU, A Polarization Code, Polyamide 66 GF25, 0 Power Positions, M8 Connector



English

Customer View Model ENG_CVM_CVM_T4082102003-000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_T4082102003-000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

Product Specifications Application Specification

English

Application Specification

English

Agency Approvals

UL

English